


Cable Protection Duct

with perforated bottom, incl. cover without barrier wall

HKL60150.6

EAN Code: 4011126211399

the photorealistic images are to be considered as reference images

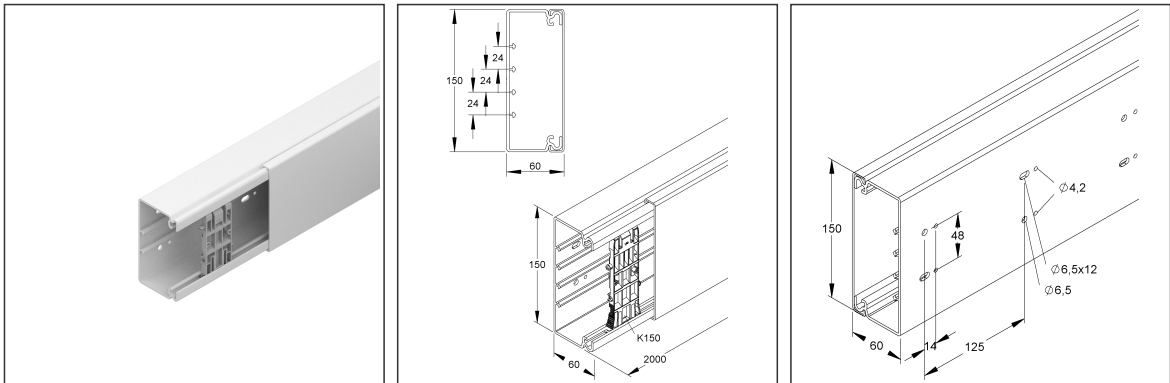

Article Description

HKL-cable protection duct, with bottom perforation, 60x150x2000 mm, Kunststoff PVC-hart, RAL 9001, cremeweiß, inkl. Zubehör

Incl. accessories

4 x K150

Additional Price Information

Article group K640

Weight

Weight per quantity unit 1,871 kg

Weight in kg per 100 187 kg

Technical Datasheet

Cable routing duct

HKL60150.6

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	150.00 mm
Width	60.00 mm
Depth/length	2000 mm

Packing Dimension

2 meters = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	2000 mm	Width	60.00 mm	Height	150.00 mm
Gross weight	3,74 kg	Volume	0,018 m³		
Min. quantity	2	Max. Quantity	2		

8 meters = 1		✓ VP2-preferred PU			
Lenght	2010 mm	Width	155.00 mm	Height	243 mm
Gross weight	16 kg	Volume	0,076 m³		
Min. Quantity	8.00	Max. Quantity	8.00		

120 meters = 1 rack					
Lenght	2090 mm	Width	1055 mm	Height	1090 mm
Gross weight	323 kg	Volume	2,403 m³		
Min. Quantity	120.00	Max. Quantity	120.00		

Tender Text

Electrical installation trunking, with cover and double-row, alternating fixing holes in the base, without barrier wall, mounting profile in the base for 4 barrier walls, including 4 retaining clips K... each 2 m delivery length, halogen-containing.

VDE certified!

Retaining clips : 4 x K150

Dimensions (approx. dimensions) H x W : 60 x 150 mm

double row of holes in the base : Ø 6.5 x 12 mm, Ø 6.5 mm and 2 x Ø 4.2 mm

Base hole spacing grid spacing : 125 mm

Row spacing : 48 mm

Delivery length L : 2000 mm

Usable cross-section : 5472 mm²

Material : PVC-hard (polyvinyl chloride)

Colour : cream white

RAL : 9001 (similar)

Kleinhuis Model no.: HKL60150.6

EP Material_____ EP Wage_____

Unit price/metre

Safety & Environment

REACH Date	23.01.2024
REACH Info	Conformable
RoHS Info	Conformable

Technical Datasheet

Cable routing duct

HKL60150.6

the photorealistic images are to be considered as reference images

Origin & International Trade

Country of origin	DE
Customs tariff number	39259020

Related items

Cover

Model No.	Description
HKLD01/150.6	Perforated cover section single, width 150 mm, combination frame, plastics PVC-hard, RAL 9001, cream white
HKLD02/150.6	Perforated cover section double, width 150 mm, combination frame, plastics PVC-hard, RAL 9001, cream white
HKLD03/150.6	Perforated cover section triple, width 150 mm, combination frame, plastics PVC-hard, RAL 9001, cream white
HKLD1P1/150.6	Perforated cover section single, width 150 mm, CEE plug devices, P1, plastics PVC-hard, RAL 9001, cream white
HKLD1P2/150.6	Perforated cover section single, width 150 mm, CEE plug devices, P2, plastics PVC-hard, RAL 9001, cream white
SVO150.6	Joint cover, width 150 mm, turning over 16 mm, plastics ASA, RAL 9001, cream white

Barrier strip

Model No.	Description
BTR65	Barrier wall, 49x2000 mm, Kunststoff PVC-hart