


Mini-Cable Protection Duct

incl. cover

LLK 16.016 E3

EAN Code: 4013339519828
Smallest packaging unit: 48 x 2 m
quantity unit: m M

the photorealistic images are to be considered as reference images

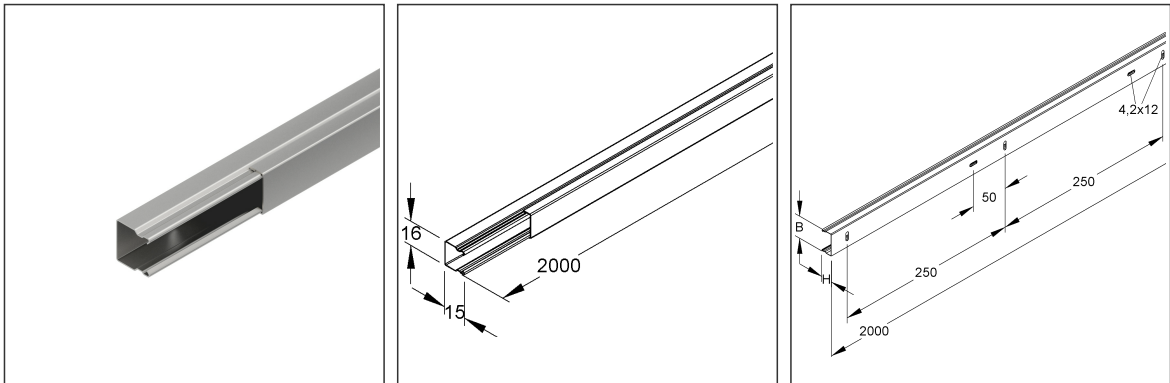

Article Description

Mini-cable protection duct with cover, 16x16x2000 mm, stainless steel, material code: 1.4301, AISI 304

Additional Price Information

Article group	N16
quantity unit	m

Weight

Weight per quantity unit	150 g / m
Weight in kg per 100	15 kg / 100m

Physical Article Dimensions

Height	16.00 mm
Width	15.50 mm
Depth/length	2000 mm

Technical Datasheet

Cable protection duct

LLK 16.016 E3

the photorealistic images are to be considered as reference images

Packing Dimension

96 meters = 1		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU			
Lenght	2020 mm	Width	125.00 mm	Height	100.00 mm
Gross weight	15 kg	Volume	0,025 m³		
Min. quantity	96.00 m	Max. Quantity	96.00 m		

2400 meters = 1 rack					
Lenght	2000 mm	Width	850 mm	Height	770 mm
Gross weight	433 kg	Volume	1,309 m³		
Min. Quantity	2.400.00 m	Max. Quantity	2.400.00 m		

Tender Text

Mini-cable protection duct, with snap-on cover and single-row fastening perforation and additional offset round perforation in the duct base, the equipotential bonding of the covers is automatic when snapped on, accessories for equipotential bonding, one splice plates LST.../LSTA... per joint, must be ordered separately.	
Dimensions (approx. dimensions)	
Height H x width W : 16 x 16 mm	
single row bottom perforation : 4.2 x 12 mm	
Bottom hole distance grid dimension : 250 mm	
Delivery length L : 2000 mm	
Usable cross section : 213 mm²	
Material : stainless steel, material no. 1.4301, AISI 304	
NIEDAX model no. : LLK 16.016 E3	
EP material_____ EP wage_____	
Unit price/meter	

Safety & Environment

REACH Date	27.06.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059

Related items

Connector

Model No.	Description
LST 16.016	Splice plate with flat plug, for height 16 mm, width 16 mm, brass
LSTA 16.016	Splice plate with flat plug, for height 16 mm, width 16 mm, brass