

Technical Datasheet

Cable Tray System



GRP-Cover for Cable Tray/-ladder

pressed, with moulded flap

KKD 250





EAN Code: 4013339956142

Smallest packaging unit: 3 m

quantity unit: m M



the photorealistic images are to be considered as reference images

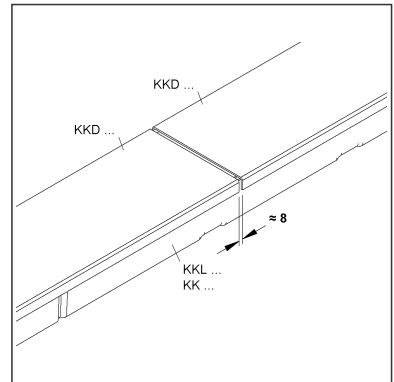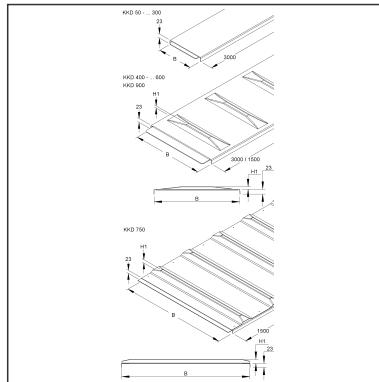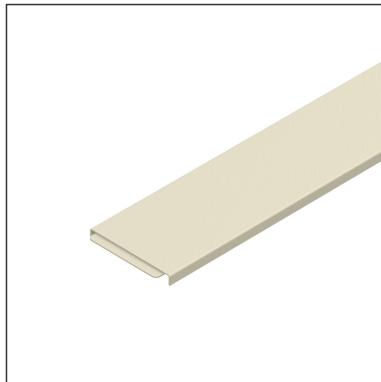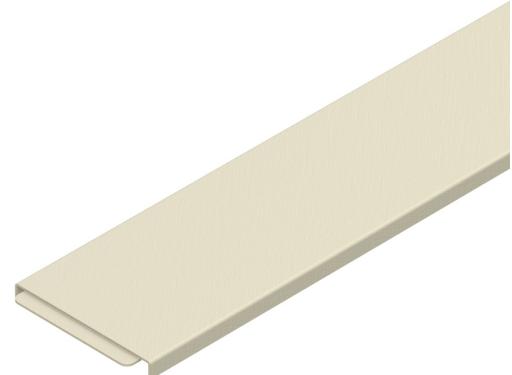

Article Description

GRP-cover for cable tray/-ladder, 250x3000 mm, Polyester glasfaserverstärkt, gepresst, RAL 7032, kieselgrau

Additional Price Information

Article group	N15
quantity unit	m

Weight

Weight per quantity unit	1,600 kg / m
Weight in kg per 100	160 kg / 100m

Physical Article Dimensions

Height	23.00 mm
Width	256 mm
Depth/length	2995 mm

Technical Datasheet

Cable Tray System

KKD 250

the photorealistic images are to be considered as reference images

Packing Dimension

3 meters = 1 piece		<input checked="" type="checkbox"/> VP1-smallest packaging unit (PU)		<input checked="" type="checkbox"/> VP1-preferred PU	
Lenght	2995 mm	Width	256 mm	Height	23.00 mm
Gross weight	4,8 kg	Volume	0,018 m ³		
Min. quantity	3.00 m	Max. Quantity	3.00 m		

516 meters = 1 rack

Lenght	2995 mm	Width	1162 mm	Height	1120 mm
Gross weight	924 kg	Volume	3,898 m ³		
Min. Quantity	516.00 m	Max. Quantity	516.00 m		

Tender Text

GRP cover for cable tray/ladder, pressed, with moulded lug to reduce deflection at the cover joint, protection against ingress of dirt as well as increasing stability with the adjacent cover, halogen-free.

The fastening can be done with cover clamps DF ... E4 in the cable tray system K² and in the cable ladder system UL with cover clamps DF... E4, cover fastenings DFUB 5.5X19 E4 or DF M, 2 pieces per metre (please order separately). Due to external influences, e.g. wind loads, the number of cover retaining springs or cover fixings must be increased.

To ensure proper and stable installation, make sure that the joints of the covers have a minimum distance of 8 mm and are arranged offset to the joint of the cable trays/cable ladders.

Article available in various resin mixtures.

Used for : GRP cable trays KKL...

KK...

GRP cable ladder ULL...

UL...

Dimensions (approx. dimensions)

Height H (outside) x width w (inside) : 23 x 250 mm

Material thickness t : 3 mm

Delivery length L : 3000 mm

Material : UP-GF (glass fibre reinforced polyester)

Colour : pebble grey

RAL : 7032 (similar)

NIEDAX Model no. : KKD 250

EP Material _____ EP Wage _____

Unit price/meter

Safety & Environment

REACH Date	27.06.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	FR
Customs tarif number	39259020