

GRP-Cover for Cable Tray/-ladder

pressed, with moulded flap


KKD 500


EAN Code: 4013339956180 Smallest packaging unit:3 m quantity unit:m M





the photorealistic images are to be considered as reference images



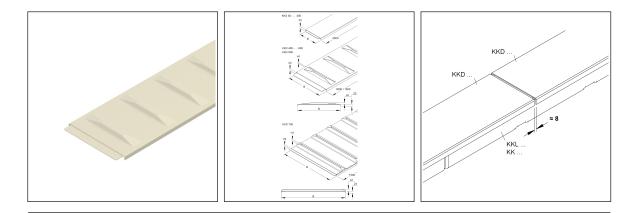

Article Description

GRP-cover for cable tray/-ladder, 500x3000 mm, Polyester glasfaserverstärkt, gepresst, RAL 7032, kieselgrau

Additional Price Information			
Article group	N15		
quantity unit	m		
Weight			
Weight per quantity unit	3,000 kg/ m		
Weight in kg per 100	300 kg / 100m		
Physical Article Dimensions			
Height			
Width	504 mm		
Depth/length	3000 mm		

KKD 500

the photorealistic images are to be considered as reference images

Packing Dimension

3 meters = 1 piec	ce	VP1-smallest p	oackaging unit (PL	J) 🧹 VP1-preferred	I PU	
Lenght	3000 mm		Width	504 mm		
Gross weight	9 kg					
Min. quantity	3.00 m	Max. Quantity	3.00 m			
180 meters = 1 rack						
Lenght	3000 mm	Width	1162 mm	Height	1120 mm	
Gross weight	638 kg	Volume	3,904 m³			
Min. Quantity	180.00 m	Max. Quantity	180.00 m			

Tender Text

GRP cover for cable tray/ladders, pressed, with beads pressed out upwards for stability and with moulded lug to reduce GRP cover for cable tray/ladders, pressed, with beads pressed out upwards for stability and with moulded lug to reduce deflection at the cover joint, protection against ingress of dirt and increased stability with the adjacent cover, halogen-free. The fastening can be done with cover clamps DF ... E4 in the cable tray system K^2 and in the cable ladder system UL with cover clamps DF... E4, cover fastenings DFUB 5.5X19 E4 or DF M, 2 pieces per metre (please order separately). Due to external influences, e.g. wind loads, the number of cover retaining springs or cover fixings must be increased. To ensure proper and stable installation, make sure that the joints of the covers have a minimum distance of 8 mm and are arranged offset to the joint of the cable travs. Article available in various resin mixtures. Used for : GRP cable trays KKL... KK... GRP cable ladder ULL... UL... Dimensions (approx. dimensions) Height H (outside) x width W (inside) : 23 x 500 mm Material thickness t : 3 mm Height of bead H1 : 12 mm Delivery length L : 3000 mm Material : UP-GF (glass fibre reinforced polyester) Colour : pebble grey RAL: 7032 (similar) NIEDAX Model no. : KKD 500

Safety & Environment

Unit price/meter

____ EP Wage_

EP Material

REACH Date	27.06.2024
REACH Info	Conformable
RoHS Info	Conformable

Technical Datasheet Cable Tray System

KKD 500

the photorealistic images are to be considered as reference images

Origin & International Trade		
Country of origin	FR	
Customs tarif number	39259020	