

Vertical Cable Ladder

rung spacing 300 mm, with continuously perforated side profiles



STL 60.203/3 F

EAN Code: 4013339921508

Smallest packaging unit: 3 m

quantity unit: m M

the photorealistic images are to be considered as reference images

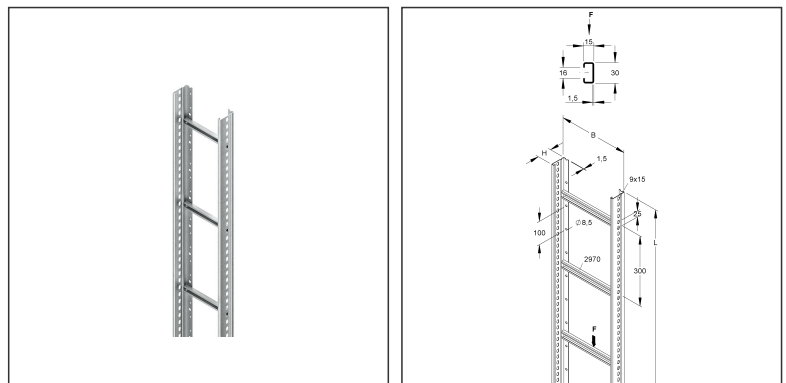

Article Description

Vertical cable ladder, 60x200x3000 mm, rung distance 300 mm, steel, hot dip galvanised DIN EN ISO 1461

Additional Price Information

Article group	N13
quantity unit	m

Weight

Weight per quantity unit	2,955 kg / m
Weight in kg per 100	296 kg / 100m

Physical Article Dimensions

Height	60.00 mm
Width	199.00 mm
Depth/length	3000 mm

Technical Datasheet

Vertical Cable Ladder System

STL 60.203/3 F

the photorealistic images are to be considered as reference images

Packing Dimension

3 meters = 1 piece		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	3000 mm	Width	199.00 mm	Height	60.00 mm
Gross weight	8,86 kg	Volume	0,036 m ³		
Min. quantity	3.00 m	Max. Quantity	3.00 m		

Tender Text

Vertical cable ladder acc. to DIN EN 61537, for wall mounting, with continuously perforated and profiled side rails, with riveted rungs made of C-profiles with 16 mm slot width. Corresponding U-clamps: B... and BK...
 Please observe additional regulations for use in functional maintenance!
 Dimensions (approx. dimensions)
 Height H x width W : 60 x 200 mm
 Material thickness side rail : 1.5 mm
 Rung distance : 300 mm
 Side rail perforation : 9 x 15 mm
 Center distance : 25 mm
 Base perforation : Ø 8.5 mm
 Center distance : 100 mm
 Load capacity with B/2 : 1.0 kN
 Delivery length L : 3000 mm
 Usable cross section : 8500 mm²
 Material : steel, hot-dip galvanised acc. to DIN EN ISO 1461
 NIEDAX Model No. : STL 60.203/3 F
 EP material _____ EP wage _____
 Unit price/meter

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059

Related items

Cover

Model No.	Description
RDHFS 9 VZL	Cover clamp, steel, electro galvanised according to DIN EN ISO 2081, blue passivate
STVW 200 F	Vertical cable ladder cover, 203x209x3000 mm, wall mounting, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories

Technical Datasheet

Vertical Cable Ladder System

STL 60.203/3 F

the photorealistic images are to be considered as reference images

Related items

Barrier strip

Model No.	Description
KLWC 16 F	Barrier strip fastening clamp, for 16 mm slot width, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories
RW 35 F	Barrier strip, 30x3000 mm, t=0,75 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories

Connector

Model No.	Description
KLVB 60/4	Splice plate, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories
KSV 60 F	Splice plate for cable ladder, height 60 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories