


Conduit- and Cable Distance Clamp

with female connection thread M6

IPA 40 G E5

EAN Code: 4046933001598
Smallest packaging unit:20 pcs.

the photorealistic images are to be considered as reference images

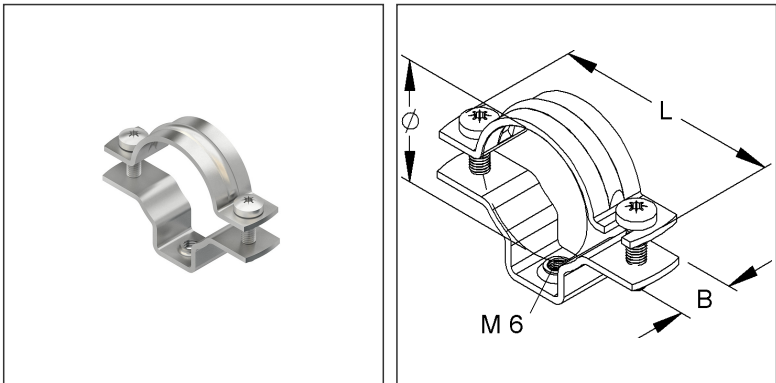

Article Description

Conduit- a. cable distance clamp, f. conduit-Ø M40, clamp. range 38-47, Edelstahl, Werkstoff-Nr.: 1.4571

Additional Price Information

Article group	FT-Rohr
quantity unit	pcs.

Weight

Weight per quantity unit	62 g / pcs.
Weight in kg per 100	6,12 kg / 100pcs.

Physical Article Dimensions

Height	54.50 mm
Width	79.20 mm
Depth/length	16.00 mm

Technical Datasheet

Electrical installation conduit

IPA 40 G E5

the photorealistic images are to be considered as reference images

Packing Dimension

1 piece = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	16.00 mm	Width	80.00 mm	Height	55.00 mm
Gross weight	0,06 kg	Volume	0,000 m³		
Min. quantity	1.00 pcs.	Max. Quantity	1.00 pcs.		

20 pieces = 1		✓ VP2-preferred PU			
Lenght	192.00 mm	Width	138.00 mm	Height	71.00 mm
Gross weight	1,31 kg	Volume	0,002 m³		
Min. Quantity	20.00 pcs.	Max. Quantity	20.00 pcs.		

200 pieces = 1 covering box					
Gross weight	13 kg	Volume	0,020 m³		
Min. Quantity	200.00 pcs.	Max. Quantity	200.00 pcs.		
Lenght	370 mm	Width	282 mm	Height	196.00 mm

Tender Text

Conduit- and cable distance clamp, with M 6 internal thread, for screwing onto screw anchors up to 8 mm thread length, for fastening push-in pipes, threaded pipes and socket pipes-fm to a flat wall/ceiling.
Please note: For safety reasons, we recommend using IPA... pipe and cable spacer clamps for overhead installations.
Used for: cables and electrical conduits according to DIN EN 61386-21
fixing plug-in pipes IESR ...
sleeve conduit-fm FM-MR ...
Dimensions (approx. dimensions)
Width W x length L : 16 x 79.7 mm
Internal connection thread : M 6
for cable clamping range-Ø : 38 - 47 mm
for pipe-Ø : 40 mm
Material complete : stainless steel, material No. 1.4571, AISI 316Ti
Fintech Model No. : IPA 40 G E5
EP Material_____ EP Wage_____
Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73269098