


Turning Bolt

incl. locking nut acc. to DIN EN ISO 10511

RDRS 9 F

EAN Code: 4013339563463
Smallest packaging unit: 20 pcs.

the photorealistic images are to be considered as reference images

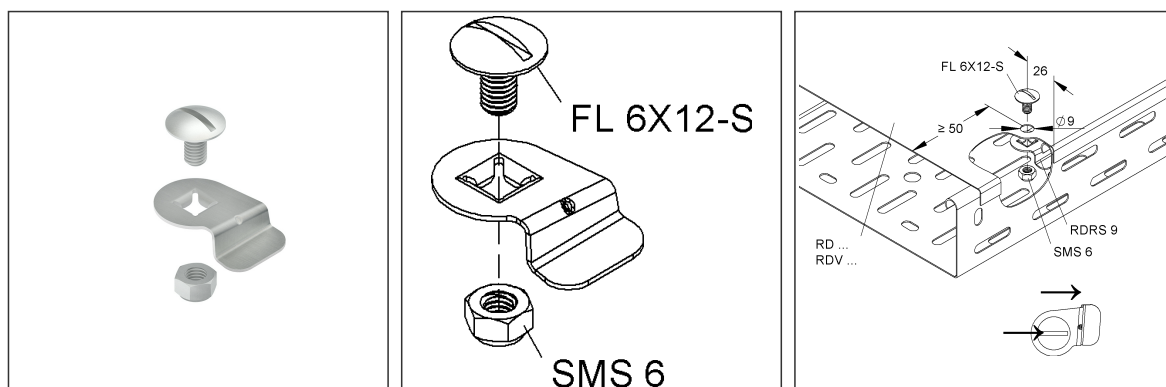

Article Description

Turning bolt with locking nut acc. to DIN EN ISO 10511, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories

Incl. accessories

1 FL 6X12-S E3, 1 SMS 6 E3

Additional Price Information

Article group	N13
quantity unit	pcs.

Weight

Weight per quantity unit	16 g / pcs.
Weight in kg per 100	1,6 kg / 100pcs.

Technical Datasheet

Cable Tray System

RDRS 9 F

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	15.00 mm
Width	22.00 mm
Depth/length	35.00 mm

Packing Dimension

20 pieces = 1		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	74.00 mm	Width	72.00 mm	Height	55.00 mm
Gross weight	0,34 kg	Volume	0,000 m ³		
Min. quantity	20.00 pcs.	Max. Quantity	20.00 pcs.		

200 pieces = 1 covering box					
Lenght	330 mm	Width	148.00 mm	Height	78.00 mm
Gross weight	3,47 kg	Volume	0,004 m ³		
Min. Quantity	200.00 pcs.	Max. Quantity	200.00 pcs.		

9600 pieces = 1					
Lenght	750 mm	Width	750 mm	Height	730 mm
Gross weight	207 kg	Volume	0,411 m ³		
Min. Quantity	9.600.00 pcs.	Max. Quantity	9.600.00 pcs.		

Tender Text

Turning lock, for subsequent or additional installation in cable tray covers, including mushroom head screw with slot FL 6X12-S E3 DIN 603, washer US M6 E3 DIN EN ISO 7089 and safety nut SMS 6 E3 DIN 985 made of stainless steel, material no. 1.4301, AISI 304.

Use outdoors, due to external influences such as wind loads, is only possible with an additional safety device (self-tapping screws, steel band, etc.) When fastening, please note that a minimum distance of ≥ 50 mm must be maintained to the cover start/end.

Furthermore, it must be ensured that the screw head slot is mounted flush with the fastening lug of the turnbuckle plate. This ensures that all twist-locks on the cover are properly closed (position of the screw head slot) at a later date. Please observe additional regulations for use in functional maintenance!

Used for: cable tray cover RD ...

RDV ...

Delivery : unassembled and loose

Material bolt : steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX Model No. : RDRS 9 F

EP Material _____ EP Wage _____

Unit price/piece

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Technical Datasheet

Cable Tray System

RDRS 9 F

the photorealistic images are to be considered as reference images

Origin & International Trade

Country of origin	DE
Customs tariff number	83024900