

11

2001SDL SLIDING DOOR LOCK TECHNICAL DETAILS

BACKSETS: 2", 2 ½", 2 ¾", 3 ¾", 5", or 6"

Custom narrow and large backsets also available

For door stiles 3 ¼" wide and up

OPERATION:

2001 SDL-1 By key, outside only

2001 SDL-2 By key, outside and inside

2001 SDL-3 By key outside, thumb turn inside (patio/entry function)

2001 SDL-4 By thumb turn, inside only

2001 SDL-5 By thumb turn inside, emergency key outside (privacy function)

2001ST CLASSROOM DEADLOCK

Key outside will project/retract deadbolt. Thumb turn inside can retract but not throw deadbolt.

*Numbers are for specification and door preparation purposes – Inside and Outside trim must be specified separately.

CASE: Heavy gauge, wrought (11/16" thick)

DEADBOLT: ½" thick, 1 7/32" high, 1" throw

THUMB TURN HUB: 3/16" (5mm) on the diamond Specialty 6mm square hub as a special order


ARMOR FRONT: Brass, bronze, or stainless steel

STRIKE: 3 ½" x 1" deadlock type standard

Custom strike for "barn doors"/wall-mounted sliding doors available as a special order

DUST BOX: Brass, stainless steel, or US10B

CYLINDER: Available to order (3/4", 1", 1 1/8" length in limited Keyways)

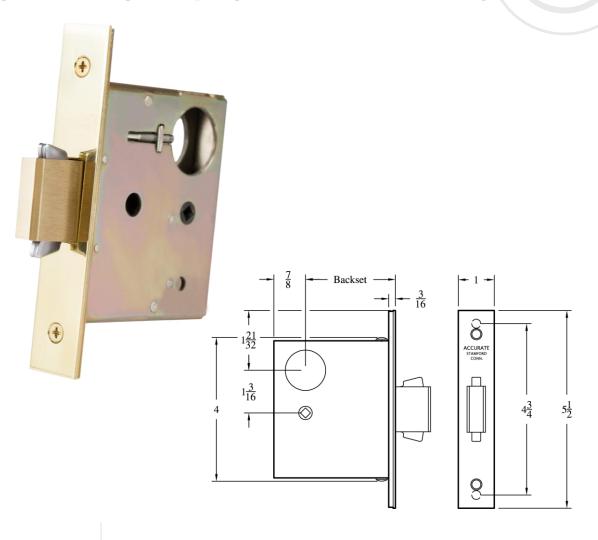

2001SDL

11

| 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1

ACCURATE LOCK & HARDWARE MANUFACTURERS OF CUSTOM LOCKS AND ARCHITECTURAL HARDWARE

1 Annie Place | Stamford, CT 06902

P: 203.348.8865 **F:** 203.348.5234

E: sales@accuratelockandhardware.com

www.accuratelockandhardware.com

AMERICAN CRAFTE

11 | 10 | 9 | 8 | 7 | 6 | 5