


VIS A METAUX TETE CYLINDRIQUE REDUITE SIX PANS CREUX

HEXAGON SOCKET HEAD CAP SCREWS LOW HEAD

ZYLINDERSCHRAUBEN MIT INNENSECHSKANT UND NIEDRIGEM KOPF

TORNILLOS CABEZA CILINDRICA BAJA CON HEXAGONO INTERIOR

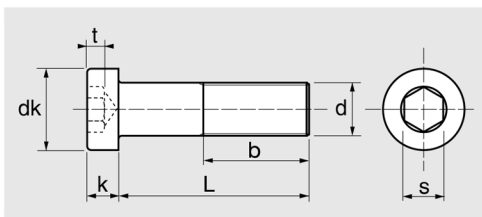

d	M 3	M 4	M 5	M 6	M 8	M 10
dk	5,5	7	8,5	10	13	16
k	2	2,8	3,5	4	5	6
s	2	2,5	3	4	5	7
t (min)	1,38	2,18	2,58	2,88	3,65	4,35
Pas	0,5	0,7	0,8	1	1,25	1,5
b (L<125)	12	14	16	18	22	26

d x L	Code	Cond.	Sur-cond.	kg/100
3X6	622203X6	200	20000	0,061
3X8	622203X8	200	20000	0,070
3X10	622203X10	200	20000	0,078
3X12	622203X12	200	7600	0,087
3X16	622203X16	200	7600	0,104
3X20	622203X20	200	7600	0,128
3X25	622203X25	200	7600	0,155
3X30	622203X30	200	7600	0,181
4X6	622204X6	200	7600	0,096
4X8	622204X8	200	7600	0,142
4X10	622204X10	200	7600	0,157
4X12	622204X12	200	7600	0,172
4X16	622204X16	200	7600	0,201
4X20	622204X20	200	7600	0,232
4X25	622204X25	200	3600	0,288
4X30	622204X30	200	3600	0,335
4X35	622204X35	200	3600	0,382
4X40	622204X40	200	1600	0,429
5X8	622205X8	200	7600	0,247
5X10	622205X10	200	7600	0,271
5X12	622205X12	200	7600	0,295
5X16	622205X16	200	3600	0,343
5X20	622205X20	200	3600	0,392
5X25	622205X25	200	3600	0,452
5X30	622205X30	200	1600	0,547
5X35	622205X35	200	1600	0,622

d x L	Code	Cond.	Sur-cond.	kg/100
5X40	622205X40	200	1600	0,696
5X50	622205X50	200	1600	0,845
6X10	622206X10	200	3600	0,413
6X12	622206X12	200	3600	0,447
6X16	622206X16	200	3600	0,516
6X20	622206X20	200	3600	0,585
6X25	622206X25	200	1600	0,671
6X30	622206X30	200	1600	0,801
6X35	622206X35	200	1600	0,909
6X40	622206X40	200	1600	1,016
6X50	622206X50	100	800	1,232
8X16	622208X16	100	1800	1,011
8X20	622208X20	100	1800	1,136
8X25	622208X25	100	800	1,292
8X30	622208X30	100	800	1,448
8X35	622208X35	100	800	1,680
8X40	622208X40	100	800	1,872
8X45	622208X45	100	800	2,064
8X50	622208X50	100	400	2,256
8X60	622208X60	100	400	2,640
10X20	622210X20	100	800	1,924
10X30	622210X30	100	800	2,417
10X35	622210X35	100	800	2,664
10X40	622210X40	100	400	2,910
10X50	622210X50	50	400	3,635
10X60	622210X60	50	200	4,238