



Bourdon tube pressure gauge for chemical applications type D9

benefits

- for chemical and process engineering applications
- measuring system fully welded to housing
- extremely robust design
- for temperatures of the medium of up to 200 °C
- tightness-tested with helium
- GOSSTANDART-certified
- Ex version (optional)

Application

For corrosive gaseous and liquid media which are not highly viscous and do not crystallise; suitable for corrosive environments.

! For measuring gas or vapour, observe the table "Selection Criteria as per EN 837-2"!

Technical Specifications

Type
D9

Nominal size
50

accuracy class
EN 837-1/6
NG 50
1.6

ranges (EN 837-1/5)
see ordering table

application area
static load: $\frac{3}{4}$ x full scale value
dynamic load: $\frac{2}{3}$ x full scale value
short-term: Full scale value

Operating temperature range

NG 50
max. 150 °C
Ambient: -20/+60 °C

Temperature performance

Indication error when the temperature of the measuring system deviates from the normal temperature of 20 °C:
at rising temperature approx. $\pm 0.4 \text{ } \%/10 \text{ K}$
falling temperature approx. $\pm 0.4 \text{ } \%/10 \text{ K}$
of full scale value

Connection

Stainless steel 316 L, bottom back

Measuring element

Bourdon tube, stainless steel 316 Ti/316 L
 $\leq 60 \text{ bar}$: "C" type tube
 $> 60 \text{ bar}$: helical tube
tightness-tested with helium

movement

Stainless steel

Dial

Aluminium, white

Scaling: black

Pointer

Aluminium, black

Housing

Stainless steel 304, with blow-out

bayonet bezel

NG 50

crimped bezel

NG 50

Stainless steel 304

window

NG 50


Plastic

Options

- Brass movement
- Back flange (NG 63)
- clamp fixing
- Ex version
- Crimped bezel, polished
- special scales
- other process connections

Technical Drawings

NG 50 – bottom back connection

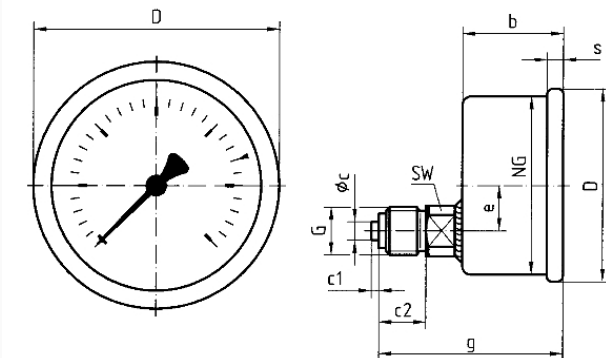

Dimensions (mm)

NG	b	Øc	c1	c2	D	e	G	g	s	SW
50	28	5	2	13	53	12,5	G ¹ / ₄ B	51	4,5	14

Versions

Range	Mounting type	Type		Part number
-1/+0 bar	direct	RF50Ch D912	●	85051912
-1/+0.6 bar	direct	RF50Ch D912	●	85052912
-1/+1.5 bar	direct	RF50Ch D912	●	85053912
-1/+3 bar	direct	RF50Ch D912	●	85054912
-1/+5 bar	direct	RF50Ch D912	●	85055912
-1/+9 bar	direct	RF50Ch D912	●	85056912
-1/+15 bar	direct	RF50Ch D912	●	85057912
0/0.6 bar	direct	RF50Ch D912	●	85059912
0/1 bar	direct	RF50Ch D912	●	85060912
0/1.6 bar	direct	RF50Ch D912	●	85061912
0/2.5 bar	direct	RF50Ch D912	●	85062912
0/4 bar	direct	RF50Ch D912	●	85063912
0/6 bar	direct	RF50Ch D912	●	85064912
0/10 bar	direct	RF50Ch D912	●	85065912
0/16 bar	direct	RF50Ch D912	●	85066912
0/25 bar	direct	RF50Ch D912	●	85067912
0/40 bar	direct	RF50Ch D912	●	85068912
0/60 bar	direct	RF50Ch D912	●	85069912

0/100 bar	direct	RF50Ch D912	●	85070912
0/160 bar	direct	RF50Ch D912	●	85071912
0/250 bar	direct	RF50Ch D912	●	85072912
0/400 bar	direct	RF50Ch D912	●	85073912
0/600 bar	direct	RF50Ch D912	●	85074912

- in-stock items
- Non-stock items