


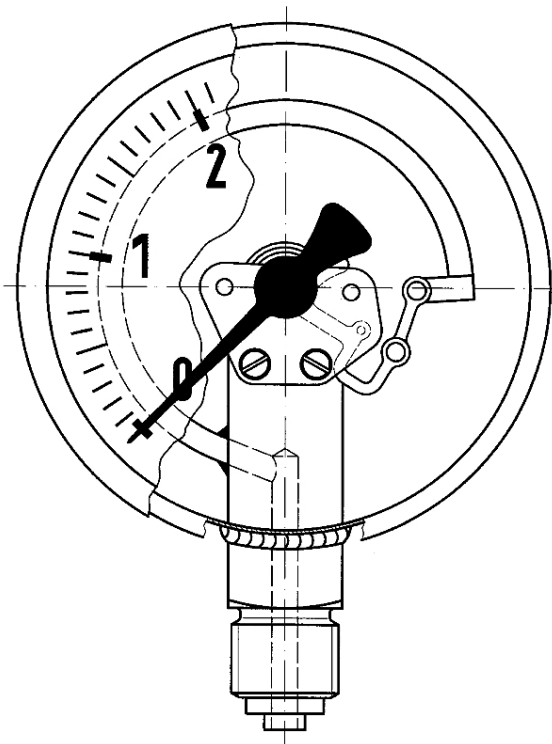

Bourdon tube pressure gauge for chemical applications type D4

benefits

- for chemical and process engineering applications
- measuring system fully welded to housing
- extremely robust design
- for temperatures of the medium of up to 200 °C
- tightness-tested with helium
- DNV- and GOSSTANDART-certified
- Ex version (optional)

Application

For corrosive gaseous and liquid media which are not highly viscous and do not crystallise; suitable for corrosive environments.
! For measuring gas or vapour, observe the table "Selection Criteria as per EN 837-2"!

Technical Specifications

Type

D4

Nominal size

63

accuracy class (EN 837-1/6)

1.6

ranges (EN 837-1/5)

see ordering table

Application area NG63

static load: $\frac{3}{4}$ x full scale value
dynamic load: $\frac{2}{3}$ x full scale value
short-term: Full scale value

Operating temperature range

Medium: max. 200 °C
Ambient: -20/+60 °C

Temperature performance

Indication error when the temperature of the measuring system deviates from the normal temperature of 20 °C:
at rising temperature approx. ± 0.4 %/10 K
falling temperature approx. ± 0.4 %/10 K
of full scale value

Connection

Stainless steel 316 L, centre back
G $\frac{1}{4}$ B, SW14 (EN 837-1/7.3)

Measuring element

Bourdon tube, stainless steel 316 Ti/316 L
 ≤ 60 bar: "C" type tube
> 60 bar: helical tube
tightness-tested with helium

movement

Stainless steel

Dial

Aluminium, white
Scaling: black

Pointer

Aluminium, black

Housing

Stainless steel 304, with blow-out

bayonet bezel

Stainless steel 304

window


Laminated safety glass

Options

- back flange
- Panel mounting bezel
- 3-hole fixing, panel mounting bezel
- Ex version
- Crimped bezel, polished
- Electrical contacts
- special scales
- other process connections

Technical Drawings

Centre back connection, panel mounting bezel with clamp fixing

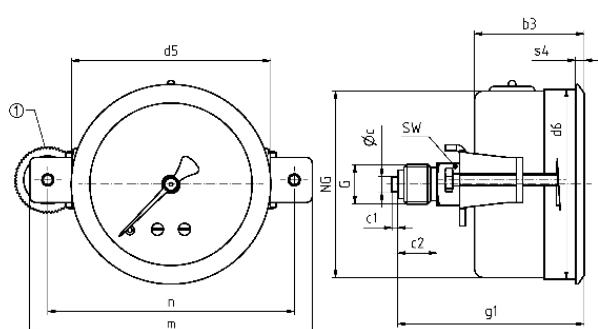

Versions

Range	Mounting type	Type		Part number
-1/+0 bar	Panel mounting bezel, with clamp fixing	RF63Ch D452	●	85101452
-1/+0.6 bar	Panel mounting bezel, with clamp fixing	RF63Ch D452	●	85102452
-1/+1.5 bar	Panel mounting bezel, with clamp fixing	RF63Ch D452	●	85103452
-1/+3 bar	Panel mounting bezel, with clamp fixing	RF63Ch D452	●	85104452
-1/+5 bar	Panel mounting bezel, with clamp fixing	RF63Ch D452	●	85105452
-1/+9 bar	Panel mounting bezel, with clamp fixing	RF63Ch D452	●	85106452
-1/+15 bar	Panel mounting bezel, with clamp fixing	RF63Ch D452	●	85107452
0/0.6 bar	Panel mounting bezel, with clamp fixing	RF63Ch D452	●	85109452
0/1 bar	Panel mounting bezel, with clamp fixing	RF63Ch D452	●	85110452
0/1.6 bar	Panel mounting bezel, with clamp fixing	RF63Ch D452	●	85111452
0/2.5 bar	Panel mounting bezel, with clamp fixing	RF63Ch D452	●	85112452
0/4 bar	Panel mounting bezel, with clamp fixing	RF63Ch D452	●	85113452
0/6 bar	Panel mounting bezel, with clamp fixing	RF63Ch D452	●	85114452
0/10 bar	Panel mounting bezel, with clamp fixing	RF63Ch D452	●	85115452
0/16 bar	Panel mounting bezel, with clamp fixing	RF63Ch D452	●	85116452
0/25 bar	Panel mounting bezel, with clamp fixing	RF63Ch D452	●	85117452
0/40 bar	Panel mounting bezel, with clamp fixing	RF63Ch D452	●	85118452
0/60 bar	Panel mounting bezel, with clamp fixing	RF63Ch D452	●	85119452

0/100 bar	Panel mounting bezel, with clamp fixing	RF63Ch D452	●	85120452
0/160 bar	Panel mounting bezel, with clamp fixing	RF63Ch D452	●	85121452
0/250 bar	Panel mounting bezel, with clamp fixing	RF63Ch D452	●	85122452
0/400 bar	Panel mounting bezel, with clamp fixing	RF63Ch D452	●	85123452
0/600 bar	Panel mounting bezel, with clamp fixing	RF63Ch D452	●	85124452
0/1000 bar	Panel mounting bezel, with clamp fixing	RF63Ch D452	●	85125452

● in-stock items

● Non-stock items