



## Stainless steel Bourdon tube pressure gauges RF40E

Part no. 85015312

Stainless steel Bourdon tube pressure gauges Type D3

### benefits

- extremely compact design
- wetted parts and movement made of stainless steel
- Pressure connection welded to housing
- optional for control cabinet mounting
- tightness-tested with helium
- GOSSTANDART-certified

### Application

For corrosive gaseous and liquid media which are not highly viscous and do not crystallise.

! For measuring gas or vapour, observe the table "Selection Criteria as per EN 837-2" (see appendix)!

### Technical Specifications

#### Type

D3

#### Nominal size

40

#### accuracy class (EN 837-1/6)

2.5

#### ranges (EN 837-1/5)

see ordering table

#### application area

static load:  $\frac{3}{4}$  x full scale value  
dynamic load:  $\frac{2}{3}$  x full scale value  
short-term: Full scale value

#### Operating temperature range

Medium: max. 100 °C  
Ambient: -20/+60 °C

#### Temperature performance

Indication error when the temperature of the measuring system deviates from the normal temperature of 20 °C:  
at rising temperature approx.  $\pm 0.4$  %/10 K  
falling temperature approx.  $\pm 0.4$  %/10 K  
of full scale value

#### Degree of protection

IP 32 (EN 60529)

#### Connection

Stainless steel 316 L, centre back

#### Measuring element

Bourdon tube, Stainless steel 316 L  
 $\leq 60$  bar: "C" type tube  
 $> 60$  bar: helical tube  
tightness-tested with helium

#### movement

Stainless steel

#### Dial

Aluminium, white  
Scaling: black

**Pointer**

Aluminium, black

**window**

Plastic, clipped in

**Housing**


Stainless steel 304

**Options**

- 3-hole fixing, panel mounting bezel
- special scales
- other process connections
- oil- and grease-free version

**Technical Drawings**

**NG 40 – centre back connection G $\frac{1}{8}$**

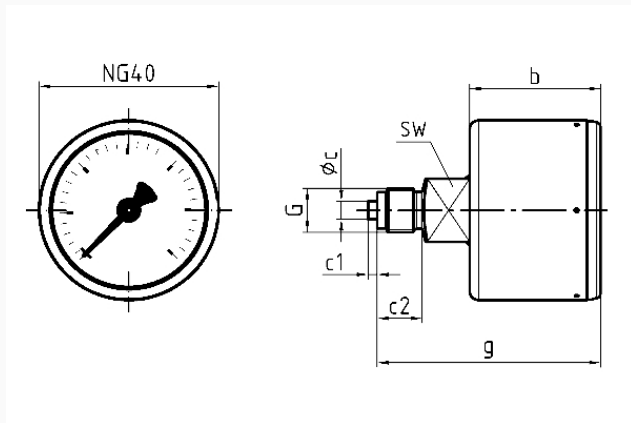

**Dimensions (mm)**

| NG | b  | ∅c | c1 | c2 | G                 | g    | SW |
|----|----|----|----|----|-------------------|------|----|
| 40 | 29 | 4  | 2  | 10 | G $\frac{1}{8}$ B | 49,5 | 14 |

**Versions**

| Range    | Mounting type | Type          | Part number |
|----------|---------------|---------------|-------------|
| 0/10 bar | direct        | RF40E<br>D312 | 85015312    |

● in-stock items

● Non-stock items