

Standard capsule pressure gauges KP100Dif

Part no. 35567411

Standard capsule pressure gauges for differential pressure type D4

benefits

- Measurement of extremely small differential pressures
- robust design
- static pressures up to 400 mbar
- direct indication of the differential pressure
- many customised versions available

Application

For differential pressure measurement of non-corrosive, gaseous, dry media. Especially suitable for filter loss measurement in air conditioning and ventilation applications.

! For measuring gas or vapour, observe the table "Selection Criteria as per EN 837-2" (see appendix)!

Technical Specifications

Type

D4

Nominal size

100

Function

The "plus" pressure (= high pressure) is applied to the inside of the diaphragm. The "minus" pressure (= low pressure) is applied to the inside of the pressure-tight housing. The pressure difference causes the diaphragm to change its shape, thus generating the movement required to measure the pressure. This displacement is picked up by the movement. The differential pressure is directly indicated by a pointer.

accuracy class

EN 837-3/6

≥ 0/25 mbar

1.6

ranges (EN 837-3/5)

see ordering table

application area

static load: Full scale value

dynamic load: 0.9 x full scale value

Overpressure safety

Full scale value

maximum static pressure

400 mbar

Operating temperature range

Medium: max. 60 °C

Ambient: -20/+60 °C

Temperature performance

Indication error when the temperature of the measuring system deviates from the normal temperature of 20 °C:

at rising temperature approx. ± 0.6 %/10 K

falling temperature approx. ± 0.6 %/10 K

of full scale value

Degree of protection

IP 66 (EN 60529)

Connection

Brass
centre back, parallel, below each other
2 x G½B, SW22 (EN 837-3/7.3)

Measuring element (wetted part)

Capsule element, CuBe alloy

Movement (wetted part)

Brass

Zero correction

from the front

Seal (wetted part)

NBR (Perbunan)

Dial (wetted part)

Aluminium, white
Scaling: black

Pointer (wetted part)

Aluminium, black

Housing (wetted part)

Stainless steel 304

bayonet bezel

Stainless steel 304

Window (wetted part)


Plastic (PMMA)

Options

- back flange
- 3-hole fixing, panel mounting bezel
- hose connections
- special scales
- other process connections

Technical Drawings

NG 100/160 – centre back connection

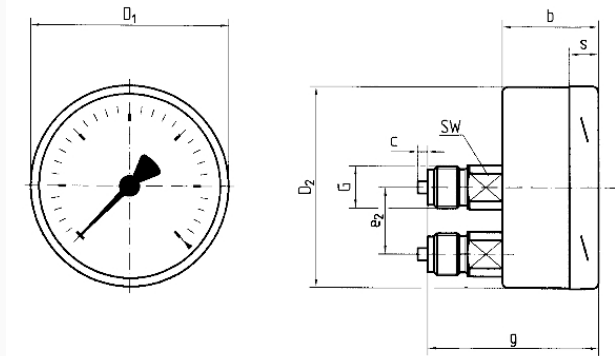

Dimensions (mm)

| NG | b | c | D1 | D2 | e2 | g | G | s | SW |
|-----|----|---|-----|-----|------|----|-----|----|----|
| 100 | 49 | 3 | 101 | 99 | 34,5 | 79 | G½B | 20 | 22 |
| 160 | 49 | 3 | 161 | 159 | 34,5 | 79 | G½B | 20 | 22 |

Versions

| | | housing ø | Housing | accura- cy class | Connec- tion | Ausrich- tung | Range | Type | | Part no. |
|----------|------|--------------|-----------------------------|---------------------|-----------------|------------------|--------------|------------------|---|----------|
| KP100Dif | D411 | 100 mm | Stain- less steel 304 | 1.6 | 2 x G½B | | 0/40 mbar | KP100Dif D411 | ● | 35567411 |

● in-stock items

● Non-stock items