

STAINLESS STEEL JET PUMPS



WATER PUMPS

PASSS80

APPLICATION

- Clean water without abrasive particles
- Domestic use, irrigation of gardens and allotments etc.
- High head
- Suitable for water lifting, distribution with small or medium pressure sets
- Installed in enclosed places, or at least protected against inclement weather

OPERATING CONDITIONS

- Suction lift up to 6 m
- Liquid temperature up to +40°C
- Ambient temperature up to +40°C
- Max. working pressure: 6 bar


MOTOR

- 2-Pole induction motor
- Single-phase 50 Hz
- 0.75 kW
- Insulation: Class B
- Protection: IP44
- With capacitor and thermal overload protection

MATERIALS

- Pump Body - Cast Iron
- Motor Bracket - Aluminium
- Impeller - Stainless Steel
- Shaft with Rotor - Stainless Steel
- Ejector - POM
- Mechanical seal - Ceramic
- 100% Copper winding

FLOW (ℓ/h)	PRESSURE (bar)
3010	0.2
2410	1.2
2000	1.8
1500	2.5
1020	3.2
500	4.0
0	4.8

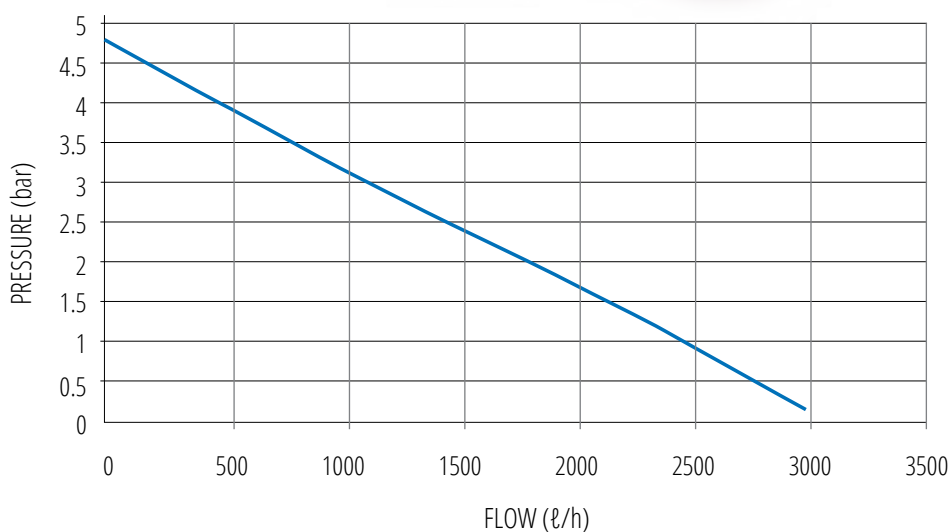

POWER (W)	VOLTAGE (V)	INLET	OUTLET	MAX FLOW (ℓ/h)	MAX HEAD (m)
750	230	1"	1"	3000	48

STAINLESS STEEL JET PUMP WITH FLOW CONTROL

PASSSSK

PASCALI stainless steel jet pump with flow control, for domestic and garden irrigation use. Thermal overload protection, 100% copper winding and stainless steel impeller.



FLOW SWITCH
PASSK10

Max 10 Amps.

Non return valve included.

STAINLESS STEEL JET PUMP WITH PRESSURE CONTROL

PASSS/24

PASCALI stainless steel jet pump with 24 ℓ SS pressure tank, for domestic and garden irrigation use. Thermal overload protection, 100% copper winding and stainless steel impeller.



24L TANK
Complete
stainless steel tank.

Non return valve included.