

## VP6030CTM

60 x 30 x 18



PROFESSIONAL

### FEATURES

- Above Floor Rough (AFR)
- Pre-Leveled base
- Slip resistant, textured bottom
- Available in White only
- Left, right drain
- Modern, matte finish
- 15-year residential limited warranty

### OPTIONS

- Coordinating wall sets available

### PACKAGED DIMENSIONS

- 62 1/2 x 34 x 21 1/4

### VERITEK PRO

Lightweight and durable, Veritek Pro is produced with Swan Solid Surface, a proprietary SMC compound.

Veritek Pro is the better bathroom solution and is a snap to install!

Available in the Following Offerings:

Depth	Width	Height Standard	Height AFR	Model Number	
				Standard	AFR
30	60	15	18	VP6030CT	VP6030CTM


- **Standard:** Base model shower, tub, or tub shower offering
- **Above Floor Rough (AFR):** Clearance for drain placement, eliminating the need for drain relocation



# VP6030CTM

60 x 30 x 18 inches

AFR: Allows for above the floor installation of waste, overflow and drainage.

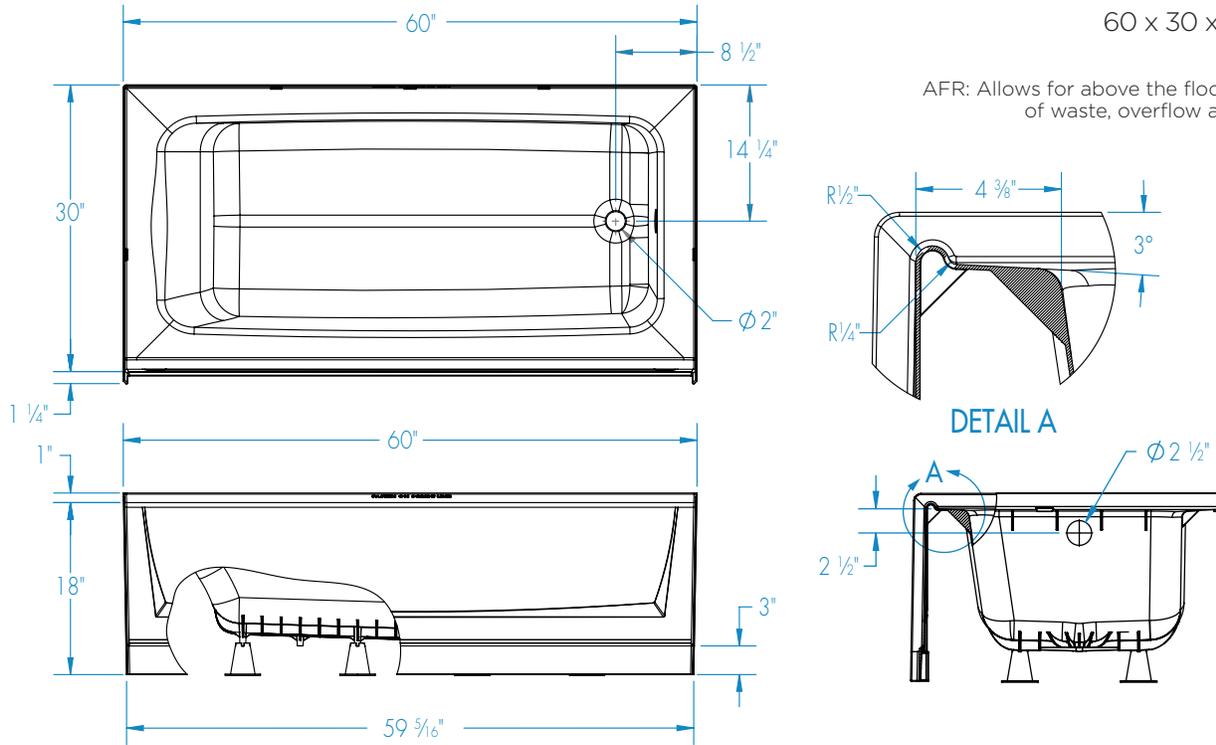
**FEATURES** Dimensional Tolerance  $\pm 3/8"$ . Dimensions needed for site preparation should be measured from the unit. Manufacturer assumes no responsibility for preparatory work.

Type	Model #	Material	Height	Drain	Net Wt. lbs.	Pkg. Wt. lbs.
AFR Soaker	VP6030CTML/R	Swan Solid Surface	18	LH or RH	54	59


## DIMENSIONS

Specifications	inches
<b>Width:</b> Overall / Net	60
<b>Depth:</b> Overall / Net	31 1/4 / 30
<b>Height:</b> Overall / Net	19 1/2 / 18
<b>Enclosure Opening</b>	-
<b>Skirt Height</b>	18
<b>Drain Rough-In</b> (from Back Wall)	14 1/4
<b>Drain Rough-In</b> (from Side Wall)	2 7/8
<b>Drain:</b> Diameter / Clearance	2 / 3 1/2

## FRAMING DIMENSIONS

 inches

Type	D Depth	W Width	H Height	A	B	C
Alcove	31 1/4	60	19	Box Out	2 7/8	14 1/4

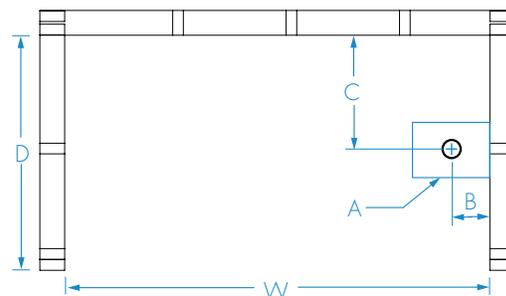

## SUMP DATA

Top of Drain to Bottom of Overflow	Capacity to Overflow gal	Min. Operating Capacity gal	WIDTH @ centerline		DEPTH @ centerline	
			Top	Bottom	Top	Bottom
9 7/8	37	-	51 1/2	45 1/2	22 1/4	20 1/2

Rev. 04.04.22