

SUBMITTAL INFORMATION



Adapter Flange (UFA900-C-x series)

UNI-FLANGE SERIES 900 ADAPTER FLANGE FOR DUCTILE IRON PIPE O.D. PVC PIPE

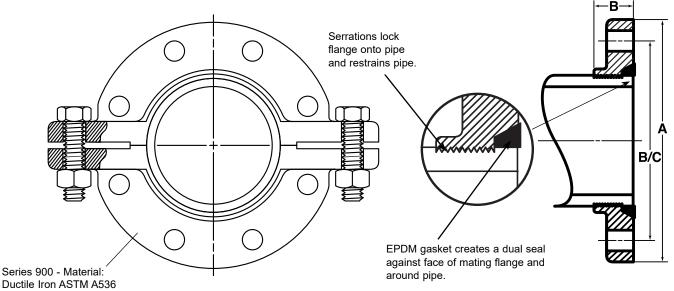

Ductile Iron ASTM A536 Grade 65-45-12

Color Code: Red for PVC with ductile iron pipe O.D.

Nом.	DUCTILE IRON PIPE		APPROX.	DIMENSIONS			BOLT	FLANGE BOLTS		CLAMPING BOLTS			
Pipe Size	OD	CATALOG NO.	Wт. Lbs.	OD A	Thickness B	Bolt Center BC	Hole Dia.	No.	Size	No.	Size	NO. OF BOLT HOLES	✓ SUBMITTED ITEM(S)
4"	4.80	UFA900-C-4	11	9"	1-1/2"	7-1/2"	3/4"	8	5/8"x3"	2	5/8"x3"	8	
6"	6.90	UFA900-C-6	19	11"	1-9/16"	9-1/2"	7/8"	8	3/4"x3-1/4"	2	5/8"x3"	8	
8"	9.05	UFA900-C-8	29	13-1/2"	1-7/8"	11-3/4"	7/8"	8	3/4"x3-1/2"	2	3/4"X3-1/2"	8	
10"	11.10	UFA900-C-10	39	16"	2"	14-1/4"	1"	12	7/8"x6"	2	7/8"x6"	12	
12"	13.20	UFA900-C-12	54	19"	2-3/4"	17"	1"	12	7/8"x6"	2	7/8"x6"	12	

Nom. Size	PIPE STANDARD	Түре	PRESSURE RATING (PSI)
		DR-14	200
4" - 12"	AWWA C-900	DR-18	150
		DR-25	100

FEATURES

- Series 900 flanges meet all test requirements of AWWA C-900
- Flanges drilling ANSI B16.1 125 lb. / ANSI B16.5 150 lb
- Gasket is EPDM (-65° to 250° F) and is suitable for water, wastewater, ozones and strong oxidizing chemicals

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.

The Ford Meter Box Company, Inc. P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443 Phone: 260-563-3171 / Fax: 800-826-3487 Overseas Fax: 260-563-0167 www.fordmeterbox.com 09/08/16	Submitted By:
---	---------------