

# CAMBRIDGE®



Cambridge is a laminated, two-piece asphalt shingle, manufactured on a robust fiberglass reinforcement.

## 1 Features and Benefits

- ✓ Class 3 Impact Resistance Rating<sup>3</sup>
- ✓ Full Square Coverage
- ✓ Advantage Size
- ✓ Blue-Green Algae Resistant
- ✓ Proprietary FastLock® Sealant

## Fiberglass-Reinforced Asphalt Shingles

IKO Cambridge shingles feature a durable fiberglass mat and a thick asphalt coating, enabling them to achieve a Class 3 impact resistance rating. Their dimensional profile and deep shadow bands replicate the natural beauty of wood shakes, delivering a high-end look at an affordable price. The Cambridge “Advantage” size is larger than many competitors’ products, allowing for faster installation. Unlike other laminated shingle brands, just three bundles cover a full square (100 square feet) of roof area.

## 2 General Information

|                            |   |
|----------------------------|---|
| Shingles/Bundle            | 20  |
| Coverage/Bundle            | 33.3 ft. <sup>2</sup> (3.1 m <sup>2</sup> ) |
| Coverage/Three Bundles     | 100 ft. <sup>2</sup> (9.29 m <sup>2</sup> ) |
| Bundles/Pallet             | 56  |
| Pallet Size                | 40 x 53 1/2 in.<br>(102 x 136 cm)           |
| Product Stock No. (U.S.)   | 4220XXX                                     |
| Product Stock No. (Canada) | 4221XXX                                     |

**NOTE:** XXX refers to numerical product color code. Product color availability varies by region.

## 3 Product Dimentions

|          |                       |
|----------|-----------------------|
| Length   | 40 7/8 in. (1,038 mm) |
| Width    | 13 3/4 in. (349 mm)   |
| Exposure | 5 7/8 in. (149 mm)    |

Product dimensions shown are subject to normal manufacturing tolerances of +/- 1/4 in. (6 mm) on the shingle's length and +/- 1/8 in. (3 mm) width.

Click [here](#) or scan this QR code for product literature, color swatches and color availability.



# CAMBRIDGE®

## 4 Applicable Standards<sup>1</sup>

ASTM D3462 Product Standard

ASTM D3018 Product Standard

ASTM D3161 Class F Wind Test

ASTM D7158 Class H Wind Test

ASTM E108 Class A Fire Test<sup>2</sup>

UL 790 Class A Fire Test<sup>2</sup>

CAN/ULC S107 Class A Fire Test (Canada)<sup>2</sup>

UL 2218 Class 3<sup>3</sup> [here](#)

CSA A123.5 Product Standard (Canada)

FM 4473 Class 3 Impact Resistance Test<sup>3</sup>

Miami-Dade Product Approval<sup>4</sup> [here](#)

Florida Building Code High-Velocity Hurricane Zone (HVHZ) Approval<sup>4</sup> [here](#)

Texas Department of Insurance Details [here](#)

**NOTE:** IKO Cambridge asphalt shingles meet or exceed the requirements in the product standards referenced at the time of manufacture.

## 5 Safety Information

**CAUTION:** Working at heights on sloped-roof surfaces can be dangerous. Do not install until all appropriate safety precautions are followed. Always wear appropriate personal protective equipment (PPE), including appropriate fall protection equipment.



This product's Safety Data Sheet (SDS) is available [here](#).


The information on this Technical Data Sheet is based upon data considered to be true and accurate at time of issue, based on laboratory tests and production measurements, and is offered solely for the user's consideration, investigation and verification. Nothing contained herein is representative of a warranty or guarantee for which the manufacturer can be held legally responsible. The manufacturer does not assume any responsibility for any misrepresentation or assumptions the reader may formulate. To confirm the most current product technical information and compliances, please contact IKO directly at: **United States 1-888-IKO-ROOF (1-888-456-7663); Canada 1-855-IKO-ROOF (1-855-456-7663).**

<sup>1</sup>Compliance with listed product standards is based on sampling and testing of products as manufactured. <sup>2</sup>When shingles are installed over an approved underlayment.


<sup>3</sup>The Impact Resistance rating is solely for the purpose of enabling residential property owners to obtain a reduction in their residential insurance premium, if available. It is not to be construed as any type of express or implied warranty or guarantee of the impact performance of this shingle by the manufacturer, supplier or installer, and damage from hail is not covered under the Limited Warranty. For further details concerning the FM 4473 standards, visit the FM Approvals website. <sup>4</sup>M-D and FBC HVHZ approvals apply only to shingles available in the southeast U.S. market. For more information, please contact IKO at: **1-888-IKO-ROOF (1-888-456-7663).**

## 6 Shingle Installation

4 Nails for Standard Application

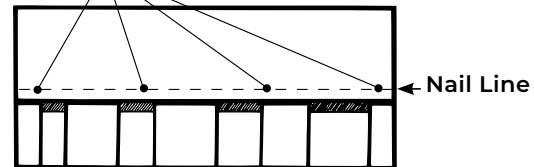

6 Nails for Steep-Slope Applications

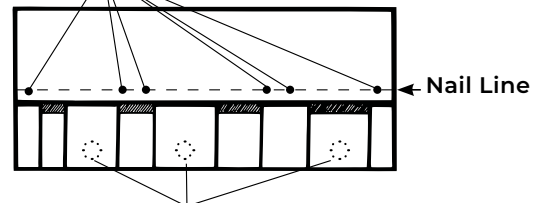

**Apply Roofing Cement** CAUTION: Excessive Use of Roofing Cement Can Cause Shingles to Blister.

**Shingles must be installed according to all of IKO's application instructions. Some select installation requirements are highlighted here.**

1. The space beneath the roof deck (e.g., attic) should be thoroughly ventilated to minimum local building code requirements.
2. Shingles should be installed with 5 7/8-inch shingle exposure to the weather.
3. Offsets between courses are recommended to be 10 inches.
4. It is critical that nails are located in the nail line so that nails penetrate both shingle layers.
5. Open metal valleys are recommended for best roof system performance.
6. Never apply asphalt shingles to roof slopes less than 2:12. For slopes 2:12 to less than 4:12 (low slope), see special underlayment requirements outlined in the IKO application instructions.



Complete product installation details can be found [here](#).