


## GAS-SPEZIFIKATIONEN

<b>Modellkennung</b>	10035934, 10035935, 10035936							
<b>Beschreibung</b>	Gas-Feuerstelle							
<b>Gasart</b>	Butan mit 28~30 mbar / Propan mit 37 mbar		Flüssiggas- Gemisch		Flüssiggas- Gemisch		Flüssiggas- Gemisch	
<b>Gaskategorie</b>	I <sub>3+</sub> (28-30/37)		I <sub>3B</sub> /P(30)		I <sub>3B</sub> /P(37)		I <sub>3B</sub> /P(50)	
<b>Wärmeeintrag (HS)</b>	13 kW (946,4 g/h)		13 kW (946,4 g/h)		13 kW (946,4 g/h)		13 kW (946,4 g/h)	
<b>Gasdruck</b>	Butan (G30)	Propan (G31)	Butan (G30)	Propan (G31)	Butan (G30)	Propan (G31)	Butan (G30)	Propan (G31)
	28-30 mbar	37 mbar	30 mbar		37 mbar		50 mbar	
<b>Injektor- Durchmesser (Ø)</b>	1,84 mm		1,84 mm		1,74 mm		1,59 mm	
<b>Zielländer (Ländercode)</b>	GB, BE, CY, CZ, FR, GR, IE, IT, LV, LT, LU, PT, SK, SI, ES, CH		AL, BE, BG, CY, H, R, DK, EE, FI, FR, HU, IS, IT, LT, LU, MT, MK, NL, NO, RO, SK, SI, S, E, TR		PL		AT, DE, SK, CH	
<b>Gasdruckregler</b>	nach EN 12864 zertifiziert (Durchflussrate: max. 1,5 kg/h)							
<b>Gasschlauch</b>	nach EN-Standard zertifizierter Schlauch (max. 3,0 m)							
<b>Primäre Luftregulierung</b>	Fixiert - nicht anpassbar							
<b>Gerätgewicht</b>	50 kg							
<b>Gasflasche</b>	Standardgasflasche (5 kg empfohlen)							

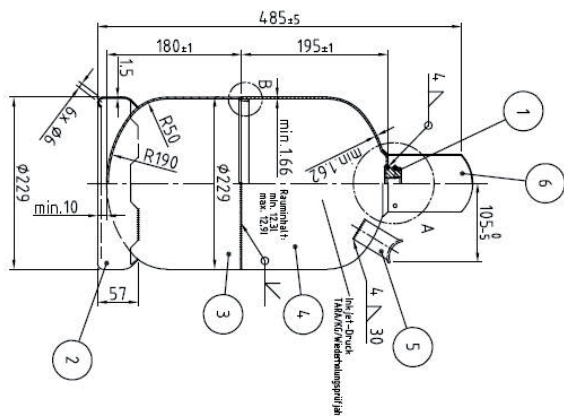

CE


2575-21

PIN-Nr. 2575DM28154

**Chal-Tec GmbH**  
Wallstraße 16  
10179 Berlin  
Deutschland

# GAS SPECIFICATIONS

<b>Model identifier</b>	10035934, 10035935, 10035936							
<b>Description</b>	Gas fire pit							
<b>Gas type</b>	Butane mit 28~30 mbar / Propane mit 37 mbar		Liquefied petroleum gas mixture		Liquefied petroleum gas mixture		Liquefied petroleum gas mixture	
<b>Gas category</b>	I <sub>3+</sub> (28-30/37)		I <sub>3B/P(30)</sub>		I <sub>3B/P(37)</sub>		I <sub>3B/P(50)</sub>	
<b>Heat input (HS)</b>	13 kW (946.4 g/h)		13 kW (946.4 g/h)		13 kW (946.4 g/h)		13 kW (946.4 g/h)	
<b>Gas pressure</b>	Butane (G30)	Propane (G31)	Butane (G30)	Propane (G31)	Butane (G30)	Propane (G31)	Butane (G30)	Propane (G31)
	28-30 mbar	37 mbar	30 mbar		37 mbar		50 mbar	
<b>Injector diameter (Ø)</b>	1.84 mm		1.84 mm		1.74 mm		1.59 mm	
<b>Country of destination (Country code)</b>	GB, BE, CY, CZ, FR, GR, IE, IT, LV, LT, LU, PT, SK, SI, ES, CH		AL, BE, BG, CY, H, R, DK, EE, FI, FR, HU, IS, IT, LT, LU, MT, MK, NL, NO, RO, SK, SI, S, E, TR		PL		AT, DE, SK, CH	
<b>Gas pressure regulator</b>	Certified according to EN 12864 (flow rate: max. 1.5 kg / h)							
<b>Gas hose</b>	Hose certified according to EN standard (max. 3.0 m)							
<b>Primary air regulation</b>	Fixed - not customisable							
<b>Device weight</b>	50 kg							
<b>Gas bottle</b>	Standard gas bottle (5 kg recommended)							

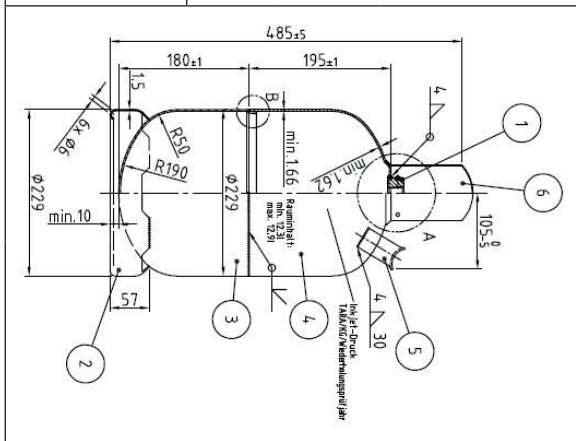

CE

2575-21

PIN no. 2575DM28154

**Chal-Tec GmbH**  
 Wallstraße 16  
 10179 Berlin  
 Germany