


MODEL NUMBER:

□ **7010.201 Centerset Lavatory with Pull-Out Spout**

Metal Speed Connect® pop-up drain.
Metal lever handles.

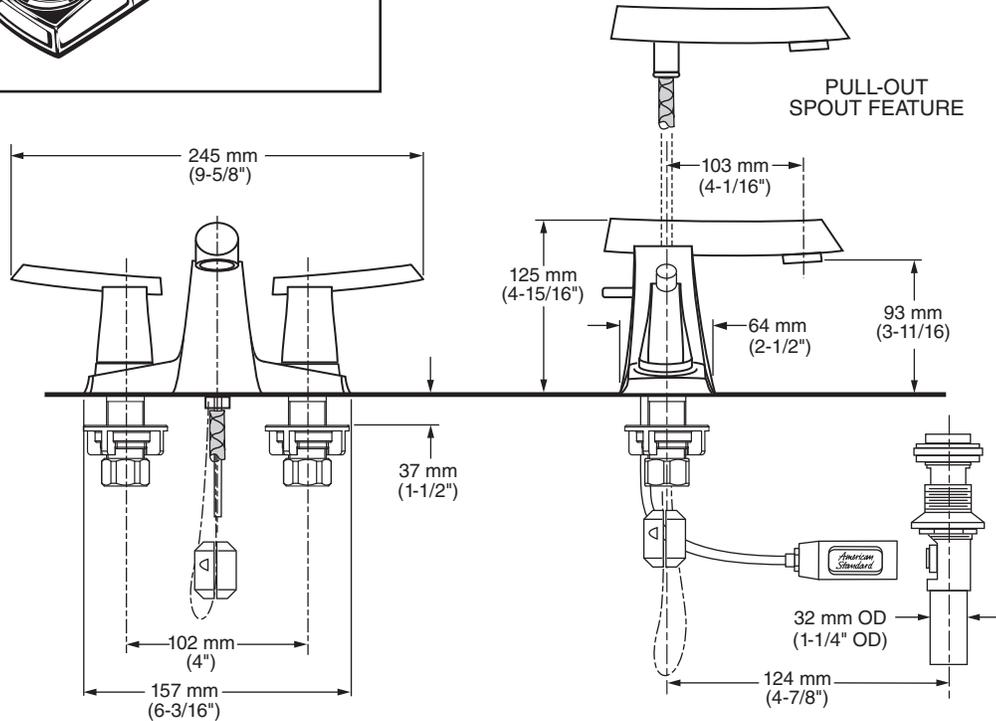

GENERAL DESCRIPTION:

Centerset lavatory faucet on 4" centers. 1/4 turn washerless ceramic disc valve cartridges. Durable cast brass valve bodies with one-half inch male inlet shanks. Metal body. Brass pull-out spray spout (can be locked to spout base if desired). Hose is 1250 mm (4') long with 625 mm (2') reach. Complete with two integral check valves. Metal lever handles. 20 inch (500 mm) long flexible stainless steel drain cable is pre-assembled to faucet body. Metal Speed Connect® drain body with 1-1/4 inch (32 mm) tail piece. 1.2 gpm/4.5 L/min. maximum flow rate.

PRODUCT FEATURES:

- Ceramic Disc Valve Cartridge:** Assures a lifetime of drip-free performance.
- Cast Brass Valve Bodies:** Durable. Ideal for prolonged contact with water.
- Lead Free:** Faucet contains ≤ 0.25% total lead content by weighted average.
- Integral Check Valves:** Prevent backflow
- Exclusive Speed Connect Metal Drain:**
 - Fewer parts. Installs in less time.
 - No adjustments required - seals the first time, every time.
 - Flexible stainless steel cable - installs effortlessly in tight spaces.

SUGGESTED SPECIFICATION

Two-handle 4" centerset lavatory faucet shall feature a pull-out spout with two check valves and cast brass valve bodies. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Shall also feature a metal drain body with stainless steel cable actuation. Fitting shall be American Standard Model # 7010.201._____.




GREEN TEA®
TWO-HANDLE CENTERSET LAVATORY FAUCET
WITH PULL-OUT SPOUT

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

- ANSI A117.1**
- ASME A112.18.1**
- CSA B125.1**
- NSF 61/Section 9 and Annex G**

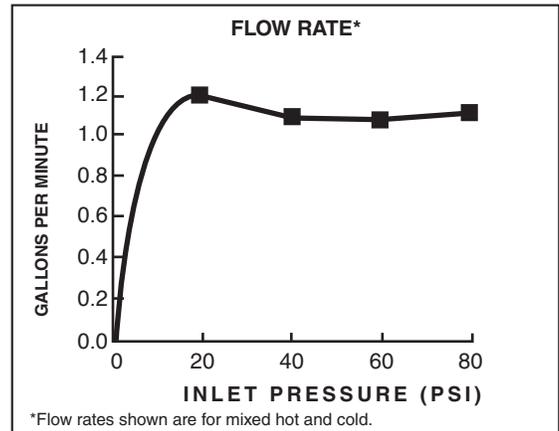

Product Number	Description		Finish Options	
			Polished Chrome	PVD Stainless Steel
			002	075
7010.201	Lavatory faucet with Metal Speed Connect® pop-up drain. Metal lever handles.			

Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.

AERATOR MODIFICATIONS***	Parts Suffix**
1.0 gpm (3.8 Lpm) PCA Aerator	___F10

*PCA — Pressure Compensating
 To modify a product, add suffix after the 4th digit (ex. 2064F05**101.002)
 ***Modified product models are **NOT** WaterSense certified.