


460LF Series **Arrow-Breaker**[®] Frost-Proof Wall Hydrants

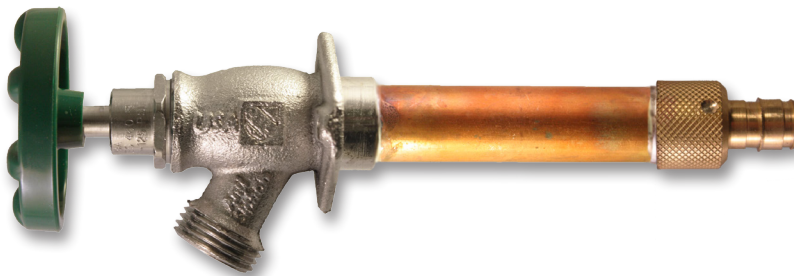

Lead Free Wall Hydrants

With **Arrow-Breaker**[®] Built-In Anti-Siphon Vacuum Breaker

Features & Benefits

- Heavy duty lead free bronze construction
- NSF/ANSI 372 certified lead free by IAPMO
- **Arrow-Breaker**[®] built-in anti-siphon vacuum breaker provides protection against back flow & relieves back pressure per ASSE 1019-A
- Back-flow & pressure evacuates out of the weep hole by the handle
- QuickTurn[®] style operation: easy on-off operation without letting go of the handle
- Orange tag for easy identification by inspectors
- Maximum pressure: 125 PSI
- Maximum temperature: 140° F
- Flow rates: 15 GPM at 50 PSI
- 3-year limited warranty
- Available in loose-key models
- Available in 2, 4, 6, 8, 10, 12 & 14 inch lengths
- Per ASSE 1019 plumbing code, do not leave hydrant pressurized (turned on) for over 12 hours at a time



Base Models & Options

461 Series- 3/4" WIRSBO Inlet  # 461-xxQTLF 3/4" WIRSBO style tube inlet x 3/4" hose thread outlet	462 Series- 1/2" WIRSBO Inlet  # 462-xxQTLF 1/2" WIRSBO style tube inlet x 3/4" hose thread outlet	465 Series- 1/2" FIP 3/4" MIP Inlets  # 465-xxQTLF 1/2" FIP & 3/4" MIP inlets x 3/4" hose thread outlet	466 Series- 1/2" MIP & Sweat Inlets  # 466-xxQTLF 1/2" MIP & copper sweat inlet x 3/4" hose thread outlet	467 Series- 3/4" PEX Inlet  # 467-xxQTLF 3/4" PEX style tube inlet x 3/4" hose thread outlet	468 Series- 3/4" MIP & Sweat Inlets  # 468-xxQTLF 3/4" MIP & copper sweat inlet x 3/4" hose thread outlet
469 Series- 1/2" PEX Inlet  # 469-xxQTLF 1/2" PEX style tube inlet x 3/4" hose thread outlet	Loose Key Option  # 46-xxLKLF Removable loose key lock-shield				

Repair & Replacement Parts

Replacement Oval Handle & Screw  # PK1295 Replacement rubber-coated green oval handle (# 2) & stainless steel screw (# 1)	Spring-less Check Assembly  # PK6026 Replacement spring-less check assembly (# 6)
Complete Stem Assembly  # PK60xx 04, 06, 08, 10, 12, 14 - inch stem assembly (# 3-6)	

