









Environmental Product Declaration

In accordance with ISO 14025 and EN 15804:2012+A2:2019 for:

Touchless washbasin faucet

from

Oras Group

Programme:

Programme operator:

EPD registration number:

Publication date:

Valid until:

The International EPD® System, www.environdec.com

EPD International AB

S-P-06394

2022-06-29

2027-06-29

An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at www.environdec.com









General information

Programme information											
Programme	The International EPD® System										
Address	EPD International AB Box 210 60 SE-100 31 Stockholm Sweden										
Website	www.environdec.com										
E-mail	info@environdec.com										

Accountabilities for PCR,	LCA and independent, third-party verification									
Product Category Rules (PCR)	CEN standard EN 15804 serves as the Core Product Category Rules (PCR) Product Category Rules (PCR): Construction products, 2019:14, version 1.11, UN CPC 42911 - Sinks, washbasins, baths and other sanitary ware and parts thereof, of iron, steel, copper or aluminium. PCR review was conducted by: The Technical Committee of the International EPD® System. Chair of the PCR review: Claudia A. Peña. The review panel may be contacted via info@environdec.com.									
Life Cycle Assessment (LCA)	LCA accountability: Aleksi Laurila, Environmental consultant. Organization: Ecobio Oy.									
Third-party verification	Independent third-party verification of the declaration and data, according to ISO 14025:2006, via: ☑ EPD verification by individual verifier Third-party verifier: Hannu Karppi, Ramboll Finland Oy Approved by: The International EPD® System									
Procedure for follow-up of data during	EPD validity involves third party verifier: ☐ Yes ☒ No									


The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but from different programmes may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804. For further information about comparability, see EN 15804 and ISO 14025.







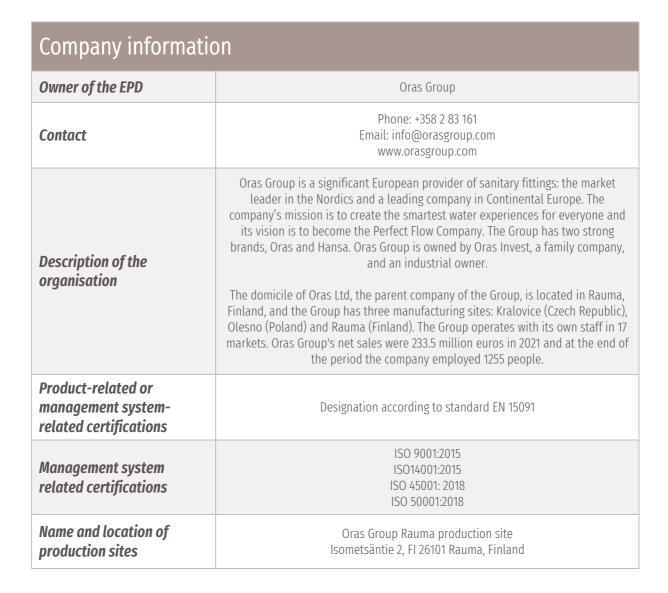

Product information											
Product name	Touchless washbasin faucet										
Product identification	Touchless faucet for wash basin, horizontal mounted, single hole, according to EN 15091										
Product description	Oras Group products are manufactured in our own European factories by focusing into sustainable energy sources, highly efficient processes and minimized material usage and waste. Faucets include built-in features for water flow and temperature limitation to ensure sustainable product life cycle with efficient use of energy.										
UN CPC code	42911 - Sinks, washbasins, baths and other sanitary ware and parts thereof, of iron, steel, copper or aluminium										
Geographical scope	Europe										









LCA information	
Functional unit / declared unit	1 kg of Touchless washbasin faucet
Reference service life	The reference service life for electronic washbasin faucet is 16 years. The technical service life for electronic washbasin faucet is 25 years.
Time representativeness	The data was collected covering production year 2020, which is considered to represent average production year for electronic washbasin faucets. The material declarations used as a basis for modelling the raw material supply are compiled in 2022.
Databases and LCA software	Ecoinvent 3.8 and SimaPro (Version 9.3.0.3).
Description of system boundaries	Cradle to gate with options, modules C1–C4, module D and with optional modules (A1–A3 + C + D and additional modules). The additional modules are A4 and B7.










System diagram

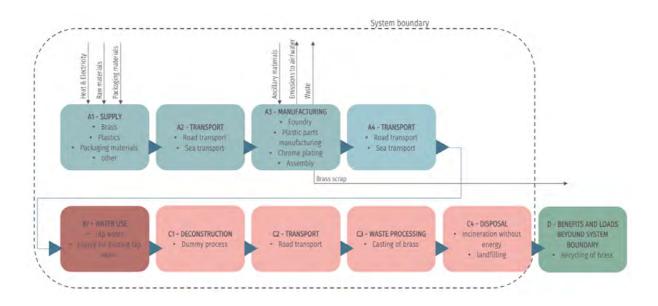

'EPD®

LCA practitioner	Ecobio Oy, www.ecobio.fi
Allocation	Co-product allocation was applied for the brass scrap that is produced from the foundry process. Economic co-product allocation was applied based on the hierarchy presented for co-product allocation on the EN 15804:2012+A2:2019.
Electricity used in module A3	The electricity used in module A3 accounts for more than 30 % of the total energy consumption in modules A1-A3. Therefore, the used energy sources for electricity production and climate change impact of the electricity mix are stated. At Rauma production site the electricity is 100 % based on hydropower. GWP-GHG impact of the used electricity mix is 5,4 g CO ₂ -eq/kWh.
Information about scenarios and additional technical information	The scenario for operational water use is described on chapter "Additional Information".







Modules declared

Geographical scope, share of specific data (in GWP-GHG indicator) and data variation:

	Pro	oduct sta	age		ruction s stage	Use stage								End of life stage			
	Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
Module	A1	A2	A3	A4	A5	B1	В2	В3	В4	B 5	В6	В7	C1	C2	С3	C4	D
Modules declared	Х	Х	Х	Х	MND	MND	MND	MND	MND	MND	MND	Х	Х	Х	Х	Х	Х
Geography																EU27	EU27
Specific data used	> 90 %					-	-	-	-	-	-	-	-	-	-	-	-
Variation – products	< 10 %					-	-	-	-	-	-	-	-	-	-	-	-
Variation – sites		Only or	ne product	tion site		-	-	-	-	-	-	-	-	-	-	-	-









LCA Modules	
A1 Raw material supply	C1 De-construction
This module contains the supply of raw materials including brass, stainless steel, plastics, rubbers and other materials in smaller quantities.	This module is assumed to not cause environmental impacts as the de-construction of faucet product can be done with manual labour and does not require external energy sources.
A2 Transportation	C2 Transport
This module contains the transportation of raw materials and prefabricated components from suppliers to Oras Group's production facilities. Average transportation route covering all the relevant raw materials was developed as there is wide range of possible supply locations even for single raw materials and components. Transportation takes place by road and sea.	This module contains the transportation of product for waste processing to nearest waste processing facility. Transportation is done by road and the distance is assumed to be 50 km.
A3 Manufacturing	C3 Waste processing
This module contains the relevant production processes for electronic washbasin faucets. The most relevant processes are casting in foundry, production of plastic parts and chrome-plating of brass and plastic parts. Treatment of waste and wastewater are also included. The used electricity mix for manufacturing stage is stated on chapter "LCA Information".	This module contains the waste processing related to material recycling of brass. It is assumed that 90 % of the brass is headed for material recycling process, which includes casting of brass into brass ingots.
A4 Transport	C4 Disposal
This module contains the transportation of the final product to warehouses from where further distribution takes place. The scenario does not included transportation to construction site.	This module contains final disposal of materials that are not headed for material or energy recovery. Stainless steel, plastic components, rubber components, packaging materials of the final product and 10 % of brass are assumed to be headed for incineration without energy recovery. Other components in smaller quantities are assumed to be headed to landfill.
B7 Operational water use	D Benefits and loads beyond system boundary
This module contains the production, heating and wastewater treatment of tap water related to the use of electronic washbasin faucet. The scenario for operational water use is described more precisely on chapter "Additional Information".	This module contains the benefits related to material recycling of brass. Brass is recycled through casting process, and it is assumed to substitute virgin brass production from the market









Content information

Product components	Weight, kg	Post-consumer material, weight-%	Renewable material, weight-%
Acrylonitrile butadiene styrene	0,0019	0 %	0 %
Aluminium oxide	0,0019	0 %	0 %
Brass	0,8390	0 %	0 %
Chromium	0,0001	0 %	0 %
Cobalt, Gold, Iron, Mangan, Palladium, Phosphorus, Silicon, Silver, Tin, Zinc	< 0,0001	0 %	0 %
Copper	0,0024	0 %	0 %
Ethylene propylene diene monomer	0,0042	0 %	0 %
Fused silica	< 0,0001	0 %	0 %
Neodymium Iron Boron	0,0002	0 %	0 %
Nickel	0,0002	0 %	0 %
Other	0,0303	0 %	0 %
Polycarbonate	0,0005	0 %	0 %
Polyoxymethylene	0,0181	0 %	0 %
Polypropylene	0,0028	0 %	0 %
Polyphenylsulfone	0,0012	0 %	0 %
Polysulfone	0,0035	0 %	0 %
Polyvinyl chloride	0,0047	0 %	0 %
Silicone	0,0002	0 %	0 %
Softpex	0,0293	0 %	0 %
Stainless steel	0,0582	0 %	0 %
Thermoplastic elastomer	0,0014	0 %	0 %
Thermoplastic polyurethane	0,0019	0 %	0 %
TOTAL	1,0000	0 %	0 %
Packaging materials	Weight, kg	Weight-% (versus the produc	ct)
Corrugated board	0,0838	8,38 %	
Fibre based covering, paper fibre	0,0286	2,86 %	
Linear low-density polyethylene	0,0018	0,18 %	
Polyamide	0,0009	0,09 %	
Paper	0,0200	2,00 %	
Sharp tear	0,0001	0,01 %	
TOTAL	0,1353	13,53 %	

The electronic washbasin faucets do not contain substances which exceed the limits for registration with the European Chemicals Agency regarding the "Candidate List of Substances of Very High Concern for authorization".









Environmental Information

Potential environmental impact – mandatory indicators according to EN 15804

			F	Results pe	er 1 kg of E	Electronic	washbas	in faucet				
Indicator	Unit	A1	A2	A3	Tot. A1-A3	A4	В7	C1	C2	<i>C</i> 3	C4	D
GWP-fossil	kg CO2 eq.	5,45E+00	2,48E-01	2,93E-01	5,99E+00	2,19E-01	4,30E+02	0,00E+00	1,07E-02	1,26E-02	1,66E-01	-4,37E+00
GWP- biogenic	kg CO2 eq.	6,86E-02	5,15E-04	3,78E-02	1,07E-01	4,26E-04	1,30E+02	0,00E+00	3,35E-05	1,66E-03	2,14E-01	-4,93E-02
GWP- luluc	kg CO2 eq.	1,11E-02	1,16E-04	8,39E-04	1,21E-02	1,03E-04	4,16E-01	0,00E+00	5,04E-06	3,99E-06	7,05E-06	-9,67E-03
GWP- total	kg CO2 eq.	5,53E+00	2,48E-01	3,32E-01	6,11E+00	2,20E-01	5,61E+02	0,00E+00	1,08E-02	1,43E-02	3,81E-01	-4,43E+00
ODP	kg CFC 11 eq.	3,09E-07	5,53E-08	2,72E-08	3,92E-07	4,87E-08	4,40E-05	0,00E+00	2,41E-09	1,54E-09	2,43E-09	-2,47E-07
AP	mol H+ eq.	3,55E-01	2,56E-03	1,02E-03	3,59E-01	2,74E-03	2,10E+00	0,00E+00	4,26E-05	2,96E-05	1,23E-04	-3,17E-01
EP- freshwater	kg PO43- eq.	2,82E-02	1,44E-05	1,26E-04	2,83E-02	1,19E-05	2,75E-01	0,00E+00	8,05E-07	2,47E-06	2,84E-06	-2,53E-02
EP- freshwater	kg P eq.	1,04E-02	5,31E-06	4,67E-05	1,05E-02	4,41E-06	1,02E-01	0,00E+00	2,98E-07	9,15E-07	1,05E-06	-9,36E-03
EP- marine	kg N eq.	1,86E-02	6,74E-04	3,77E-04	1,96E-02	7,17E-04	2,77E+00	0,00E+00	1,24E-05	8,36E-06	6,79E-05	-1,63E-02
EP- terrestrial	mol N eq.	2,53E-01	7,44E-03	3,01E-03	2,64E-01	7,94E-03	4,49E+00	0,00E+00	1,35E-04	9,79E-05	5,80E-04	-2,24E-01
POCP	kg NMVOC eq.	6,31E-02	1,82E-03	6,75E-04	6,56E-02	1,94E-03	9,37E-01	0,00E+00	3,36E-05	2,31E-05	1,32E-04	-5,56E-02
ADP- minerals& metals*	kg Sb eq.	8,78E-03	7,44E-07	1,08E-06	8,78E-03	6,18E-07	1,91E-03	0,00E+00	4,88E-08	5,69E-08	5,55E-08	-7,89E-03
ADP- fossil*	MJ	7,01E+01	3,61E+00	2,63E+00	7,64E+01	3,17E+00	6,64E+03	0,00E+00	1,60E-01	1,98E-01	9,66E-02	-5,44E+01
WDP	m3	6,68E+00	9,62E-03	7,06E-02	6,76E+00	7,95E-03	4,89E+02	0,00E+00	5,13E-04	9,37E-04	2,66E-03	-5,47E+00

Acronyms

GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption

^{*} Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.







Potential environmental impact – additional mandatory and voluntary indicators

	Results per 1 kg of Electronic washbasin faucet												
Indicator	Unit	A1	A2	A3	Tot. A1-A3	A4	В7	C1	C2	C3	C4	D	
GWP-GHG1	kg CO2 eq.	5,36E+00	2,46E-01	3,00E-01	5,91E+00	2,18E-01	4,25E+02	0,00E+00	1,06E-02	1,24E-02	1,69E-01	- 4,30E+00	

Use of resources

			F	Results pe	r 1 kg of E	Electronic	washbas	in faucet				
Indicator	Unit	A1	A2	А3	Tot. A1-A3	A4	В7	C1	C2	C3	C4	D
PERE	MJ	1,68E+01	4,52E-02	5,65E+00	2,25E+01	3,82E-02	1,25E+03	0,00E+00	2,70E-03	5,24E-02	6,36E-03	-1,43E+01
PERM	MJ	0	0	0	0	0	0	0	0	0	0	0
PERT	MJ	1,68E+01	4,52E-02	5,65E+00	2,25E+01	3,82E-02	1,25E+03	0,00E+00	2,70E-03	5,24E-02	6,36E-03	-1,43E+01
PENRE	MJ	8,64E+01	3,63E+00	2,87E+00	9,29E+01	3,18E+00	7,65E+03	0,00E+00	1,62E-01	2,19E-01	1,13E-01	-6,86E+01
PENRM	MJ.	0	0	0	0	0	0	0	0	0	0	0
PENRT	MJ	8,64E+01	3,63E+00	2,87E+00	9,29E+01	3,18E+00	7,65E+03	0,00E+00	1,62E-01	2,19E-01	1,13E-01	-6,86E+01
SM	kg	0	0	0	0	0	0	0	0	0	0	0
RSF	MJ	0	0	0	0	0	0	0	0	0	0	0
NRSF	MJ	0	0	0	0	0	0	0	0	0	0	0
FW	m3	1,56E-01	3,38E-04	2,10E-02	1,78E-01	2,83E-04	1,32E+01	0,00E+00	1,90E-05	1,80E-04	1,87E-04	-1,28E-01

Acronyms

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water

¹ The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus almost equal to the GWP indicator originally defined in EN 15804:2012+A1:2013.









Waste production and output flows

Waste production

	Results per 1 kg of Electronic washbasin faucet														
Indicator	Unit	A1	A2	A3	Tot. A1-A3	A4	В7	C1	C2	C3	C4	D			
Hazardous waste disposed	kg	2,17E-02	8,25E-06	7,06E-05	2,17E-02	6,86E-06	2,46E-02	0,00E+00	4,29E-07	2,52E-07	2,64E-07	-2,22E-03			
Non- hazardous waste disposed	kg	2,21E+00	1,51E-01	6,60E-02	2,43E+00	1,22E-01	8,64E+01	0,00E+00	6,78E-03	1,63E-02	9,38E-03	-1,71E+00			
Radioactive waste disposed	kg	2,35E-04	2,45E-05	9,17E-06	2,68E-04	2,16E-05	2,96E-02	0,00E+00	1,07E-06	8,58E-07	3,87E-07	-2,01E-04			

Output flows

Results per 1 kg of Electronic washbasin faucet												
Indicator	Unit	A1	A2	A3	Tot. A1-A3	A4	В7	C1	C2	<i>C</i> 3	C4	D
Components for re-use	kg	0	0	0	0	0	0	0	0	0	0	0
Material for recycling	kg	0	0	0,02	0,02	0	0	0	0	0,77	0	0
Materials for energy recovery	kg	0	0	0	0	0	0	0	0	0	0	0
Exported energy, electricity	MJ	0	0	0	0	0	0	0	0	0	0	0
Exported energy, thermal	MJ	0	0	0	0	0	0	0	0	0	0	0

Information on biogenic carbon content

Results per 1 kg of Electronic washbasin faucet				
BIOGENIC CARBON CONTENT	Unit	QUANTITY		
Biogenic carbon content in product	kg C	0,0000		
Biogenic carbon content in packaging	kg C	0,0662		

Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO₂.









Additional information

The scenario for module B7 "Operational water use" is based on Unified Water Label (UWL), which is a product label developed by European bathroom industry to demonstrate water and energy efficiency of bathroom products. The technical criteria of UWL correlates with existing European and National standards while establishing harmonised calculation criteria for bathroom products. The following parameters were applied when developing the scenario related to operational water use.

Parameter	Amount	Unit
Reference flow	6	l/min
Use cycles per day	7	use cycles/day
Length of use cycle	1	min
Use cycles per year	365	days
Cold water temperature	15	0C
Hot water temperature	38	0C
Heat coefficient of water	4,18	kJ/kgK
Density of water	0,981	kg/l
Length of the use stage	16	years

The annual water consumption according to the parameters stated above is 15 330 l. However, according to the UWL methodology the annual water consumption can be divided by two for electronic washbasin faucets. This means that the annual water consumption is 7 665 l. It is assumed that 40 % of the water consumption for electronic washbasin faucet is hot water. This means that 3 066 l of water is heated annually. 80,32 kWh of energy is consumed annually for the heating of water. The scenario for operational water use covers 16 years which is the reference service life of electronic washbasin faucets. The energy profile for heating of water is based on Eurostat statistics describing disaggregated final energy consumption in households used for water heating in year 2018. The geographical coverage of the data is Europe (EU27). The following values were applied when modelling the energy profile for heating of domestic water.

Source of energy	Amount	Unit
Solid fossil fuels and peat	1,21	%
Natural gas	32,89	%
Liquefied natural gas	2,48	%
Oil and petroleum products	9,15	%
Other kerosene	0,42	%
Gas oil and diesel oil	6,25	%
Renewables and biofuels	10,54	%
Solar thermal	4,03	%
Ambient heat (heat pumps)	1,06	%
Primary solid biofuels	5,34	%
Biogases	0,09	%
Electricity	16,23	%
District heat	10,31	%
Total	100,00	%









Operational water use scenario

The scenario for operational water use covers the water and energy consumption related to use of electronic washbasin faucet by one person for 16 years according to the calculation parameters described in UWL methodology. The scenario presented in this EPD is an estimation of the potential environmental impacts related to the use stage of faucet product and the scenario aims to emphasize the significance of the use stage in relation to the products life cycle. In reality, the environmental impacts arising from the use stage of the product are very dependent on behavior of the user, nominal flow of the faucet product and energy sources used for heating of domestic water.

Differences versus previous versions

2024-07-01 Included product list. 2024-10-01 Updated product list. 2025-01-13 Included product list.

References

Disaggregated final energy consumption in households – Energy use – Water heating. Eurostat. 2022. Ecobio LCA report – Faucet products. Oras Group. 2022. General Programme Instructions of the International EPD® System. Version 3.01. MEErP Preparatory Study on Taps and Showers. European Comission. 2014. PCR 2019:14. Construction products. Version 1.11.

Taps & showers technical criteria. Unified Water Label. 2020.







6250FZ

Washbasin faucet



Included products

ŀ	IICluded	products		
Γ				
	6172	Washbasin faucet	4814FZ-104	Washbasin faucet
	6120FZ	Washbasin faucet	92512009	Washbasin faucet
	93602009	Washbasin faucet	6150FZ-105	Washbasin faucet
	9360FZ	Washbasin faucet	9282BFZ	Washbasin faucet
	93631129	Washbasin faucet, low pressure	6150FZ-102	Washbasin faucet
	93602219	Washbasin faucet	5521F	Washbasin faucet, 9/12 V, Bluetooth
	92602009	Washbasin faucet	4816FZ	Washbasin faucet, 3 V, Bluetooth
	9270FZ	Washbasin faucet	4826FTZ	Washbasin faucet, 230/9 V, Bluetooth
	64442219	Washbasin faucet	4816FZ-105	Washbasin faucet, 3 V, Bluetooth
	6150FZ	Washbasin faucet	4816FZ-104	Washbasin faucet, 3 V, Bluetooth
	92512219	Washbasin faucet	9267FZ	Washbasin faucet, 3 V, Bluetooth
	92031129	Washbasin faucet, low pressure	08866202	Washbasin faucet, 6 V, Bluetooth
	1714FZ	Washbasin faucet	6179	Washbasin faucet, 6 V
	9362FZ	Washbasin faucet	5676Z	Washbasin faucet, 6 V, Bluetooth
	64162009	Washbasin faucet	08866201	Washbasin faucet, 6 V, Bluetooth
	9382BFZ	Washbasin faucet	9262FQ	Washbasin faucet, 3 V, non-Bluetooth
	6150F	Washbasin faucet	6401Z	Washbasin faucet, 24/48 V, Bluetooth
	6120FTZ	Washbasin faucet	6104Z	Washbasin faucet, 24/48 V, Bluetooth
	9280BFZ	Washbasin faucet	6105Z	Washbasin faucet, 24/48 V, Bluetooth
	3017F	High washbasin faucet	6114Z	Washbasin faucet, 24/48 V, Bluetooth
	92631129	Washbasin faucet, low pressure	6205Z	Washbasin faucet, 24/48 V, Bluetooth
	4824FTZ	Washbasin faucet	6205MZ	Washbasin faucet, 24/48 V, Bluetooth
	92702219	Washbasin faucet	6100Z	Washbasin faucet, 24/48 V, Bluetooth
	93702009	Washbasin faucet	6204Z	Washbasin faucet, 24/48 V, Bluetooth
	6331FZ	Washbasin faucet	6110Z	Washbasin faucet, 24/48 V, Bluetooth
	6333FZ	Washbasin faucet	6215Z	Washbasin faucet, 24/48 V, Bluetooth
	51932211	Washbasin faucet	6104Q	Washbasin faucet, 24/48 V, non-Bluetooth
	51932201	Washbasin faucet	6105Q	Washbasin faucet, 24/48 V, non-Bluetooth
	1714F	Washbasin faucet	6215Q	Washbasin faucet, 24/48 V, non-Bluetooth
	6151FZ	Washbasin faucet	6114Q	Washbasin faucet, 24/48 V, non-Bluetooth
	9260FZ	Washbasin faucet	01110	vasiibasiii laacet, 21, 10 v, non Blaccoolii
	6151FZ-104	Washbasin faucet		
	92602219	Washbasin faucet		
	6151FZ-105	Washbasin faucet		
	64162219	Washbasin faucet		
	6150FZ-104	Washbasin faucet		
	5550F	Washbasin faucet		
	05672029	Washbasin faucet		
	9370FZ	Washbasin faucet		
	92702009	Washbasin faucet		
	93702219	Washbasin faucet		
	92731129	Washbasin faucet, low pressure		
	64442229	Washbasin faucet Washbasin faucet		
	6334FTZ	Washbasin faucet		
	571622790004	Washbasin faucet		
	6153FZ	Washbasin faucet		
		Washbasin faucet		
	4814FZ-105 5523F	High washbasin faucet		
	571622790005	Washbasin faucet		
	9262FZ	Washbasin faucet		
	05672019	Washbasin faucet		
	9380BFZ	Washbasin faucet		
	6330FZ	Washbasin faucet		
	6332FZ	Washbasin faucet		
	6335FTZ	Washbasin faucet		
	57162279	Washbasin faucet		
	57122279	Washbasin faucet		
1	625057	Washbasin fauset		