

Maximum reliability. Minimum fuss.



Technical Data Sheet


Specialist rivets

Fastener Systems



Application

- + Sheeting & Cladding
- + Facade and rainscreen
- + General construction

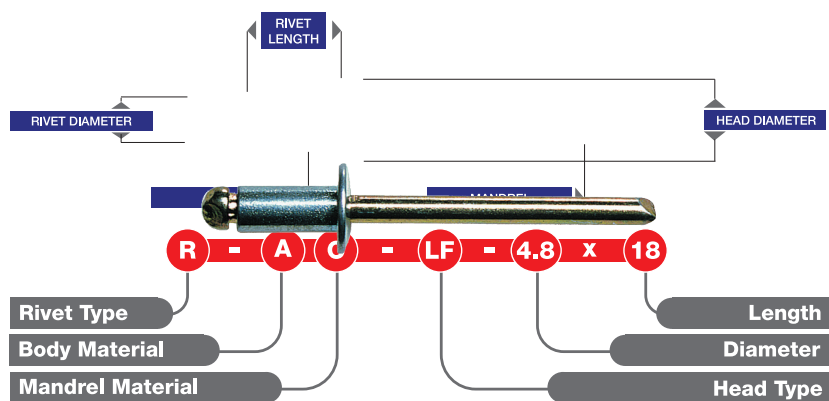

Code	Body dia. (mm)	Drill size (mm)	Head dia. (mm)	Rivet length (mm)	Mandrel dia. (mm)	Grip range min-max (mm)	Shear (N)	Tensile (N)
R-CC-3.2 x 6	3.2	3.3	6.5	6.0	2.0	1.5 - 3.5	1060	1285
R-CC-4.8 x 10	4.8	4.9	9.5	10.0	2.9	3.5 - 5.5	2305	2920



Lacquered rivets

Code	Body dia. (mm)	Drill size (mm)	Head dia. (mm)	Rivet length (mm)	Mandrel dia. (mm)	Grip range min-max (mm)	Shear (N)	Tensile (N)
R-CC-LAC-4.8 x 10	4.8	4.9	9.5	10.0	2.9	3.5 - 5.5	2305	2920



Countersunk rivets

Code	Body dia. (mm)	Drill size (mm)	Head dia. (mm)	Rivet length (mm)	Mandrel dia. (mm)	Grip range max-max (mm)	Shear (N)	Tensile (N)
R-CC-CSK-4.8 x 8	4.8	4.9	9.0	8.0	2.9	1.0 - 4.0	3000	2400
R-AC-CSK-4.8 x 12				12.0	2.7	6.0 - 8.0	1520	2230





Merlin House
Seven Mile Lane
Borough Green
Sevenoaks
Kent
TN15 8QY

Enquiries

0800 304 7616

International

+44 (0) 1732 882387

Fax

0845 450 7486

Email

info@fixfast.com



Certificate number 10905
ISO 9001, ISO 14001
ISO 45001