

## FarBo<sup>®</sup> FO-FLEX rainwater outlets

FloDrain rainwater outlets with extra flexible flange for roof drainage systems.

FO-FLEX Outlet is used where it is not possible to use our standard FO-FLO Outlet due to a parapet wall or other obstruction. The flexible flange assures that the integrated membrane can be shaped to fit the roof's inclination and form.

### Applications

- Rainwater outlets for flat roof refurbishment and new build projects

### Key Features

- High quality 400mm long spigot manufactured from stainless steel
- Flexible factory bonded membrane flange
- Membrane attached to the outlet allows for easy installation
- Flush finish - minimal risk of ponding
- O-ring seal supplied for refurbishment application - provides excellent seal whilst still allowing for movement
- 600mm and 1000mm spigots are available to order - please enquire


## Datasheet

Document Reference: PO-RDS-FLO-11.25/03

03 ROOF DRAINAGE SYSTEMS  
FarBo<sup>®</sup> Flex  
rainwater outlets

## FarBo® FO-FLEX rainwater outlets

Code	Outlet diameter (mm)	To suit pipe size (mm) - refurbishment applications	O ring seal diameter (mm)	Membrane attachment	
				Type	Size (mm)
FO-FLEX-50-SBS	50	58-64	8	Bituminous	330 x 330
FO-FLEX-62-SBS	62	70-76	8	Bituminous	330 x 330
FO-FLEX-75-SBS	75	82-97	8/12	Bituminous	330 x 330
FO-FLEX-90-SBS	90	98-108	10	Bituminous	330 x 330
FO-FLEX-110-SBS	110	120-128	10	Bituminous	330 x 330
FO-FLEX-50-PVC DK GREY	50	58-64	8	PVC	350 x 350
FO-FLEX-62-PVC DK GREY	62	70-76	8	PVC	350 x 350
FO-FLEX-75-PVC DK GREY	75	82-97	8/12	PVC	350 x 350
FO-FLEX-90-PVC DK GREY	90	98-108	10	PVC	350 x 350
FO-FLEX-110-PVC DK GREY	110	120-128	10	PVC	400 x 400
FO-FLEX-50-PVC LT GREY	50	58-64	8	PVC	350 x 350
FO-FLEX-62-PVC LT GREY	62	70-76	8	PVC	350 x 350
FO-FLEX-75-PVC LT GREY	75	82-97	8/12	PVC	350 x 350
FO-FLEX-90-PVC LT GREY	90	98-108	10	PVC	350 x 350
FO-FLEX-110-PVC LT GREY	110	120-128	10	PVC	400 x 400

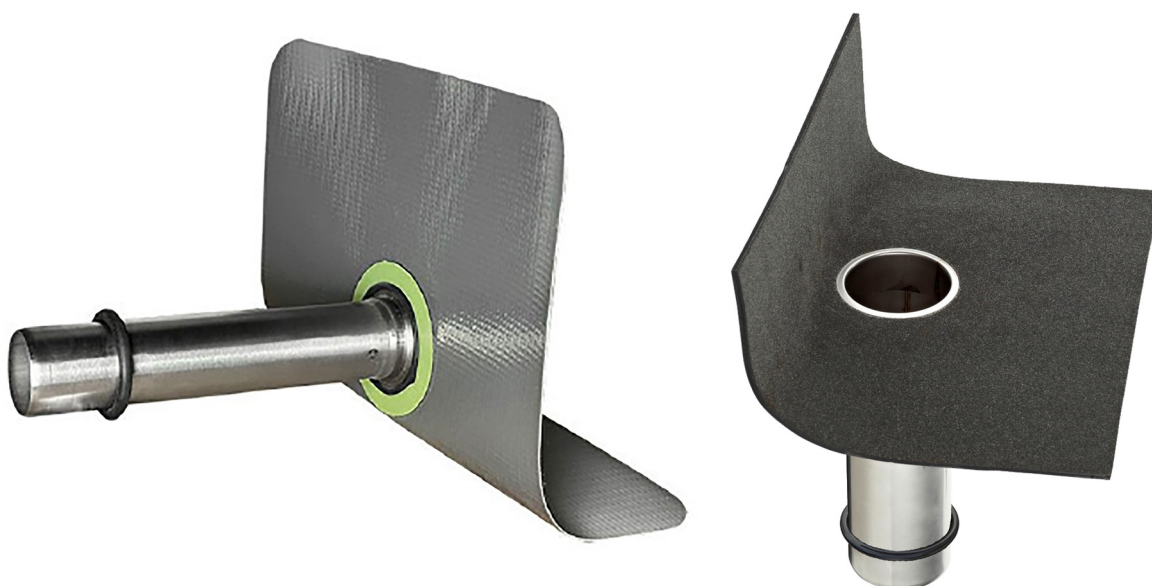

**FIXFAST Ltd | Unit 6 | Frank Sando Way | Aylesford | Kent | ME20 7NY**  
**T: 0845 450 7483 | F: 0845 450 7486 | E: [info@fixfast.com](mailto:info@fixfast.com) | W: [www.fixfast.com](http://www.fixfast.com)**

*Fixfast is a trading name of FIXFAST Ltd which is a company registered in England & Wales with number 09481218.  
The registered office is Fixfast, Unit 6, Frank Sando Way, Aylesford, Kent, United Kingdom, ME20 7NY*

*©Fixfast September 2017. All rights reserved. Due to a policy of continual development, Fixfast reserves the right to change product specification and descriptions without prior notice.*



Certificate Number 10905  
ISO 9001: 2008  
ISO 14001: 2004  
BS OHSAS 18001: 2007