


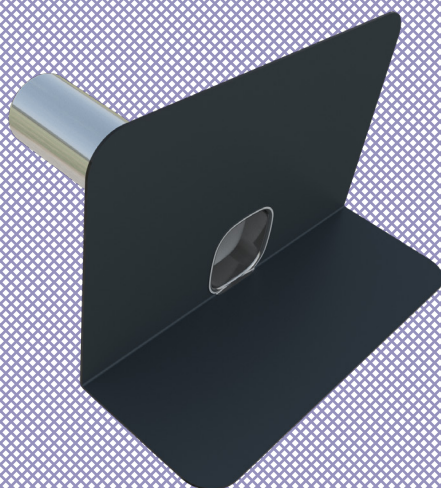

FarBo® ParaDrain rainwater outlets

Parapet rainwater outlets for roof drainage systems

Applications

- Rainwater outlets specifically designed for use in through-wall applications or parapets

Key Features

- 400mm or 600mm long spigot manufactured from stainless steel
- Factory bonded flange to match specific membrane material being used (material must be specified at time of order)
- Membrane attached to the outlet allows for easy installation
- Suitable for use in new build or refurbishment applications

Datasheet

Document Reference: DS-RDS-PARA-6.21/03

03 ROOF DRAINAGE SYSTEMS
FarBo® ParaDrain rainwater
outlets

With 400mm spigot

Code	Flow Rate l/sec	Outlet drain (mm)	Membrane attachment	
			Type	Size (mm)
FO-PARAPET-50-SBS	0.32	50	Bituminous	500 x 500
FO-PARAPET-75-SBS	0.63	75	Bituminous	500 x 500
FO-PARAPET-90-SBS	0.83	90	Bituminous	500 x 500
FO-PARAPET-110-SBS	1.06	110	Bituminous	500 x 500
FO-PARAPET-50-PVC LT GREY	0.32	50	Light grey PVC	350 x 350
FO-PARAPET-75-PVC LT GREY	0.63	75	Light grey PVC	350 x 350
FO-PARAPET-90-PVC LT GREY	0.83	90	Light grey PVC	350 x 350
FO-PARAPET-110-PVC LT GREY	1.06	110	Light grey PVC	350 x 350
FO-PARAPET-50-PVC DK GREY	0.32	50	Dark grey PVC	350 x 350
FO-PARAPET-75-PVC DK GREY	0.63	75	Dark grey PVC	350 x 350
FO-PARAPET-90-PVC DK GREY	0.83	90	Dark grey PVC	350 x 350
FO-PARAPET-110-PVC DK GREY	1.06	110	Dark grey PVC	350 x 350


For TPO, EPDM or other non-standard membranes, please contact our customer service team on 0800 304 7616



FO-PARAPET-SBS



FO-PARAPET-PVC LT GREY

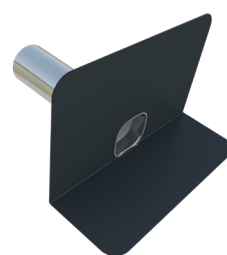

FO-PARAPET-PVC DK GREY

FIXFAST Ltd | Unit 6 | Frank Sando Way | Aylesford | Kent | ME20 7NY
T: 0845 450 4783 | F: 0845 450 7486 | E: info@fixfast.com | W: www.fixfast.com

*Fixfast is a trading name of FIXFAST Ltd which is a company registered in England & Wales with number 09481218.
The registered office is Fixfast Ltd, Unit 6, Frank Sando Way, Aylesford, Kent, ME20 7NY*



Certificate Number 10905
ISO 9001: 2008
ISO 14001: 2004
BS OHSAS 18001: 2007

With 600mm spigot

Code	Flow Rate l/sec	Outlet drain (mm)	Membrane attachment	
			Type	Size (mm)
FO-PARAPET-50/600-SBS	0.32	50	Bituminous	500 x 500
FO-PARAPET-75/600-SBS	0.63	75	Bituminous	500 x 500
FO-PARAPET-90/600-SBS	0.83	90	Bituminous	500 x 500
FO-PARAPET-110/600-SBS	1.06	110	Bituminous	500 x 500
FO-PARAPET-50/600-PVC LT GREY	0.32	50	Light grey PVC	350 x 350
FO-PARAPET-75/600-PVC LT GREY	0.63	75	Light grey PVC	350 x 350
FO-PARAPET-90/600-PVC LT GREY	0.83	90	Light grey PVC	350 x 350
FO-PARAPET-110/600-PVC LT GREY	1.06	110	Light grey PVC	350 x 350
FO-PARAPET-50/600-PVC DK GREY	0.32	50	Dark grey PVC	350 x 350
FO-PARAPET-75/600-PVC DK GREY	0.63	75	Dark grey PVC	350 x 350
FO-PARAPET-90/600-PVC DK GREY	0.83	90	Dark grey PVC	350 x 350
FO-PARAPET-110/600-PVC DK GREY	1.06	110	Dark grey PVC	350 x 350

Outlet flow rates with leafguards are based on a water depth of 35mm above the invert level of the outlet as recommended by UK design standard BS EN 12056-3:2000. If required, greater flow rates can be achieved if the outlets are sumped - please request a rainwater calculation by our technical department

Leafguard for ParaDrain	Description	Outlet drain (mm)
FO-PG-50-225	Stainless steel parapet leafguard prevents blocking of outlet by debris Securely clamps to inside of outlet stem, can only be removed with the correct tool.	50
FO-PG-225	Stainless steel parapet leafguard prevents blocking of outlet by debris Securely clamps to inside of outlet stem, can only be removed with the correct tool. Suits all sizes of ParaDrain outlets	75, 90 and 110



FO-PG

Please note that larger parapets outlets are available

FIXFAST Ltd | Unit 6 | Frank Sando Way | Aylesford | Kent | ME20 7NY
T: 0845 450 4783 | F: 0845 450 7486 | E: info@fixfast.com | W: www.fixfast.com

*Fixfast is a trading name of FIXFAST Ltd which is a company registered in England & Wales with number 09481218.
The registered office is Fixfast Ltd, Unit 6, Frank Sando Way, Aylesford, Kent, ME20 7NY*



Certificate Number 10905
ISO 9001: 2008
ISO 14001: 2004
BS OHSAS 18001: 2007