
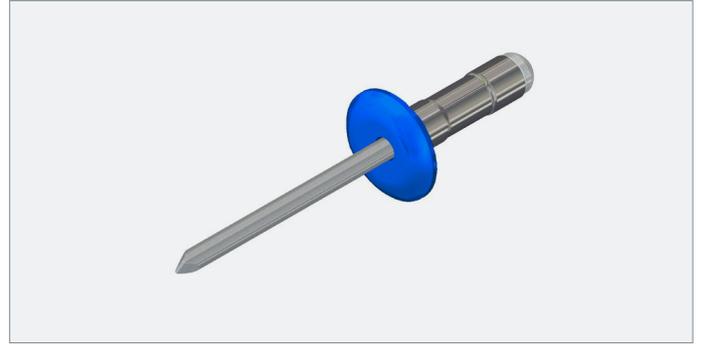


# Multi-range Aluminium/Stainless Large Flange Rivets

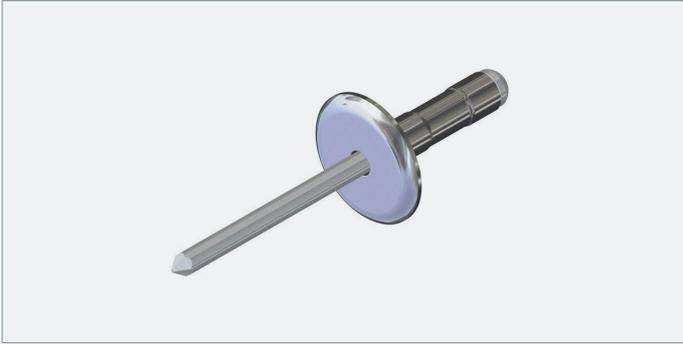


## Application

- Sheeting & Cladding
- Facade and rainscreen
- General construction

## Key Features

- Allows one rivet to fasten various thicknesses
- High grade aluminium with stainless steel mandrel
- Available in a wide range of RAL and BS colours and other panel colour brands
- Large flange domed head for greater bearing strength

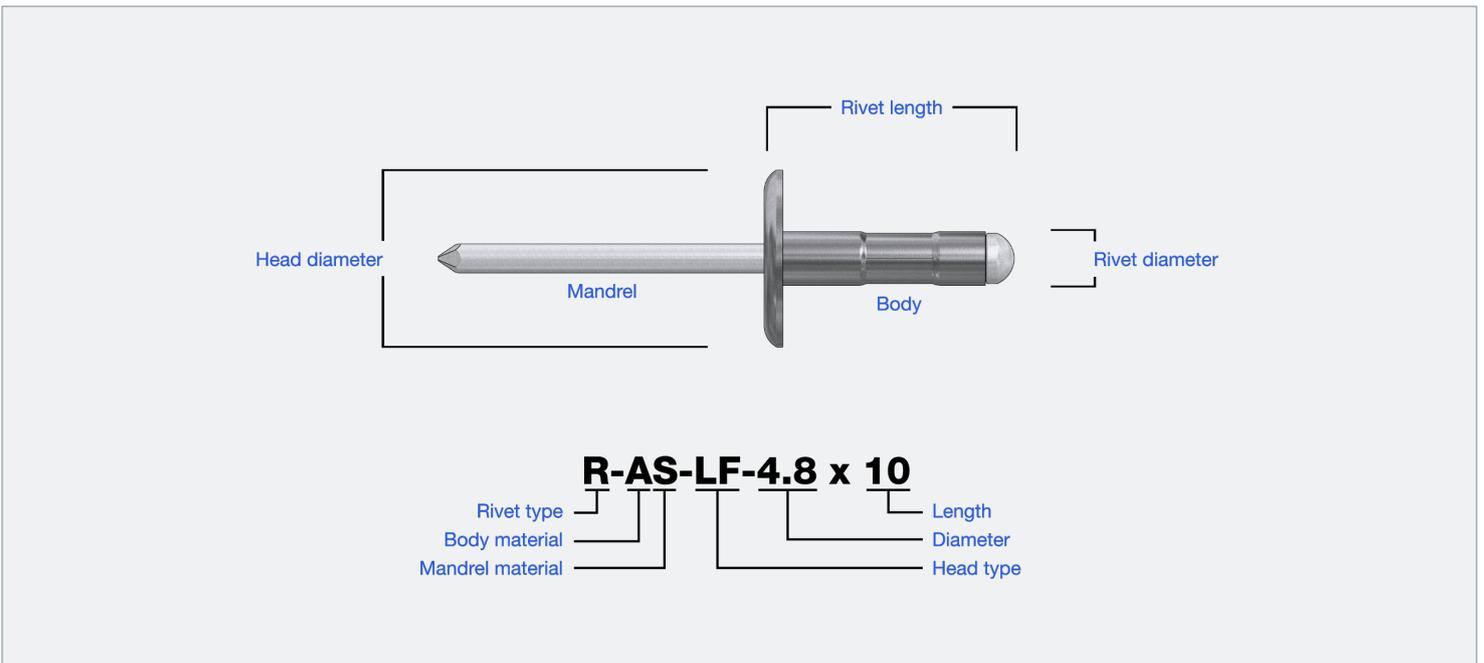

Date generated: 16/01/2026

© FIXFAST Ltd 2026. All information is non-binding and without guarantee. Before using the products, all specifications and calculations must be checked by a suitably qualified person and local regulations must be observed. All rights reserved. Due to a policy of continuous development, FIXFAST reserves the right to change product specification and descriptions without notice. Subject to Fixfast's Terms & Conditions.

# Multi-range Aluminium/Stainless Large Flange Rivets

## Specification

Code	Body dia. (mm)	Drill size (mm)	Head dia. (mm)	Rivet length (mm)	Mandrel dia. (mm)	Grip range (mm)	Shear (N)	Tensile (N)
R-AS-LF-(LAC)-4.0 x 18	4.0	4.1	15	18	2.15	8.0-13.0	1850	2600
R-AS-LF-(LAC)-4.0 x 25				25		12.0-18.0		
R-AS-LF-(LAC)-4.8 x 10	4.8	4.9	16	10	2.8	1.0-6.0	1500	2350
R-AS-LF-(LAC)-4.8 x 17				17		6.0-12.0		
R-AS-LF-(LAC)-4.8 x 19				19		10.0-15.0		
R-AS-LF-(LAC)-4.8 x 25				25		12.0-19.5		
R-AS-LF-(LAC)-5.0 x 12	5.0	5.1	14	12	2.6	6.0-8.0	1850	2600
R-AS-LF-(LAC)-5.0 x 18				18		8.0-14.0		