


**PRODUCT DESCRIPTION**

Lignum Fusion Twelve V Premium

Laminated Wooden Flooring

PROPERTY	INFORMATION
Dimension	1285 x 196 x 12 mm
Packing	Pack quantity = 1.48m <sup>2</sup> 48 cartons per pallet = 71.04m <sup>2</sup>
Production	Direct pressure, melamine impregnated decorative paper onto high density fibreboard core.
Laying	DocLoc glueless locking system Must be laid as a floating floor (see instructions)
Classification (BS EN 13329)	23: Heavy domestic use

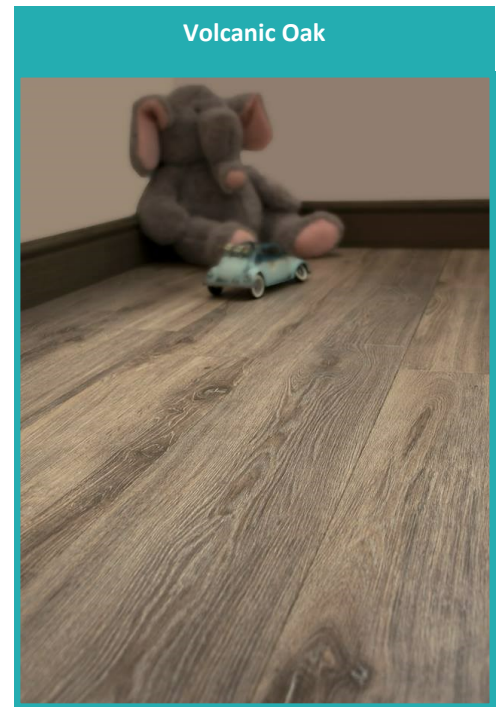

**PRODUCT SPECIFICATION HDF CORE**

FACTOR	STANDARD	COMMENTS
24 hour swelling	EN 622-5	< 17%
Bending strength	EN 622-5	23 N/mm <sup>2</sup>
Moisture content	EN 622-1	4 - 11 %
Formaldehyde	EN 622-1	≤ 8 (Class E1)
Internal bond	EN 622-5	1 N/mm <sup>2</sup>

**PRODUCT SPECIFICATION LAMINATED FLOORBOARDS**

Abrasion	EN 13329	AC4
Impact resistance	EN 13329	≥ IC 1
Stain resistance	EN 438.2.15	Group 1&2: 5      Group 3: 4
Edge swelling	EN 13329	≤ 18 %

Wood Innovations 52 Newry Road, Warrenpoint, County Down, N. Ireland. BT34 3LD

Tel: 028 4177 3366

Email: sales@woodinnovations.co.uk      www.woodinnovations.com