

DHI-NVR2104HS-P-4KS3

4CH Compact 1U 4PoE 1HDD Lite Network Video Recorder



- Supports Smart H.265+, H.265, Smart H.264+, H.264 and MJPEG decoding formats.
- Max. decoding capability: 6 × 1080p@30 fps.
- Max. 80/80/60 Mbps incoming/recording/outgoing bandwidth.
- Supports IP cameras with a resolution up to 12 MP.
- AI by Recorder supports 4-channel SMD Plus.
- AI by Camera supports perimeter protection and SMD Plus.
- Supports one-click arming and disarming.



Series Overview

The NVR2000-4KS3 model of the Lite Series NVR is favored for its outstanding performance. It supports 4K resolution for scenes that require highly detailed images, and can serve as the edge, central, or backup storage with an intuitive shortcut menu for remote management and control. This NVR also features Smart Motion Detection (SMD) by recorder, which can distinguish target vehicles and humans from ordinary ones in real-time. This NVR is both cost-effective and easy-to-install, making it ideal for a wide range of applications such as villas, shops and other small and medium-sized scenes.

Functions

SMD Plus

With intelligent algorithm, Dahua Smart Motion Detection technology can categorize the targets that trigger motion detection and filter the motion detection alarm triggered by non-concerned targets to realize effective and accurate alarm.

Perimeter Protection by Camera

Automatically filters out false alarms caused by animals, rustling leaves, bright lights, etc. Enables system to act secondary recognition for the targets. Improves alarm accuracy.

Technical Specification

| | |
|--|---|
| System | |
| Main Processor | Industrial-grade processor |
| Operating System | Embedded Linux |
| Operating Interface | Web, Local GUI |
| AI | |
| AI by Recorder | SMD Plus |
| AI by Camera | Perimeter protection; SMD Plus |
| Perimeter Protection | |
| Perimeter Performance of AI by Camera (Number of Channels) | 4 channels |
| SMD Plus | |
| SMD Plus by Recorder | 4 channels: Secondary filtering for human and motor vehicle, reducing false alarms caused by leaves, rain and lighting condition change |
| SMD Plus by Camera | 4 channels |
| Audio and Video | |
| Access Channel | 4 channels |
| Network Bandwidth | 80 Mbps incoming, 80 Mbps recording and 60 Mbps outgoing |
| Resolution | 12 MP; 8 MP; 5 MP; 4 MP; 3 MP; 1080p; 720p; D1 |
| Decoding Capability | AI disabled: 1-channel 12 MP@30 fps; 1-channel 8 MP@30 fps; 2-channel 5 MP@30 fps; 3-channel 4 MP@30 fps; 6-channel 1080p@30 fps AI enabled: 1-channel 8 MP@30 fps; 1-channel 5 MP@30 fps; 2-channel 4 MP@30 fps; 4-channel 1080p@30 fps |

NVR2000-4KS3 Series | DHI-NVR2104HS-P-4KS3

| | |
|---------------------------|---|
| Video Output | 1 HDMI, 1 VGA HDMI: 3840 × 2160, 1920 × 1080, 1280 × 1024, 1280 × 720 VGA: 1920 × 1080, 1280 × 1024, 1280 × 720 |
| Multi-screen Display | 1/4 |
| Third-party Camera Access | ONVIF |

Compression Standard

| | |
|-------------------|---|
| Video Compression | Smart H.265+; H.265; Smart H.264+; H.264; MJPEG |
| Audio Compression | G.711a; G.711u; PCM; G726; |

Network

| | |
|---------------------|---|
| Network Protocol | HTTP; HTTPS; TCP/IP; IPv4; IPv6; UDP; NTP; DHCP; DNS; SMTP; IP Filter; DDNS; IP Search (Supports IP camera, DVR, NVS, etc.); P2P; Auto Registration |
| Mobile Phone Access | iOS; Android |
| Interoperability | ONVIF 22.12(Profile T; Profile S; Profile G); CGI; SDK |
| Browser | Chrome; IE; Safari; Edge; Firefox |

Recording Playback

| | |
|------------------------|--|
| Multi-channel Playback | Up to 4 channels |
| Record Mode | General, motion detection; intelligent; alarm |
| Backup Method | USB device and network |
| Playback Mode | Instant playback; general playback; event playback; tag playback; smart playback |

Alarm

| | |
|-------------------|--|
| General Alarm | Motion detection; camera external alarm; PIR alarm |
| Anomaly Alarm | Error (no disk, disk error, low space, low quota space; network disconnection; IP conflict; MAC conflict); video loss; video tampering; camera offline |
| Intelligent Alarm | Perimeter protection; SMD Plus |
| Alarm Linkage | Recording; snapshot; buzzer; log; preset; email; tour |

Port

| | |
|---------------|---|
| Audio Input | 1-channel RCA |
| Audio Output | 1-channel RCA |
| Alarm Input | NA (2 channels are optional) |
| Alarm Output | NA (1-channel 12 V 1 A output is optional) |
| HDD Interface | 1 SATA port. Each disk can contain up to 20 TB. this limit varies depending on the environment temperature. |
| USB | 2 (1 front USB 2.0 port, 1 rear USB 2.0 port) |
| HDMI | 1 |
| VGA | 1 |
| Network Port | 1 (10/100 Mbps Ethernet port, RJ-45) |
| PoE Port | 4 ports, 10/100 Mbps, IEEE 802.3 af/at |

General


| | |
|-------------------|---|
| Power Supply | 53 VDC, 1.22 A |
| Power Consumption | Total output of NVR is <10 W (without HDD) Total output power of PoE is 36 W, the maximum output power of a single port is 25.5 W |

| | |
|-----------------------|---|
| Net Weight | 0.85 kg (1.87 lb) |
| Gross Weight | 1.85 kg (4.08 lb) |
| Product Dimensions | 260.0 mm × 232.5 mm × 47.6 mm(10.24" × 9.15" × 1.87") (W × D × H) |
| Packaging Dimensions | 374.0 mm × 119.0 mm × 311.0 mm(14.72" × 4.69" × 12.24") (W × D × H) |
| Operating Temperature | −10 °C to +55 °C (14 °F to +131 °F) |
| Storage Temperature | −20 °C to +60 °C (−4 °F to +140 °F) |
| Operating Humidity | 10%–93% (RH), non-condensing |
| Installation | Rack or desktop |
| Certifications | CE-LVD: IEC 62368-1:2014 CE-EMC: EN IEC 61000-3-2:2019, EN 61000-3-3:2013+A1:2019, EN 55032:2015+A11:2020, EN 55035:2017+A11:2020, EN 55024:2010+A1:2015, EN 50130-4:2011+A1:2014 |


Ordering Information

| Type | Model | Description |
|------------------------|----------------------|--|
| NETWORK VIDEO RECORDER | DHI-NVR2104HS-P-4KS3 | 4CH Compact 1U 4PoE 1HDD Lite Network Video Recorder |

Dimensions (mm[inch])

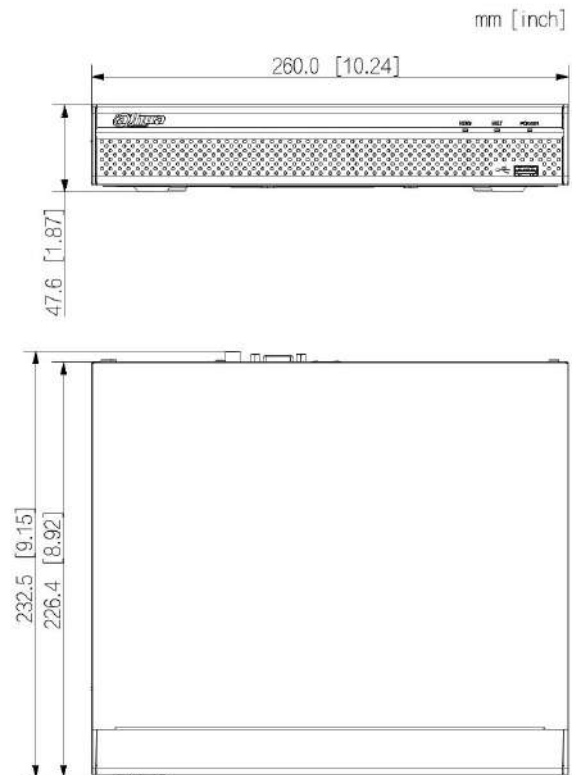

Panels

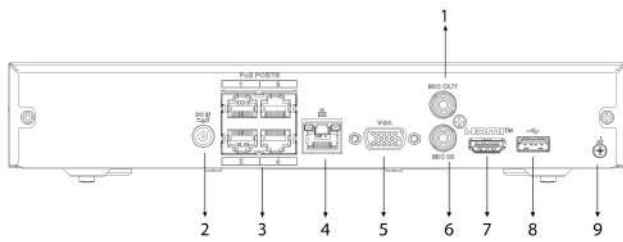

- | | |
|----------------------------|---------------------------|
| 1 AUDIO OUT, RCA Connector | 2 Power Input |
| 3 PoE Ports | 4 Network Port |
| 5 VGA Port | 6 AUDIO IN, RCA Connector |
| 7 HDMI Port | 8 USB Port |
| 9 Ground | |