


## DS-PDSK-P Wired Shock Detector



- Reliable perimeter protection offering early detection
- Adjustable sensitivity with gross attack override
- Advanced Digital Background-Noise Filter



## ▪ Dimension

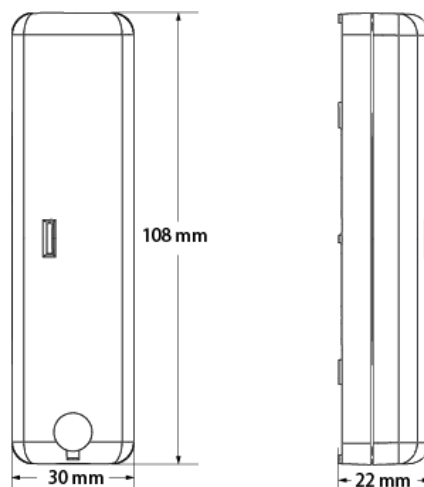

## ▪ Specification

Detection Performance	
Detection Method	Shock Sensor
Sensitivity	Potentiometer Adjustment
Feature	
Digital Processing	Support
Tamper Protection	Front
Interface	
Alarm Output	Normally Closed
LED Indicator	Blue(Alarm)
Transmission	
Transmission Method	Wired
Electrical Characteristics	
Power Supply	9 - 16 VDC
Typical Voltage	12 V
Power Consumption	30mA
General	
Operation Temperature	-10 °C to 55 °C (14 °F to 131 °F)
Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
Operation Humidity	10% to 90%
Dimension(WxHxD)	30 mm x 108 mm x 22 mm
Weight	37.5 g
Application Scenario	Indoor

## ▪ Available Model

DS-PDSK-P