Pro Vision Omni



Install Guide



What's included

✓ DVR

Net antenna

 \odot

Power cable

GPS antenna

Camera splitter

Will also have all of the different cameras you have chosen













Step 1

Mounting

- **A.** Find desired mounting locations for the cameras you chose and mount them.
- 1. Front and inside-facing cameras should be mounted as close to the center of the windshield as possible.
- 2. Rear and side cameras can be mounted based on your needs.
- B. Mount the GPS and Network antennas up near the top of the windshield and route the cables through the headliner and down through the pillar to be sure they will not hang in front of the driver's view.

Step 2

Power connections

- **A.** Find a desired location for the DVR that will be near a constant power, ignition power and ground source.
- B. Power cable configuration.
- 1. The **red wire** will be wired to constant power.
- 2. The yellow wire will be wired to the ignition source.
- 3. The **black wire** will be wired to ground.
- 4. The 15A fuse must then be installed in the fuse location.



Pro Vision Omni



Install Guide



Step 2


Power connections (continued)

C. Route cables from your mounted cameras (using extension cables, if needed) and plug them into the splitter cable, then plug the splitter cable into the DVR.



NOTE: It is recommended to plug any front and inside-facing cameras in to channels 1 and 2.

D. Connect the GPS and Network cables to the DVR.

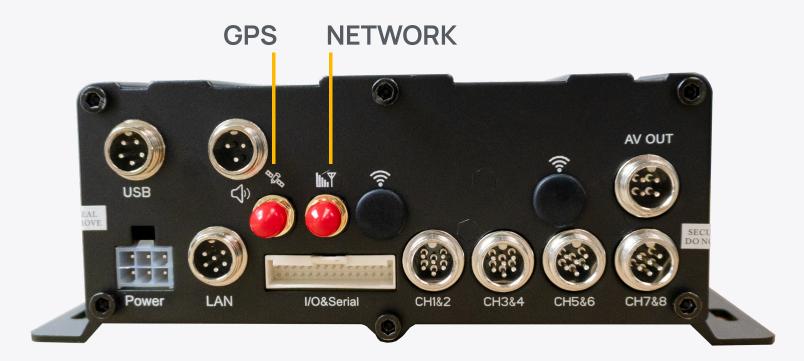

E. Finally, plug in your power cabling and power the truck on to check for lighting on the front of the DVR.