

Microswitch Kit, Quick Connect for XV™ Control System



P/Ns: 87-120039-001, 87-120039-501

FEATURES

- **For Use in:**
 - WHDR™ Commercial Cooking Fire Suppression Systems
 - IND™ Industrial Fire Suppression Systems
- **For Use with XV Control System**
- **Stackable with Alarm/Release Terminal Type XV™ Control System Microswitch**

DESCRIPTION

The Quick Connect Microswitch used with the XV Control System is a single pole, double-throw switch (Figure 1). Included in the microswitch kit is the microswitch, pigtail assembly, mounting screws, and wiring diagram label. Microswitch Kit P/N 87-120039-001 includes a pigtail assembly with solid color leads. Microswitch Kit P/N 87-120039-501 includes a pigtail assembly with striped leads. All wire leads are 24 inches (610 mm) in length.

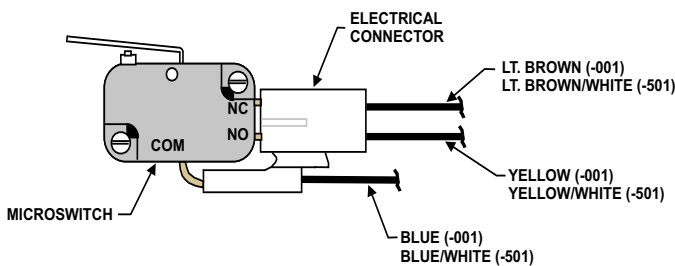


Figure 1. Quick Connect Microswitch

Quick Connect Microswitches are used to open or close electrical circuits, including, but not limited to:

- Electric appliance shutdown
- Make-up air shutdown
- Electric gas valve shutdown
- Shuntbreaker/relay

Electrical appliances typically have higher amp ratings than those of the microswitches (Table 1).

Table 1. Electrical Ratings

125/250 Vac	20-1/2 Amps
250 Vac	1-1/2 HP
125 Vac	1/2 HP

In this case, appliances shall not be wired directly to the microswitch. A magnetic contactor or relay must be used. For wiring the microswitch with the XV Control System, refer to Figure 2.

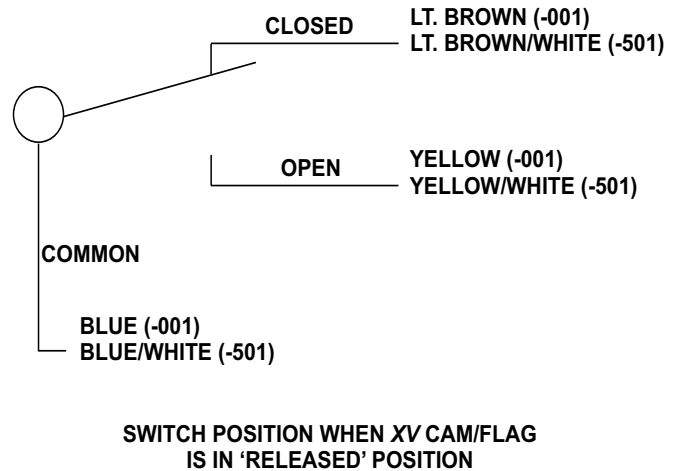


Figure 2. Microswitch in Released Position

Quick Connect Microswitch Kits are not for alarm initiation or solenoid release. A separate Alarm/Release Terminal Type Microswitch (P/N 87-120047-001) is available.

The XV Control System has two separate microswitch mounting locations to support up to four (4) microswitches (any combination of Quick Connect and/or Alarm/Release type). Each of the two mounting locations has a corresponding EMT port for wire leads, allowing the use of two electrical junction boxes for separation of signal lines and AC lines.

ORDERING INFORMATION

Description	Part Number
Quick Connect Microswitch Kit, SPDT, Solid Leads	87-120039-001
Quick Connect Microswitch Kit, SPDT, Striped Leads	87-120039-501
XV Control System	87-120099-002
EMT Connector Kit (set of 3)	87-120058-001
Alarm/Release Terminal Type Microswitch	87-120047-001

Kidde Fire Systems, Kidde Fire Protection and Fenwal Controls branded products are created exclusively by Kidde-Fenwal, LLC, 400 Main St, Ashland, MA 01721, USA
All other trademarks are the property of their respective owners.

This literature is provided for informational purposes only. Kidde-Fenwal, LLC believes this data to be accurate, but it is published and presented without any guarantee or warranty whatsoever. Kidde-Fenwal, LLC assumes no responsibility for the product's suitability for a particular application. The fire suppression system design, installation, maintenance, service and troubleshooting must be performed by trained, authorized Kidde Fire Systems distributors for the product to work correctly. If you need more information on this product, or if you have a particular problem or question, contact: Kidde-Fenwal, LLC, Ashland, MA 01721 USA, Tel: +1 (508) 881-2000.



K-87-030 Rev AC
© 2025 Kidde-Fenwal, LLC

EXPORT INFORMATION (USA)
Jurisdiction: EAR
Classification: EAR99

This document contains technical data subject to the EAR.

Kidde-Fenwal, LLC
400 Main Street
Ashland, MA 01721
Ph: 508.881.2000
kiddefenwal.com