

**EVERCLEAN® WHIRLPOOL:**

- Minimalist design with contoured backrest
- Acrylic with fiberglass reinforcement
- Pre-leveled tub bottom
- Drop-in or under-mount installation
- EverClean System
- Single speed, self-draining pump/motor
- Side-mounted air switch On/Off
- Two silent air volume controls
- Eight multi-directional and flow-adjustable jets
- Whirlpool heater Quick-Connect system  
(Safe-T-Heater purchased separately)

- 2940.018C-D0** Zero-Edge™ low-profile 0.5" deck height
- 2940.018C-D2** Standard profile 2" deck height

**BATHING POOL:**

- Same as above without whirlpool system

- 2940.002-D0** Zero-Edge low-profile 0.5" deck height
- 2940.002-D2** Standard profile 2" deck height

**Nominal Dimensions:**

72" x 36" x 22-1/2"  
(1829 x 914 x 572mm)

**Compliance Certifications -**

**Meets or Exceeds the Following Specifications:**

- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.7M for Whirlpool Appliances
- ANSI Z124.1 for Plastic Bathtubs
- ASTM E162 for Flammability
- NFPA 258 for Smoke Density

American Standard whirlpools and air baths with EverClean incorporate a patented silver-ion additive right into the circulation piping to protect the pipes from mold, mildew, algae and fungus that could cause deterioration or staining of the pipes.



**To Be Specified - Required:**

- Color:
- Bath Filler: (specify finish)
- Bath Drain: (specify finish)

**To Be Specified - Optional:**


- Safe-T-Heater\*: 9075.120

For color/finish availability and other faucet choices, please see the Product Selector and Pricing Guide.

\* **NOTE:** The Safe-T-Heater is designed to maintain water temperature during operation. It will not heat cold water to desired bathing temperature.


SEE REVERSE SIDE FOR ROUGHING-IN DIMENSIONS  
AND PRODUCT SPECIFICATIONS

SPECIFICATIONS:

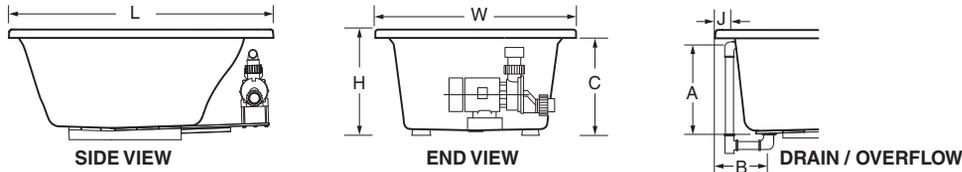

GENERAL SPECIFICATIONS FOR STUDIO 6' X 36" WHIRLPOOLS AND BATH TUBS

Description	Deck Trim Option	Dimensions L-W-H	Drain / Overflow	Height to Underside of Deck: C	Cut Out Pier G x F	Rough-In Recess E x D	Weight with Water / Floor Loading	Product Weight	Gallon to Overflow	Whirlpool Operating Volume
2940 Studio 6' x 36"	Zero (5/8")	L 71-1/2" (1816mm) W 35-1/2" (902mm) H 22-1/2" (572mm)	A 17-3/4" (451mm) B 10-3/4" (273mm)	C 21-7/8" (556mm)	70" (1778mm) x 34" (864mm)	71-11/16" (1821mm) x 34" (864mm)	846 lb. (384 kg)/ 47 lb./sq.ft. (230 kg/sq.m)	105 lb. (231 kg.)	89 gal. (337 l.)	81 gal. (307 l.)
2940 Studio 6' x 36"	2"	L 71-3/4" (1822mm) W 35-3/4" (908mm) H 22-1/2" (572mm)	A 17-3/4" (451mm) B 10-7/8" (276mm)	C 20-1/2" (521mm)	70-1/4" (1784mm) x 34-1/4" (870mm)	71-15/16" (1827mm) x 34-1/4" (870mm)	846 lb. (384 kg)/ 47 lb./sq.ft. (230 kg/sq.m)	105 lb. (231 kg.)	89 gal. (337 l.)	81 gal. (307 l.)

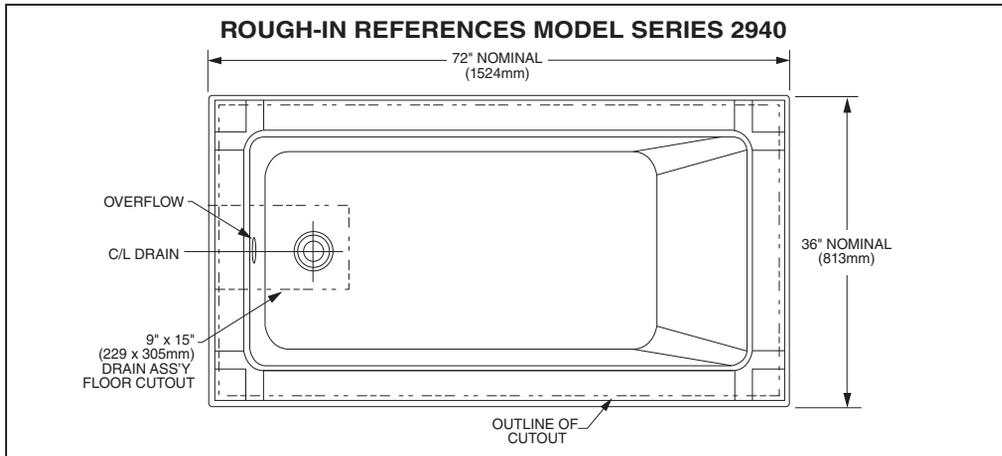

GENERAL SPECIFICATIONS FOR 2940 STUDIO® WHIRLPOOL	
INSTALLED SIZE	72 x 36 x 22-1/2 In. (1829 x 914 x 572mm)
WEIGHT	105 Lbs. (48 Kg.)
WEIGHT w/WATER	846 Lbs. (384 Kg.)
GAL. TO OVERFLOW	89 Gal. (337 L)
MIN. OPERATING VOL.	81 Gal. (307 L)
BATHING WELL AT SUMP	52-1/4 x 24 In. (1327 x 610mm)
BATHING WELL AT RIM	63 x 27 In. (1600 x 686mm)
WATER DEPTH TO OVERFLOW	14 In. (356mm)
FLOOR LOADING (PROJECTED AREA)	47 Lbs./Sq.Ft. (230 Kgs./Sq.m)
PTS.	25.6
CUBE (FT³)	48.3

GENERAL SPECIFICATIONS FOR 2940 STUDIO® BATHING POOL	
INSTALLED SIZE	72 x 36 x 21 In. (1829 x 914 x 533mm)
WEIGHT	78 Lbs. (35 Kg.)
WEIGHT w/WATER	819 Lbs. (372 Kg.)
GAL. TO OVERFLOW	89 Gal. (337 L)
BATHING WELL AT SUMP	52-1/4 x 24 In. (1327 x 610mm)
BATHING WELL AT RIM	63 x 27 In. (1600 x 686mm)
WATER DEPTH TO OVERFLOW	14 In. (356mm)
FLOOR LOADING (PROJECTED AREA)	46 Lbs./Sq.Ft. (222 Kgs./Sq.m)
PTS.	25.6
CUBE (FT³)	48.3

NOTES:

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND, OR PENINSULA TYPE INSTALLATION. SUMP OF BATH IS SUPPORTED BY INTEGRAL FEET. NO ADDITIONAL SUPPORT REQUIRED. ENCLOSING MATERIAL BY OTHERS.

REFER TO INSTALLATION INSTRUCTIONS SUPPLIED FOR ADDITIONAL INFORMATION.

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IF INSTALLING A DECK-MOUNTED FITTING, BEFORE DRILLING ANY HOLES: CHECK FOR INTERFERENCE WITH CIRCULATING SYSTEM PIPING, DRAIN OVERFLOW, AND APRON INSTALLATION. MOUNTING HOLES DRILLED BY INSTALLER.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.