




The new degree of comfort.®

## Professional **Classic**® electric water heaters are engineered for longer life – resisted heating elements and premium grade anode rod

### Efficiency

- .90 - .93 UEF
- Isolated tank design reduces conductive heat loss
- Resistored stainless steel upper and lower heating elements to prolong anode rod and tank life



### Performance

- FHR: 44 - 72 gallons, based on gallon capacity
- Recovery: 21 GPH at a 90° F rise†

### Longer Life

- Premium grade anode rod provides long-lasting tank protection

### Features

- Electric junction box located above heating elements for easy installation
- Over-temperature protector cuts off power in excess temperature situations
- Automatic thermostat keeps water at desired temperature

### Plus...

- Rheemglas® tank lining resists corrosion and prolongs tank life
- EverKleen® self cleaning device fights harmful sediment build-up with a high-velocity spiraling water stream – helps operating efficiency by saving energy, money and improving tank life



- Enhanced-flow brass drain valve
- Temperature and pressure relief valve included
- Models are compliant to HUD Standards for manufactured housing and modular construction
- Low lead compliant

### Warranty

- 6-Year limited tank and parts warranty\*
- With ProtectionPlus™ the 6-year limited tank warranty becomes 10-year

\*See Residential Warranty Certificate for complete information

Units meet or exceed ANSI requirements and have been tested according to the AHRI Operations Manual and D.O.E. procedures. Units meet or exceed the energy efficiency requirements of NAECA, ASHRAE standard 90, ICC Code and all state energy efficiency performance criteria.



**Professional *Classic***  
19.9 to 55-Gallon Capacities  
240 Volt AC/Single Phase  
Double and Single Element Models  
Electric



See specifications chart on back.





The new degree of comfort.®



## Professional Classic® Specifications

TYPE	DESCRIPTION			FEATURES		ROUGHING IN DIMENSIONS (SHOWN IN INCHES)				ENERGY INFO.
	NOMINAL GALLON CAPACITY	RATED GALLON CAPACITY	MODEL NUMBER	FIRST HOUR RATING (GALLONS)	RECOVERY IN G.P.H. 90° F RISE	TANK HEIGHT A	HEIGHT TO WATER CONN. B	DIAMETER C	APPROX. SHIP WT. (LBS.)	UNIFORM ENERGY FACTOR (UEF)
Tall	30	27	PROE30 T2 RH95	44	21	47-1/2	50-3/8	19	92	0.92
Tall	40	36	PROE40 T2 RH95	55	21	60-3/4	63-5/8	19-1/4	109	0.93
Tall	50	45	PROE50 T2 RH95	63	21	58-5/8	61-5/8	20-1/4	121	0.93
Tall	55	55	PROE55 T2 RH94	72	21	57	59-3/4	22-1/4	128	0.92
Med.	30	27	PROE30 M2 RH95	45	21	37-1/2	40-1/2	20-1/4	92	0.90
Med.	40	36	PROE40 M2 RH95	55	21	48-1/4	50-1/2	20-1/4	106	0.93
Med.	50	45	PROE50 M2 RH95	62	21	48	50-1/2	23	132	0.93
Short	19.9	-	PROE20 S2 RH	-	21	31-1/2	31-1/2	17	62	-
Short	28	25	PROE28 S2 RH95	45	21	30	31-1/8	23	95	0.92
Short	30	27	PROE30 S2 RH95 B*	46	21	30	32	19-3/4	110	0.92
Short	36	33	PROE36 S2 RH95	46	21	31-1/2	33	24-1/4	118	0.92
Short	38	35	PROE38 S2 RH95 B**	51	21	31-1/2	34	23	108	0.92
Short	47	43	PROE47 S2 RH95	54	21	32	34	26-1/4	149	0.93

Uniform Energy Factor and rated gallon capacity based on Department of Energy (DOE) requirements.

\*Insulation blanket(s) required to achieve UEF value. Water heater dimensions prior to installing insulation blanket(s). Blanket(s) will be included with water heater. The blanket(s) add 2-1/2 inches to the tank height and 10 inches to tank diameter.

\*\*Insulation blanket(s) required to achieve UEF value. Water heater dimensions prior to installing insulation blanket(s). Blanket(s) will be included with water heater. The blanket(s) add 2 inches to the tank height and 4 inches to tank diameter.

• Heaters furnished with standard 240 volt AC, single phase non-simultaneous wiring, and 4500 watt upper and lower heating elements.

• **If heating elements of different wattages than those shown are demanded by zone requirements, they must be specifically requested.**

• Single element models available on special order (6000W max.). Substitute "1" for "2" in model number.


• Special Wiring Options – A limited number of special wiring options are available. Consult factory for price and availability.

• All models equipped with heat traps.

$$\text{Recovery} = \frac{\text{wattage}}{2.42 \times \text{temp. rise } ^\circ\text{F.}}$$

Example:  $\frac{4500\text{W}}{2.42 \times 90^\circ} = 21 \text{ GPH}$

\*Recovery calculations used are based on 4500 watt elements used in non-simultaneous operation.

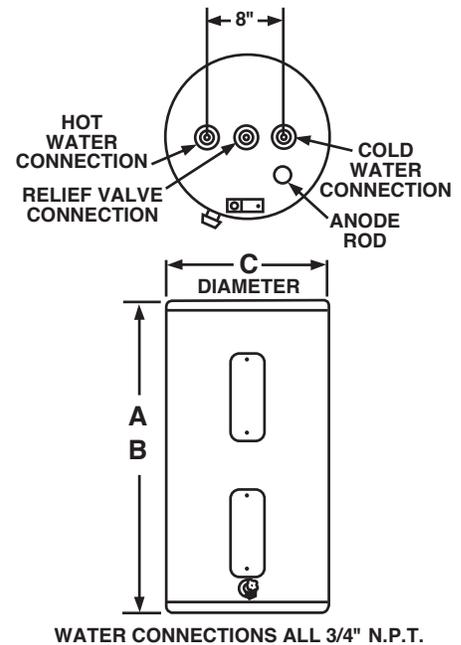

*In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.*

Rheem Water Heating • 1115 Northmeadow Parkway, Suite 100  
Roswell, Georgia 30076 • www.rheem.com



INTEGRATED HOME COMFORT