



WhisperRecessed® LED Ventilation Fan/Light

**Energy efficient
8 Watt lamp!**

WhisperRecessed® LED
VENTILATION FAN

FV-08VRE2



- Includes (1) replaceable, 8W ENERGY STAR 2.0 certified, GU24 base LED lamp, JA-8 compliant for CA Title 24 and Title 20
- ENERGY STAR® rated architectural grade recessed fan with dimmable LED light
- Quiet, energy efficient and powerful 80 CFM ventilation hidden above the ceiling
- Ideal for use in the bathroom, living room or laundry room
- Beautiful lighting with 6" aperture and advanced luminaire design

ADDITIONAL BENEFITS

- Can be used to comply with ASHRAE 62.2, LEED, CALGreen*, JA8 compliant for CA Title 24 & Title 20
- Integrated 4" or 6" duct adapter
- UL listed for tub/shower enclosure when GFCI protected
- IC rated
- 5-year warranty on LED, 3-years on parts

*Can be used to comply with CALGreen when controlled by the Panasonic Condensation Sensor Plus



The Design Solution for Fan/LED Light Combinations


WhisperRecessed® LED
VENTILATION FAN

**Energy efficient
8 Watt lamp!**




FV-08VRE2

FV-08VRE2

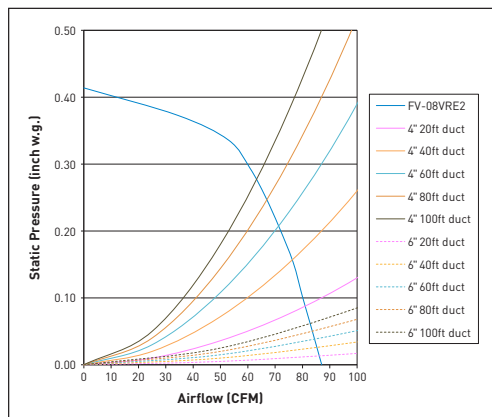

FV-08VRE2

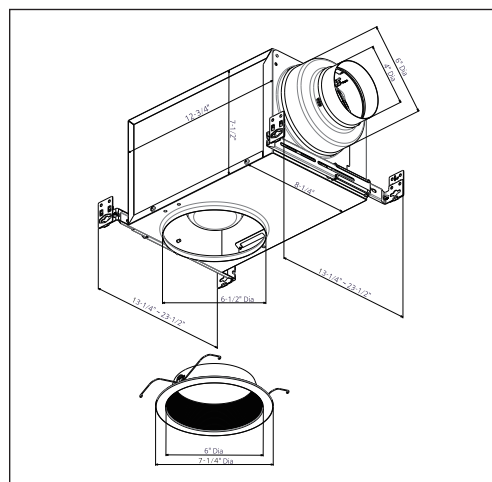

NEW! LED Lighting

(1) 8 Watt GU24 base LED lamp, /2700 Kelvin Warm White/>92CRI/720 lumens/90 LPW/ ENERGY STAR 2.0 certified, JA-8 compliant for CA Title 24 and Title 20, 25,000 rated average life.

Specifications		WhisperRecessed LED	
		FV-08VRE2	
Characteristics (HVI tested data for 0.1" S.P.)	Static Pressure in inches w.g.	0.1	0.25
	Air Volume (CFM)	80	66
	Noise (sones)	1.0	0.8
	Power Consumption (watts)	18.5	17.6
	Energy Efficiency (CFM/watt)	4.4	3.8
	Speed (RPM)	1342	1480
	Current (amps)	0.15	0.15
	MAX. Current (amps)	0.19	
	Power Rating (V/Hz)	120/60	
	Motor Type	AC	
Specifications	Type of Motor Bearing	Ball	
	Thermal Fuse Protection	Yes	
	Blower Wheel Type	Sirocco	
	ENERGY STAR Qualified	Yes	
	Duct Diameter (inches)	4" or 6"	
Installation	Housing Collar Opening (Inches)	6-1/2" Round	
	Trim Outer Diameter (Inches)	7-1/4" Round	
Light Specifications	Lamp Watts	1 x 8w	
	Lumens (lm)	720	
	Lumens Per Watt (LPW)	90	
	Color Rendering Index	92	
	Color Temperature (Kelvin)	2,700	
	Rated Life (hours)	25,000	
	Lamp Model # [Green Creative]	8BR30DIM927/GU24	
	Type of Lamp Socket	GU24	
Shipping	Gross Weight (lbs)	10.4	
Approved Code/Standard/Regulation	UL tub/Shower Enclosure	Yes	
	CALGreen	Yes*	
	Washington VIAQ Code	Yes	
	California Title 24 & Title 20 Compliant	Yes	
	Mfg in ISO 9001 Certified Facility	Yes	

*Can be used to comply with CALGreen when controlled by the Panasonic Condensation Sensor Plus.
As tested by an EPA recognized lab
Powerful Performance at 0.25"



Panasonic
IAQ Division
Two Riverfront Plaza
Newark, NJ 07102
na.panasonic.com/us/iaq

For Order Information
PHONE: 866-292-7299
FAX: 888-553-0723
ventfans@us.panasonic.com