
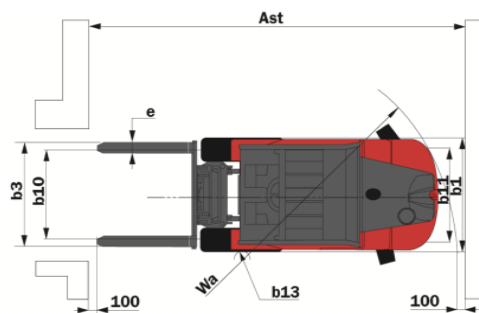


CHARIOT FRONTAL DIESEL MSI30

ABaque

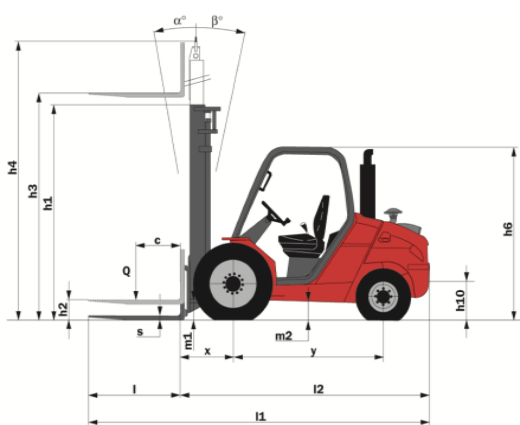

DONNÉES TECHNIQUES

	MSI 25 T/G + BUGGIE	MSI 30 T/G + BUGGIE		MSI 25 T/G + BUGGIE	MSI 30 T/G + BUGGIE		MSI 25 T/G + BUGGIE	MSI 30 T/G + BUGGIE		MSI 25 T/G + BUGGIE	MSI 30 T/G + BUGGIE
A	1100mm	1100mm	G1*	260mm	260mm	K	1260mm	1260mm	U	2105mm	2105mm
B	180mm	1800mm	G2	215mm	215mm	L	40mm	45mm	U*	1990mm	1990mm
C	625mm	630mm	G2*	230mm	230mm	N	1450mm	1450mm	V	2600mm	2635mm
D	2945mm	2980mm	G3	270mm	270mm	O	100mm	100mm	V1	150mm	150mm
E	4045mm	4080mm	H	2300mm	2400mm	P1	49,5°	49,5°	W	1323mm	1323mm
F	1046mm	1046mm	H*	1950mm	2050mm	P2	40,5°	40,5°	Y	12°	12°
F1	1102mm	1102mm	H1	4131mm	4193mm	P3	44°	40°	Z	10°	10°
G	270mm	270mm	H1*	4470mm	4500mm	R	2310mm	2310mm			
G*	240mm	240mm	I	520mm	550mm	S	2545mm	2580mm			
G1	260mm	260mm	J	1025mm	1025mm	T	4525mm	4560mm			

	MSI 3,0 & 3,5 T		DUPLEX LEVÉE LIBRE				TRIPLEX LEVÉE LIBRE								
			DLL37	DLL40	DLL45		TLL37	TLL40	TLL43	TLL47	TLL50	TLL55	TLL60	TLL65	TLL70
h3*	Hauteur de levée en mm		3700	4000	4500		3700	4000	4300	4700	5000	5500	6000	6600	7000
h1	Hauteur mât baissé en mm		2560	2750	3000		2050	2150	2300	2400	2560	2750	3000	3250	3500
h2	Levée libre en mm		1806	1996	2246		1297	1397	1547	1647	1807	1997	2247	2497	2747
h4	Hauteur mât déployé en mm		4499	4799	5299		4500	4800	5100	5500	5800	6300	6800	7300	7800
	Capacité résiduelle à hauteur max MSI30 - CGD500 en kg		3000	3000	2600		3000	3000	2800	2600	2400	1900	1500		
	Capacité résiduelle à hauteur max MSI35 - CDG 500 en kg		3500	3400	2700		3400	3400	3100	2700	2500	2100	1800	1200	

HAUTEUR 15,50m

DIMENSIONS TRANSPORT 4,080 x 1,323 x 2,30m

DIMENSIONS DE LA PLATE-FORME 6,07 x 2,30m

EXTENSION DE LA PALTEFORME 1,80m

POIDS 4704 kg

ENERGIE Diesel

CAPACITÉ DE CHARGE 3000 kg