

Prelude Hvid 1210lm 3000K Ra>80 Bagkantsdæmp

EAN: **7021981113452**
 SG code: **111345**



Lysteknik

Lyskilde: LED
 Wattage: 15W
 System wattage: 15W
 Luminous flux: 1210lm
 Effekt: 81 lm/W
 Spænding: 230V
 Farvetemperatur: 3000K
 Farvegengivelse (CRI): Ra>80
 MacAdams faktor: SDCM: 3
 Levetid: L70/B10>50.000
 Lysteknik: Direkte
 Optik: Plast opal

Dimmertype

Type: Bagkantsdæmp

Beskyttelse

Isolationsklasse: Klasse I
 IP-klasse: IP44 (monteret vandret)/IP20 (monteret lodret)
 Vandal class: IK05
 Ta nominel: Ta=25°C

Energi og godkendelser

Energiklasse: A+
 Godkendelse: CE

Materialer og overflader

Armaturhus: Aluminium
 Farve: Mat hvid (RAL 9003)
 Optik: Akryl

Montering/Tilslutning



Montering: Påbygget, Indoor
 Kobling: Klemmerække
 Max. luminaires per circuit breaker: B10: 23, B16: 37, C10: 29, C16: 46

Dimension (mm)

Bredde (W): 510
 Højde (H): 70
 Depth (D): 80
 Vægt (brutto/netto): 0.81 / 0.82

Forpakning

Forpkningsstørrelse: 510 x 80 x 90

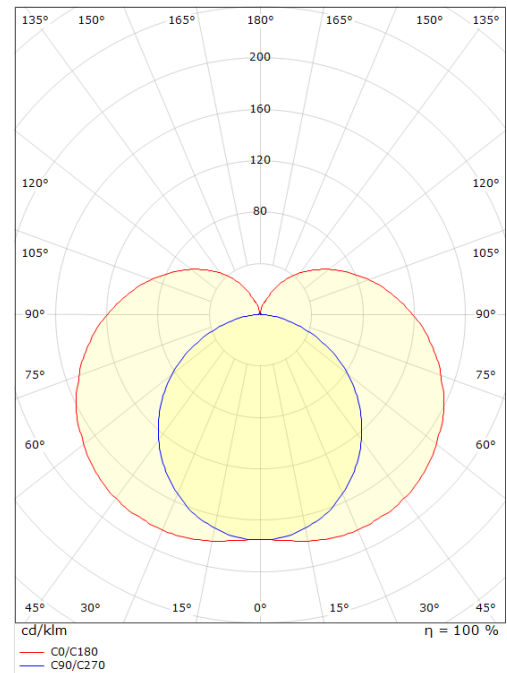

7 0 2 1 9 8 1 1 1 3 4 5 2