



A high-quality, modern chrome faucet with a single-lever design. The faucet has a tall, cylindrical body and a long, horizontal spout that can be pulled out. The top of the faucet features a circular control knob with a small square logo and two small indicator lights (red and blue). The entire fixture is made of polished chrome, giving it a clean, reflective appearance.

Funktionelle overvejelser og et dedikeret detaljeniveau, giver en ny brugeroplevelse.

Produceret i Europa

Håndvaskarmatur med maksimal komfort

- Håndvask
- Et-greb, Cold Start
- Bordmontret
- Forkromet
- Fast tud
- PCA® - konstant flowmængde uanset trykudsving
- Étgreb, Pin greb, Varmt/Koldt symboler
- Mulighed for begrænsning af max. temperatur og vandmængde, Energibesparende variant (Cold Start) - koldt vand i midter positionen
- Ø 30 mm keramisk indsats til mængde- og temperaturregulering
- Fleksible tilslutningsslanger
- DZR messing, 3S-Installation for sikker og nem montering
- Uden bundventil

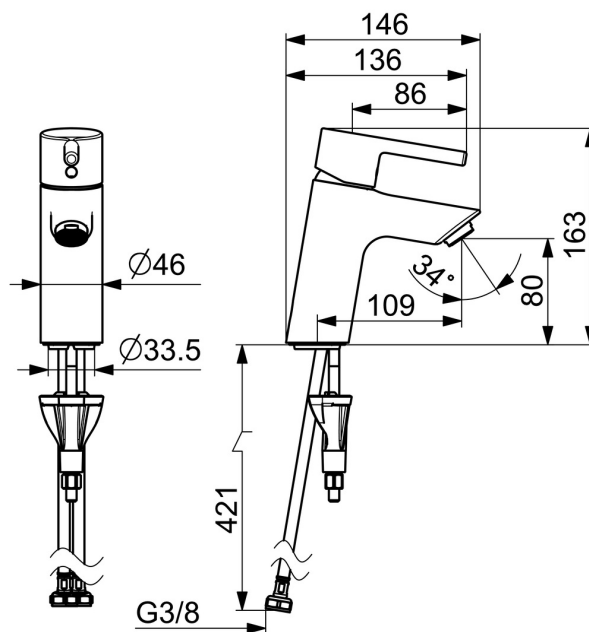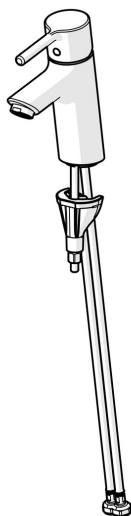

Tekniske data

Flow attributter

Eco-flow ved 300 kPa	0.075 l/s
Vandmængde ved 300 kPa (med mængdebegrænser)	0.083 l/s
Tryk tab (0.1 l/s)	155 kPa

Tekniske egenskaber


Varmtvandsforsyning	max. +80°C
Arbejdsdruk	50 - 1000 kPa
Tilslutningsstørrelse	G3/8
Fremspring	114 mm
Forebyggelse af tilbageløb (EN1717)	AA
Materiale	brass

Bestemmelser


EN standard	EN 817
Støjklasse	I (ISO 3822)

Godkendelser og Erklæringer

Declaration of conformity	DoC
---------------------------	-----

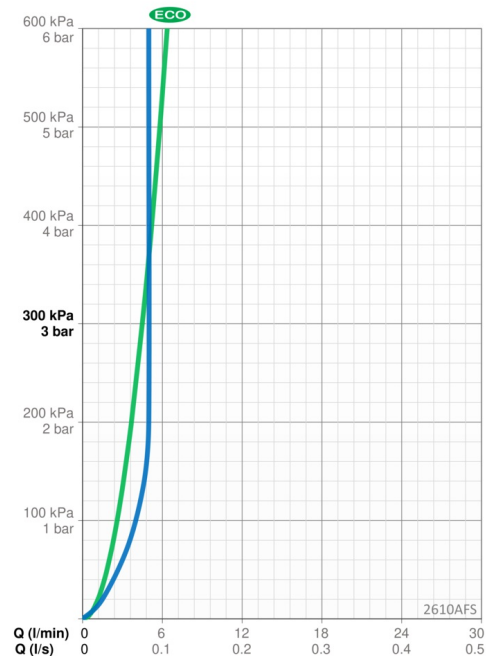

Reservedele

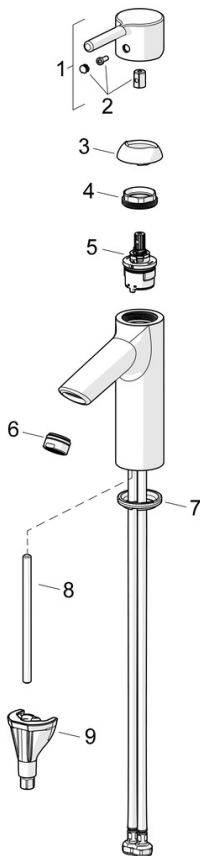

SP2610AFS

	Navn	Kode	VVS
01	Greb Forkromet	1002095V	745131534
02	Mærkeknapper Forkromet	1012105V	745131224
03	Dækkappe Forkromet	1012421V	745131684
04	Møtrik, M34x1.5	1012133V	745131135
05	Komplet indmad, 3.0 cold start	1014430V	745131507
06	Luftblander, M24x1, 6 l/min Forkromet	601974V	745131612
07	Bundpakning	1002371V	704209990
08	Gevindstang, M8x1, L=130	1000780V	704270995
09	Bespændingssæt	602610V	704270996