

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** Schneider Electric

**Supplier's address:** Support, [www.se.com/ww/en/work/support/country-selector/contact-us.jsp](http://www.se.com/ww/en/work/support/country-selector/contact-us.jsp)  
SCHNEIDER ELECTRIC INDUSTRIES SAS, 35 rue Joseph Monier, 92500 Rueil Malmaison, France

**Model identifier:** IMT47278

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	Connecting lead		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------


### General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer		67	Energy efficiency class	D
Useful luminous flux ( $\phi_{\text{use}}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		11 000 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power ( $P_{\text{on}}$ ), expressed in W		67,0	Standby power ( $P_{\text{sb}}$ ), expressed in W and rounded to the second decimal	-
Networked standby power ( $P_{\text{net}}$ ) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, light-	Height	8	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width	300		
	Depth	300		

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,382 0,380	
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value	0	Survival factor	0,90	
the lumen maintenance factor	0,96			


(a) '-': not applicable;

(b) '-': not applicable;

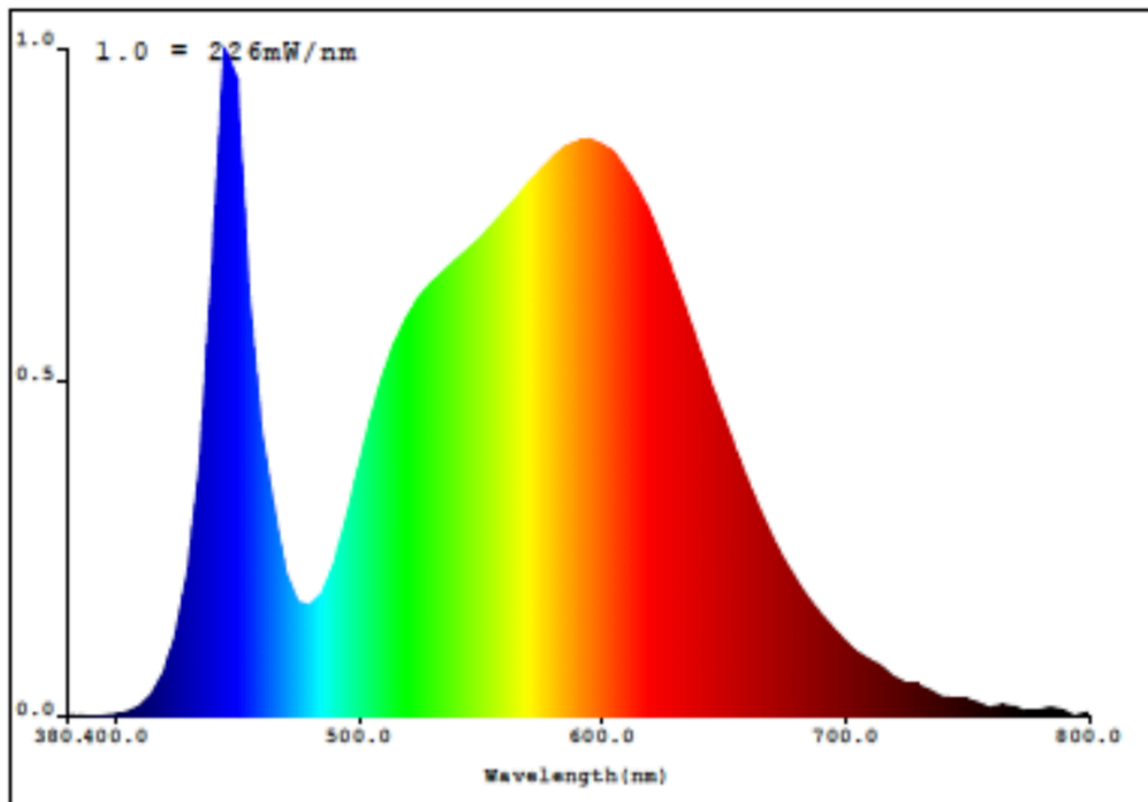

Internal

Model placed on the Union market from 01/12/2022



**EPREL registration number:** 1261478

<https://eprel.ec.europa.eu/qr/1261478>

**Supplier:** SCHNEIDER ELECTRIC INDUSTRIES SAS (Manufacturer)

**Website:** [www.se.com](http://www.se.com)

**Customer care service:**

**Name:** Support

**Website:** [www.se.com](http://www.se.com)

**Email:** [e-label@se.com](mailto:e-label@se.com)

**Phone:** Support number

**Address:**

[www.se.com/ww/en/work/support/country-selector/contact-us.jsp](http://www.se.com/ww/en/work/support/country-selector/contact-us.jsp)

SCHNEIDER ELECTRIC INDUSTRIES SAS, 35 rue Joseph Monier, 92500 Rueil Malmaison, France