
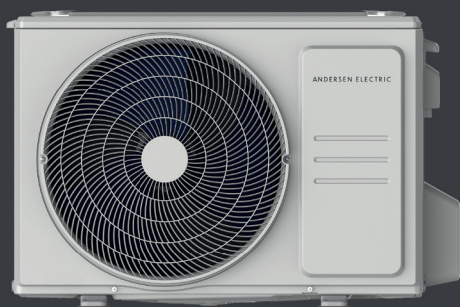


4-VEJS LUFT TIL LUFT
VARMEPUMPE / AIRCONDITION


CEILING CASSETTE

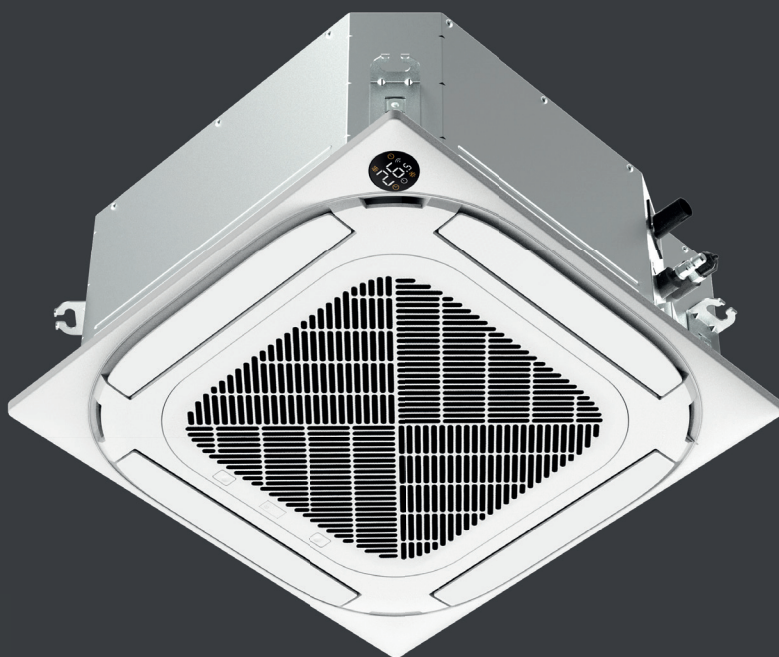

ANDERSEN ELECTRIC

TEKNISK DATA

CEILING CASSETTE

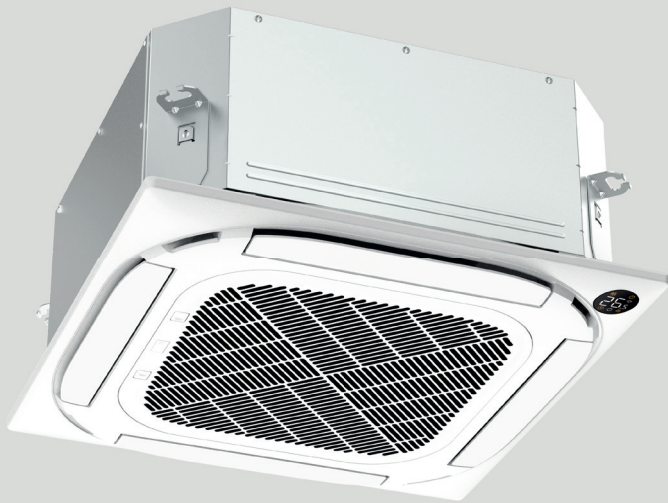

Energibesparende
(A++ / A+)



Til nordisk klima
(-20°C)



Lavt støjniveau



Styring med
remote



Styring med
app / Wi-Fi



Kablet
kontrolpanel

KASSETTE (INDEENHED)		Enhed	Cassette 26	Cassette 35	Cassette 53	Cassette 71	Cassette 105	Cassette 121	Cassette 140	Cassette 150
Kølekapacitet	Min / Max	kW	2.64 (0.36~3.40)	3.52 (0.85~4.16)	5.28 (2.90~5.59)	7.03 (3.29~7.91)	10.55 (2.70~11.43)	12.02 (2.93~12.31)	14.07 (3.52~15.83)	15.24 (4.10~16.12)
Varmekapacitet	Min / Max	kW	2.93 (0.45~3.61)	3.81 (0.47~4.34)	5.57 (2.37~6.10)	7.62 (2.79~8.50)	11.14 (2.78~12.30)	13.48 (3.37~14.07)	16.12 (4.20~17)	18.17 (4.40~19.05)
Pdesignnc		kW	2.6	3,5	5.3	7.1	10.5	12.1	14.0	15.3
SEER		Energiklasse	6.3	6,8	6,5	6.3	6.7	6.1	6.1	6.1
SCOP		Energiklasse	4.1	4.1	4.1	4.1	4.0	4.0	4.0	4.0
Luftgennemstrøm	Max	m ³ /h	500/460/400	620/520/330	660/540/300	1247/1118/992	1700/1530/1300	1900/1750/1600	1900/1750/1600	2000/1850/1650
Lydniveau		dB(A)	52	55	59	59	63	65	66	66
Lydtryksniveau	Høj / Lav	dB(A)	37.0-26.0	42-25.5	44-25	45-27.5	51-40	52-40	53-39	53-40
Dimensioner	B x D x H	mm	715x640x295	715x640x295	715x640x295	830x830x205	830x830x245	830x830x287	830x830x287	830x830x287
Nettovægt/bruttovægt (indeenhed)		kg	14.6/17.5	16.1/18.8	16.2/19	21.6/25.4	27.2/31.2	29.3/33.5	29.3/33.5	29.3/33.5
Rumtemperatur	Køling Min / Max	°C	16~32	16~32	16~32	16~32	16~32	16~32	16~32	16~32
	Varme Min / Max	°C	0~30	0~30	0~30	0~30	0~30	0~30	0~30	0~30
Kabel (udeenhed)		mm ²	4G1.5	4G1.5	4G1.5	4G1.5	4G1.5	4G1.5	4G1.5	4G1.5

PANEL (TIL KASSETTE)		Enhed	60x60*	90x90**
Dimensioner	B x D x H	mm	620x620x50	950x950x55
Nettovægt/bruttovægt		kg	2.7/4.3	6/9

* Panel til Ceiling Cassette 26, 35, 53

** Panel til Ceiling Cassette 71, 105, 121, 140, 150

TEKNISK DATA

CEILING CASSETTE

UDEENHED		Enhed	Cassette 26	Cassette 35	Cassette 53	Cassette 71	Cassette 105	Cassette 121	Cassette 140	Cassette 150
Spænding		V, Hz	220-240V, 1Ph50Hz	220-240V, 1Ph50Hz	220-240V, 1Ph50Hz	380-415V, 3Ph50Hz	380-415V, 3Ph50Hz	220-240V, 1Ph50Hz	380-415V, 3Ph50Hz	380-415V, 3Ph50Hz
Anbefalet sikring		A	10	10	13	16	16	25	16	16
Tilsluttet effekt	Køling Min/Max	W	810 (140~1240)	1015 (160~1450)	1550 (720~2040)	2320 (780~2750)	4000 (890~4150)	4200 (680~4350)	4980 (810~6350)	5700 (1000~6250)
Tilsluttet effekt	Varme Min/Max	W	950 (120~1290)	1020 (125~1390)	1560 (700~1950)	1900 (610~2300)	3000 (780~4000)	3700 (750~4250)	4580 910~5900)	5700 1020~6350)
Luftstrøm (udendørs)		m³h	2200	2200	2100	3500	4000	4000	5600	5600
Kølemiddelrør (Væske/Gas)		Tommer	6.35mm(1/4in)/ 9.52mm(3/8in)	6.35mm(1/4in)/ 9.52mm(3/8in)	6.35mm(1/4in)/ 12.7mm(1/2in)	9.52mm(3/8in)/ 15.9mm(5/8in)	9.52mm(3/8in)/ 15.9mm(5/8in)	9.52mm(3/8in)/ 15.9mm(5/8in)	9.52mm(3/8in)/ 15.9mm(5/8in)	9.52mm(3/8in)/ 15.9mm(5/8in)
Kølemiddel (GWP)			675	675	675	675	675	675	675	675
Kølemiddel, mængde for 5 meter		kg	0.65	0.71	1.15	1.4	2.4	2.8	2.9	3.2
Kølemiddel, påfyldning pr. ekstra meter over 5 m		g/m	12	12	12	24	24	24	24	24
Maks. rørlængde		m	25	25	30	50	75	75	75	75
Maks. højdeforskel		m	10	10	20	25	30	30	30	30
Dimensioner	B x D x H	mm	765x303x555	765x303x555	805x330x554	890x342x673	946x410x810	946x410x810	980x415x975	980x415x975
Nettovægt/bruttovægt (udeenhed)		kg	24.6/27	26.6/29	32.5/35.2	41.9/45.2	75.5/80	71/75	90/105	92/107
Driftstemperatur	Køledrift Min/Max	°C	-15~-50	-15~-50	-15~-50	-15~-50	-15~-50	-15~-50	-15~-50	-15~-50
	Varmedrift Min/Max	°C	-20~-24	-20~-24	-20~-24	-20~-24	-20~-24	-20~-24	-20~-24	-20~-24
Kabel (udeenhed)		mm²	3G 1.5	3G 1.5	3G 1.5	5G 2.5	5G 2.5	3G 4.0	5G 2.5	5G 2.5

CEILING CASSETTE INDOOR 35
 CEILING CASSETTE OUTDOOR 35
 CEILING CASSETTE PANEL 35
 CEILING CASSETTE 35 KOMPLET


ITEM NO. 101144
 ITEM NO. 101145
 ITEM NO. 101142
 ITEM NO. 101147

EAN 5714652002989
 EAN 5714652002996
 EAN 5714652002965
 EAN 5714652003016

CEILING CASSETTE INDOOR 53
 CEILING CASSETTE OUTDOOR 53
 CEILING CASSETTE PANEL 53
 CEILING CASSETTE 53 KOMPLET

ITEM NO. 101140
 ITEM NO. 101141
 ITEM NO. 101142
 ITEM NO. 101143

EAN 5714652002941
 EAN 5714652002958
 EAN 5714652002965
 EAN 5714652002972

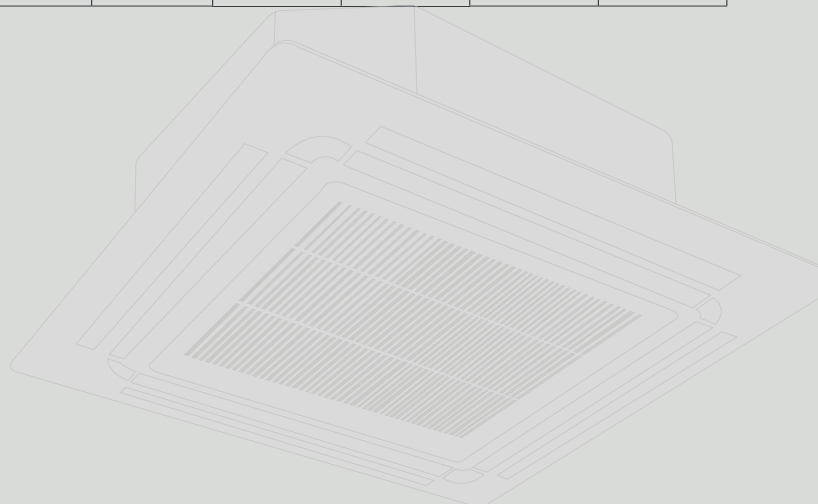

ANDERSEN ELECTRIC

KLIMABRANDS.DK/ANDERSEN-ELECTRIC