


DARK NIGHT LENS

579-004030829060

DARK NIGHT LENS 3 SD SURFACE MOUNTED CEILING LUMINAIRE made of aluminium, black, similar to RAL 9005, decor black lacquer, high-efficiently vacuum deposited aluminium reflector beam 36°, light output direct, UGR <16, with converter, max. 700mA, dimmability: not dimmable, IP20




DRAWING



TECHNICAL DETAILS

System perform. [W]	7
Bulb type	LED
Luminous flux [lm]	490
Current sec. [mA]	700
Colour temp. [K]	3000K
CRI	>90
UGR	<16
Optics	vacuum deposited aluminium reflector
Converter	with converter
Dimming	not dimmable
Light output	direct
Beam angle [°]	36°
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	111
Width [mm]	40
Height [mm]	95
IP protection class	IP20
Voltage class	protection cl. I
Shock resistance	IK06
Net weight [kg]	0,58
Colour lamp	black
RAL	9005
Colour decor	black lacquer
EAN-Number	9010506247541
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	F
No. of luminaires B16A	27

LIGHT DISTRIBUTION CURVE

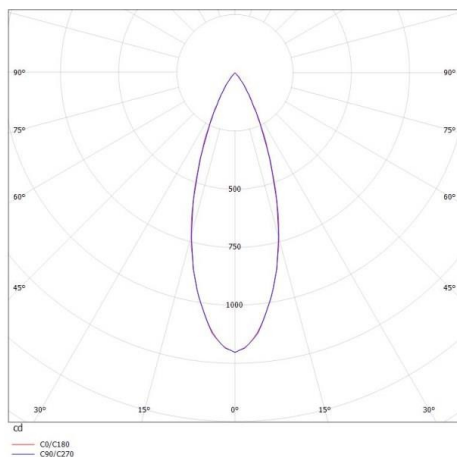

energy label



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.