



491 W. Garfield Ave., Coldwater, MI 49036

Phone: 517-279-2135

Web/live chat: www.bds-suspension.com

E-mail: tech-bds@ridefox.com

Part#: 011201, 121201

2" Suspension System

2002-2008 Chevy Trailblazer/GMC Envoy

READ AND UNDERSTAND ALL INSTRUCTIONS AND WARNINGS PRIOR TO INSTALLATION OF SYSTEM AND OPERATION OF VEHICLE.

SAFETY WARNING BDS Suspension Co. recommends this system be installed by a professional technician. In addition to these instructions, professional knowledge of disassembly/ reassembly procedures and post installation checks must be known.

PRODUCT SAFETY WARNING Certain BDS Suspension products are intended to improve off-road performance. Modifying your vehicle for off-road use may result in the vehicle handling differently than a factory equipped vehicle. Extreme care must be used to prevent loss of control or vehicle rollover. Failure to drive your modified vehicle safely may result in serious injury or death. BDS Suspension Co. does not recommend the combined use of suspension lifts, body lifts, or other lifting devices.

You should never operate your modified vehicle under the influence of alcohol or drugs. Always drive your modified vehicle at reduced speeds to ensure your ability to control your vehicle under all driving conditions. Always wear your seat belt.

PRE-INSTALLATION NOTES

1. Special literature required: OE Service Manual for model/year of vehicle. Refer to manual for proper disassembly/reassembly procedures of OE and related components.
2. Adhere to recommendations when replacement fasteners, retainers and keepers are called out in the OE manual.
3. Larger rim and tire combinations may increase leverage on suspension, steering, and related components. When selecting combinations larger than OE, consider the additional stress you could be inducing on the OE and related components.
4. Post suspension system vehicles may experience drive line vibrations. Angles may require tuning, slider on shaft may require replacement, shafts may need to be lengthened or trued, and U-joints may need to be replaced.
5. Secure and properly block vehicle prior to installation of BDS Suspension components. Always wear safety glasses when using power tools.
6. If installation is to be performed without a hoist, BDS Suspension Co. recommends rear alterations first.
7. Due to payload options and initial ride height variances, the amount of lift is a base figure. Final ride height dimensions may vary in accordance to original vehicle attitude. Always measure the attitude prior to beginning installation.

POST-INSTALLATION WARNINGS

1. Check all fasteners for proper torque. Check to ensure for adequate clearance between all rotating, mobile, fixed, and heated members. Verify clearance between exhaust and brake lines, fuel lines, fuel tank, floor boards and wiring harness. Check steering gear for clearance. Test and inspect brake system.
2. Perform steering sweep to ensure front brake hoses have adequate slack and do not contact any rotating, mobile or heated members. Inspect rear brake hoses at full extension for adequate slack. Failure to perform hose check/ replacement may result in component failure. Longer replacement hoses, if needed can be purchased from a local parts supplier.
3. Perform head light check and adjustment.
4. Re-torque all fasteners after 500 miles. Always inspect fasteners and components during routine servicing.

PARTS LIST

Part #	Qty	Description
02171	2	Front Strut Spacer
02172	2	Rear Coil Spacer (#011201 Only)
SB14BK	4	Stem Bushing
117300007	4	Stem Washer
87	2	Strut Sleeve
528	1	Bolt Pack
	2	10mm-1.50 x 30mm bolt
	6	10mm-1.50 lock nut
	8	3/8" USS flat washer
	6	5/16"-18 x 1" bolt



INSTALLATION INSTRUCTIONS

FRONT INSTALLATION (#011201, 121201)

1. Park the vehicle on a clean, flat surface and block the rear wheels for safety.
2. Raise the front of the vehicle and support the frame with jack stands behind the lower control arms.
3. Remove the front wheels.
4. Disconnect the sway bar from the frame (2 bolts per side). Allow the sway bar to hang down. Retain sway bar mounting bolts.

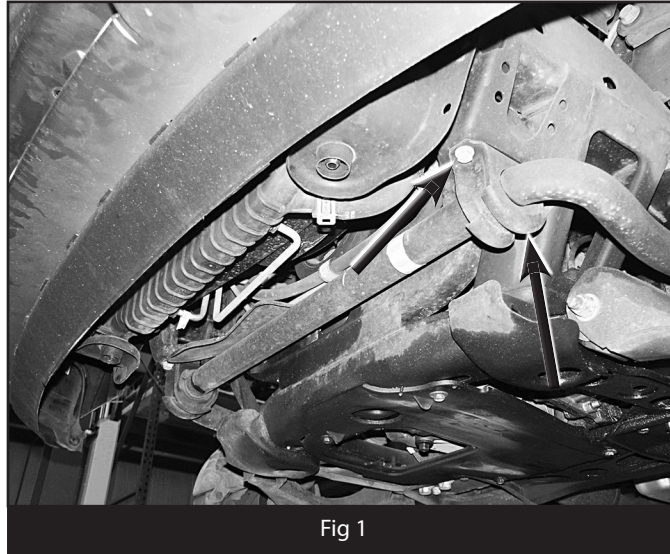


Fig 1

5. Under the hood, locate the driver's and passenger's top strut mounting nuts (Fig. 2). Remove the two nuts that hold each strut to the frame. CAUTION: DO NOT remove the center strut nut. It is under extreme pressure.

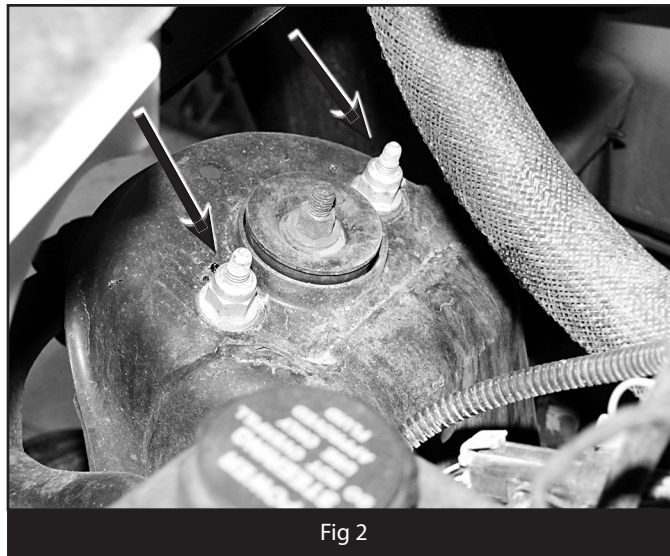


Fig 2

Perform the following steps one side at a time, starting with the passenger's side.

6. Remove the nut that mounts the strut to the lower control arm (Fig. 3). Retain nut.
7. Using a pitman arm puller or equivalent, remove the strut from the tapered mounting stud. Note: If a puller is not available, taper can be freed by striking with a hammer while prying out on the strut mount. (Fig. 4)

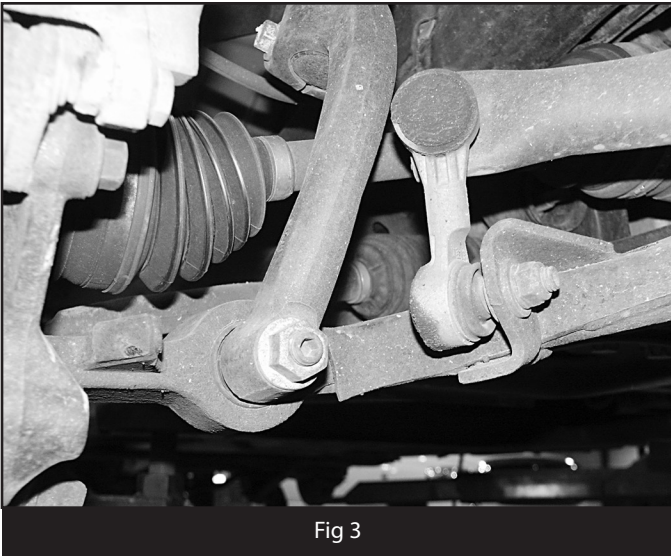


Fig 3

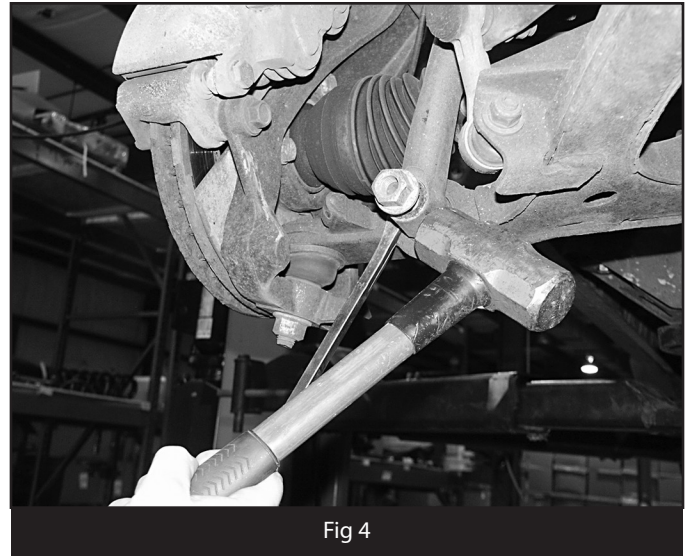


Fig 4

8. Remove the strut from the vehicle.
9. Mark the relationships between the top strut plate, coil spring, coil spring mount and strut (Fig. 5). Also mark what side of the strut faces out. The mark on the top plate will need to be transferred to the new top plate provided to ensure the strut is reassemble correctly for proper alignment during installation.




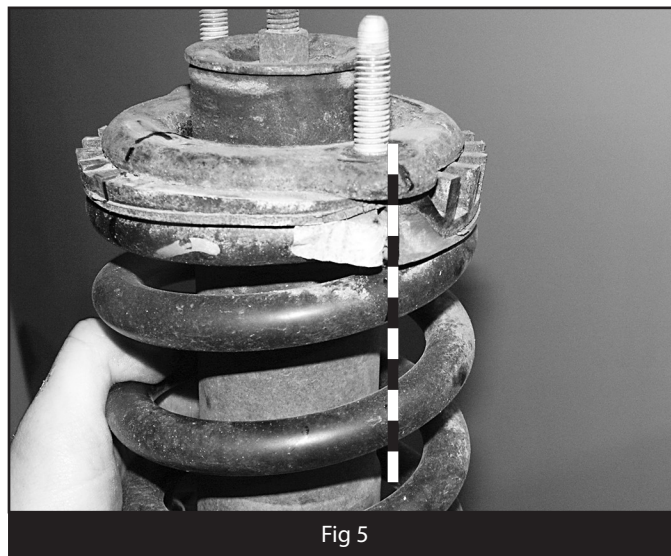


Fig 5

- ⚠ Note:** A high-quality wall mounted coil spring compressor (Branick or equivalent) is recommended for the installation. A rod style compressor is sufficient, but use extreme caution and inspect all components for signs of wear and/or fatigue before each use.
10. Compress the spring enough to relieve pressure from the strut rod nut. Remove the nut and remove the top washer, strut plate, rubber/plastic isolator and lower washer.
 11. Transfer the mark on the OE top strut plate to the new one. The new strut plate has a third mounting hole in it that will face the outside of the vehicle. Install the OE isolator on the new strut plate by lining up the alignment marks.
 12. Install one of the provided stem washers (117300007) and stem bushing (SB14BK) with sleeve (87-1). The protruding sleeve should be opposite of the stem washer. (Fig. 6a / 6b)

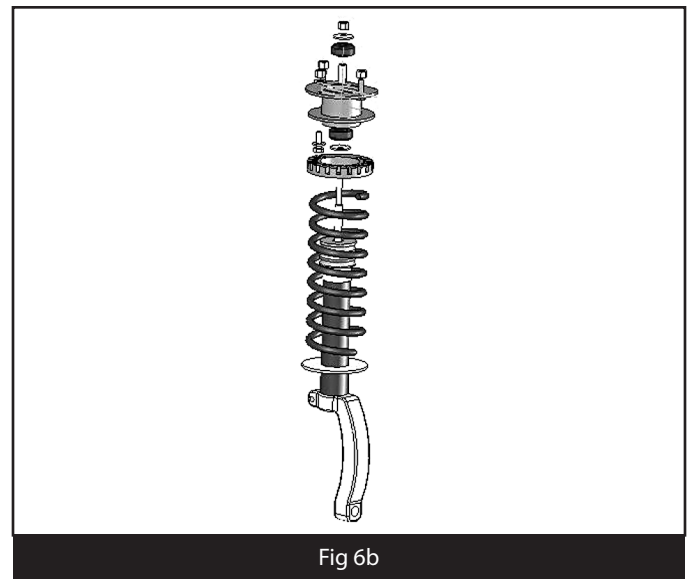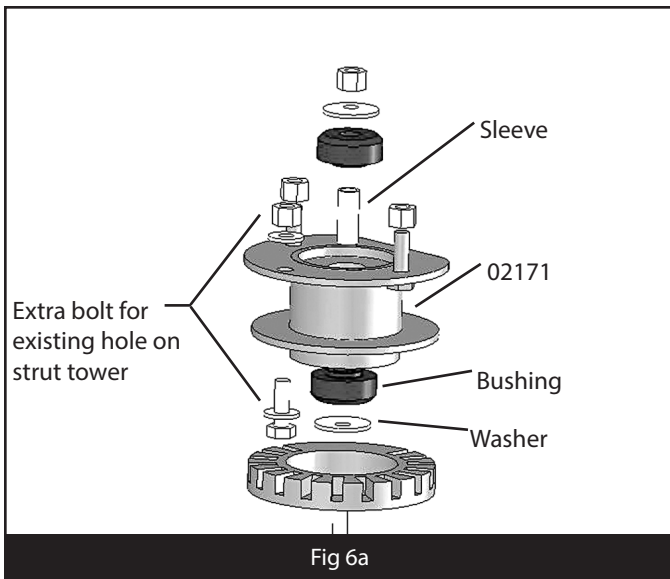


13. Install the new strut plate/isolator (02171) on the strut and compress the spring enough to install a second bushing and stem washer. Retain the assembly with the OE nut and tighten until the bushings deform. Note: The bushings should deform to the point when the center crush sleeve bottoms out.
14. Release the spring compressor.
15. Install the modified strut assembly in the vehicle by aligning the studs in the top plate with the original mounting holes. The third hole in the plate will align with an existing hole in the frame. Fasten the strut to the frame with 10mm nuts and 3/8" USS washers on the two studs (Fig. 7). Leave hardware loose.

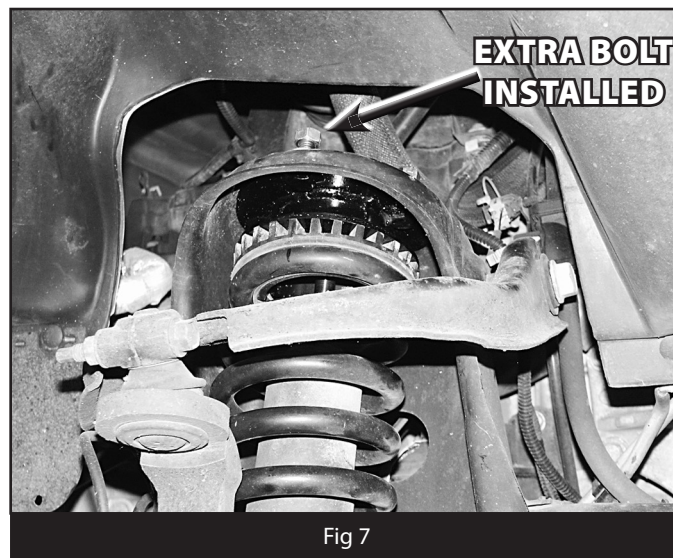

16. Install a 10mm x 30mm bolt, nut and 3/8" USS washers in the third hole (Bolt pack #528). Leave hardware loose.
17. Install the strut on the lower control arm tapered mounting stud and fasten with the OE nut. Snug nut but do not tighten. Final torque will be done with weight of the vehicle on the suspension.
18. Torque the upper 10mm hardware to 35 ft-lbs.
19. Repeat procedure on the driver's side.
20. With both sides complete, reattach the sway bar to the frame with the OE hardware. Torque bolts to 40 ft-lbs.
21. Install the wheels and lower the vehicle to the ground.
22. Bounce the front of the vehicle to settle the suspension. Torque the lower strut mount nuts to 80 ft-lbs.
23. Check all hardware for proper torque. If installing a #121201 "front only" kit there will be left over hardware provided with the kit.
24. Check hardware after 500 miles.


REAR INSTALLATION (#011201 ONLY)

25. Block the front wheels for safety.
26. Disconnect the rear track bar from the driver's side of the axle. Retain hardware. (Fig. 8)
27. Raise the rear of the vehicle and support the frame with jack stands in front of the lower control arms.
28. Remove the wheels.
29. Support the rear axle with a hydraulic jack.
30. Remove the OE rear shocks. Retain shock hardware. (Fig. 8)

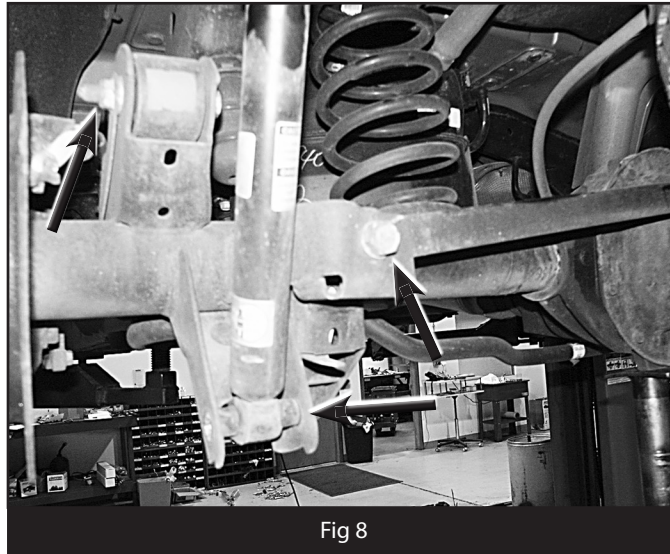


Perform the follow steps on one side at a time, starting with the passenger's side.

31. Disconnect the upper control arm from the axle. Retain hardware. (Fig. 8)
32. Lower the axle and remove the coil spring and upper rubber isolator. (Fig. 9)

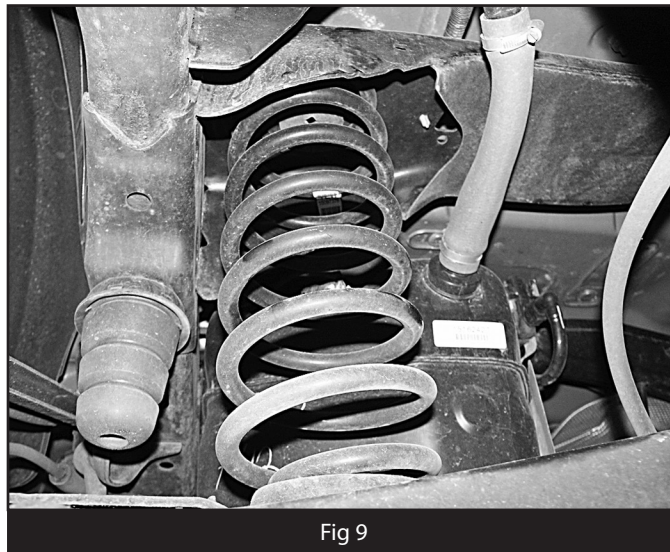

33. Apply thread locker to the threads of three 5/16" x 1" bolts (Bolt pack #528) and thread them into the provided coil spring spacer so that 1/4" of thread is still showing. (Fig. 10)

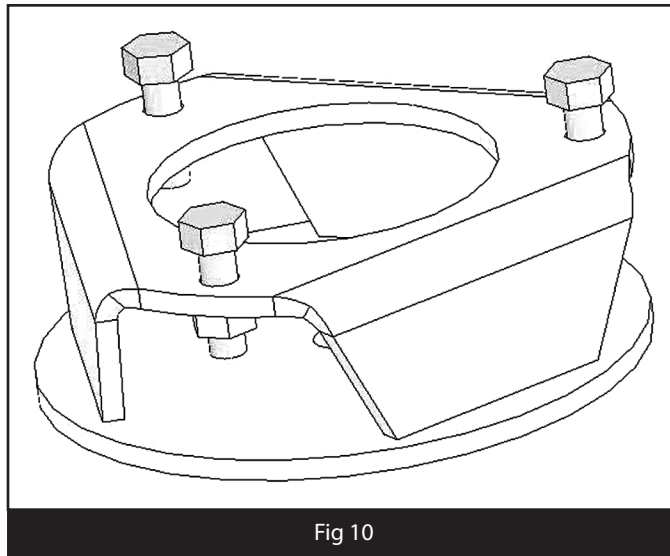

34. Install the coil spring spacer (02172) in the vehicle by aligning the 5/16" bolt heads with the slots in the frame coil mount. Once the bolt heads are in the slots, turn the spacer to lock it in place. Note: The spacer will be loose in the mount. The bolts are only there to hold the spacer in position while installing the coil spring.
35. Install the OE rubber isolator and coil spring in the vehicle. Take care not to over-extend any brake lines.
36. Raise the axle to compress the coil spring enough to reattach the upper control arm to the axle. Fasten the control arm with the original hardware. Leave hardware loose.
37. Repeat procedure on the driver's side of the vehicle.
38. With both sides complete, install the new BDS shocks with the provided bushings, sleeves and OE hardware. Torque hardware to 55 ft-lbs.
39. Install the wheels and lower the vehicle to the ground.
40. Bounce the rear of the vehicle to settle the suspension. Install the track bar in the axle mount with the OE hardware. Torque to 125 ft-lbs.
41. Torque the upper control arm bolts to 95 ft-lbs.
42. Check all hardware for proper torque.
43. Check hardware after 500 miles.
44. A complete front end alignment is necessary.

NOTICE TO DEALER/INSTALLER

These instructions, the warning card, and included decals must be given to the owner of this BDS Suspension product.

For questions, technical support and warranty issues relating to this BDS Suspension product, please contact your distributor/installer before contacting BDS Suspension directly.

Sold/Installed by: