



Sapphire Total Lite™

HIGH DEXTERITY FULLY COATED NITRILE MEDIUM CUT RESISTANT GLOVE

A great fitting, fully coated glove combining medium cut and excellent grip in oily and wet conditions. Ideal for oily tasks with sharp parts that require great grip.

FEATURES

- › Cut resistance: level C (EN388:2016) / ANSI A3
- › 18g liner make a thin and dexterous glove offering great dexterity
- › Fully coated to protect the hand from oils, hydrocarbons, grease and abrasion, with optimal long lasting grip
- › Extremely comfortable and great fitting
- › Water repellent for working in damp or oily environments
- › Contact heat protection up to 100°C / 212°F for a short period (15 sec max)
- › Designed for easy movement and continuous wear
- › No irritation by seams in contact with the skin
- › Elasticated wrist provides a secure fit



SUITABLE FOR

Typical Industries

- Automotive
- Construction
- Public Works
- Transportation
- Waste Management
- Oil and Gas
- Manufacturing

Suitable Applications

- Pipe Handling
- Sharp and Oily Parts Handling
- Concreting
- Oil Submersion
- Wet Work

CERTIFICATION



See overleaf for explanation



Sapphire Total Lite™

PRODUCTION INFORMATION

MATERIALS	LINER:	18 gauge HPPE, glass fibre, nylon, spandex
	COATING:	Double coated sandy finish nitrile over nitrile
COLOUR	Orange/Black	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

ORDERING DETAILS

SIZE	CODE	PACKAGING
6/XS	SKG00105BB	10 pairs per paper wrap
7/S	SKG00105BD	
8/M	SKG00105BF	
9/L	SKG00105BH	
10/XL	SKG00105BJ	120 pairs per case
11/XXL	SKG00105BL	


RECOMMENDATIONS FOR USE

- **USE:** General handling glove with cut protection. Not suitable for thermal, electrical and chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*

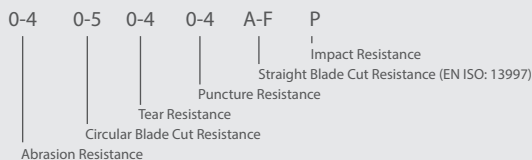


*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



HEAT AND FIRE EN 407

PERFORMANCE LEVELS

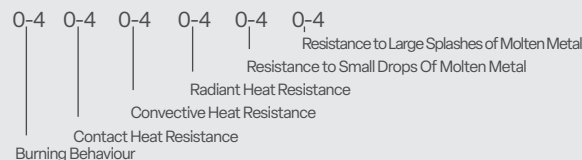

CLASSIFICATION FOR CUT RESISTANCE	
Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

ANSI/ISEA 105-2016 ABRASION RATING CHART							
Abrasion Level Rating	0	1	2	3	4	5	6
Gram Load	500	500	500	500	1000	1000	1000
Abrasion Cycles to Fail	<100	≥100	≥500	≥1,000	≥3,000	≥10,000	≥20,000

ANSI/ISEA PUNCTURE RESISTANCE	
ANSI Puncture Level	Puncture Resistance (newtons)
1	10-19
2	20-59
3	60-99
4	100-149
5	150+

Puncture Resistance (ANSI/ISEA 105): Puncture resistance is determined by the max force that it takes, exerted from a probe, to puncture the fabric.

GLOBUS

EUROPE

www.globusgroup.com

E: sales@globus.co.uk

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

MIDDLE EAST & AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com

T: +971 4 882 9962

F: +971 4 882 9963

GLOBUS AMERICAS

www.globusgroup.com

E: americas@globusgroup.com

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

©2023 Globus (Shetland) Ltd | SKYTEC-Datasheet-SAPP-TOTAL-LITE-1123

EU Type-Examination Certificate issued by CCQS Certification Services Limited, Block 1 Blanchardstown Corporate Park, Ballycoolin Road, Blanchardstown, Dublin, D15 AKK1, Ireland (Notified Body No 2834)

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.