HAVWOODS

Technical Data Sheet

Version 1.2

HW31006

Bayonne

PurePanel

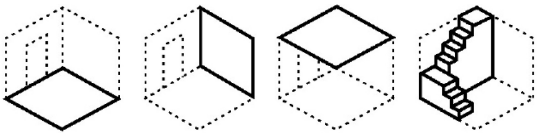

Specification

Pattern	Veneered panel
Construction	Composite MDF
Top Layer Specie	European oak veneer (Quercus spp.)
Surface Process	Brushed & stained
Finish	Matt lacquered
Connection System	PAR
Edge Profile	Square edge
Backing	MDF (Reconstitued veneer)
Wear Layer Thickness	0.6mm
Total Thickness	19mm
Width	1220mm
Length	3050mm
Pack Size	3.78m²
Grade	Mix match quarter sawn

FSC
www.fsc.org
FSC® C009500
The mark of responsible forestry

Key

* Subject to compatible subfloor and correct installation (see Installation Guidelines) including sensors.

Installation Methods

Fully Bonded	Yes*
Nailed/Screwed	No

All Havwoods floor must be installed by a competent installer who will have the necessary skills and take individual site circumstances into account. Havwoods warranty will apply only to floors which have been installed by a competent flooring installer comparable to BS8201 in the UK or equivalent standards worldwide.

Grading Criteria

Mix-match production technique ensures each panel is consistent in colour and quality without compromising the solid panel aesthetic. This is accomplished by merging veneers selectively sourced from different trees with various slicing techniques. Quater-sawing produces planks with straighter, more uniform grain patterns and greater stability compared to standard plain-sawn timber.

N.B. The product grading criteria is inspected at each mill visually and should be taken as an approximation only. To allow for unavoidable variations in the material characteristics, 3% of materials may vary from the stated range.

Technical Criteria

Origin	Europe
Certification	FSC® Certified (FSC-C009500)
Formaldehyde Emissions	E1 (EN 717-1/2)
Pentachlorophenol Emissions	PCP Free
Reaction to Fire Classification	D-s1-d0 (EN 13501-1)
Thermal Conductivity	0.11 W/m K

HAVWOODS

For More Information

Contact Our Experienced Team:

Tel: +44 (0)1524 737 000 | Fax: +44 (0)1524 737 001
Email: info@havwoods.com

Comprehensive maintenance instructions and materials are available from Havwoods for all floors.

This technical data sheet was written by Havwoods International. At the time of writing and publication, all information is specified correctly. The company reserves the right to change the specifications of this product at any time without prior notice to third parties. The photographs used in this document are intended only as illustrations. No rights can be derived from them.

Carnforth Business Park, Oakwood Way, Carnforth, Lancaster LA5 9FD
+44 (0)1524 737 000 | info@havwoods.com | www.havwoods.com

21-SEPTEMBER-2026/INT