


DON-JO MFG., INC.

ARCHITECTURAL HARDWARE & ACCESSORIES

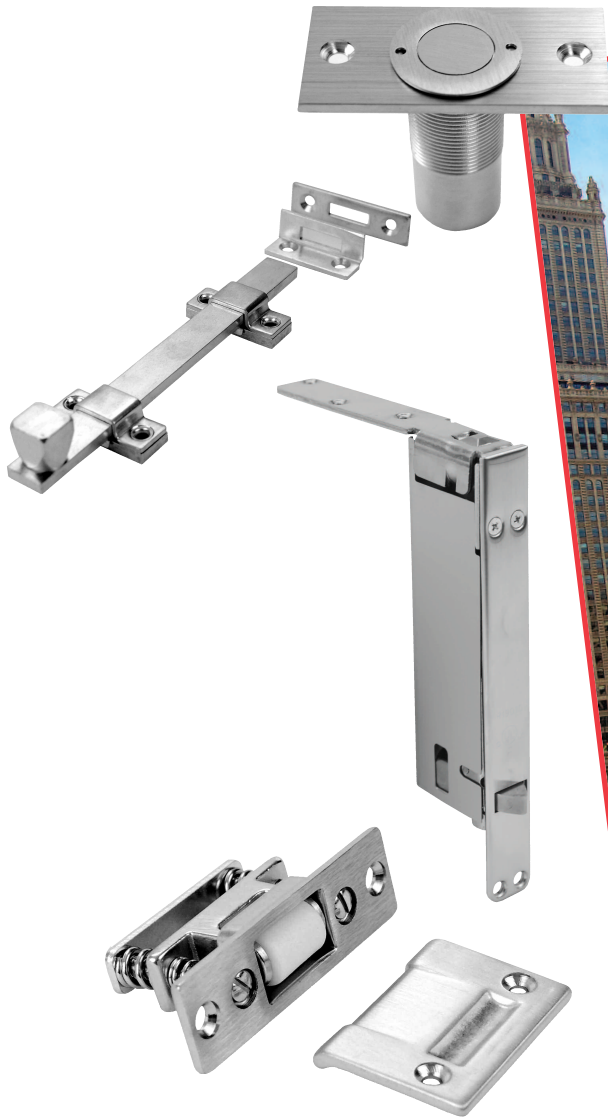

Chicago, Illinois

BOLTS & LATCHES

INDEX

Item #	Page #	Item #	Page #	Item #	Page #	Item #	Page #
1550	2d	1580	5d	1640R	2d	1722	4d
1551	2d	1581	5d	1700	3d	1724	4d
1555	1d	1582	5d	1702	3d	RB-50	2d
1557	1d	1630	6d	1704	3d	RG-50	2d
1560	1d	1632	6d	1710	3d	SB-2	6d
1562	2d	1634	6d	1712	4d	SB-3	6d
1570	3d	1636	6d	1714	4d	SB-4	6d
1572	3d	1638	6d	1716	4d	SB-6	6d
1573	3d	1639	6d	1718	4d	SB-12	6d
1578	5d	1640	2d	1720	4d		

FLUSH BOLTS



I555
Metal Doors



I557
Wood Doors

NUMBER	SIZE	ANSI A156.16	MATERIAL
I555	Face Plate: 1" x 6 3/4"	L14251	Cast Brass
	Strike: 15/16" x 2 1/4"		
	Guide: 1" x 2"		
I557	Face Plate: 1" x 6 3/4"	L04261	Cast Brass
	Strike: 15/16" x 2 1/4"		

SHELF PACK: 10

Box Pack

FASTENERS: (I555) 4 ea. #8 x 1 1/2" Combo Screw, 4 ea. #8 x 3/4" Combo Screw
(I557) 7 ea. #8 x 3/4" Combo Screw

FEATURES: (I555) • Fits ANSI Door & Frame Prep.

- 3/4" Bolt Throw, 3/4" Rod Backset
- 12" Rod length
- 1 1/2" Adjustable Bolt Head

FEATURES: (I557) • 3/4" Bolt Throw, 3/4" Backset

- Door strength maintained by corner reinforcement plate

FINISHES: 605, 606, 612, 613, 625, 626

OPTIONS: (I555) Longer rod options available
Works w/I570 Dust Proof Strike

AUTOMATIC FLUSH BOLTS



I560
Metal Doors



NUMBER	SIZE	ANSI A156.3	MATERIAL
I560	Face Plate: 1" x 6 3/4"	Type 25	Brass
	Strike: 15/16" x 2 1/4"		Cast Brass
	Guide: 1" x 1 7/8"		Cast Brass
	Door Strike: 1 3/4" x 1 3/4"		Cast Brass

SHELF PACK: 10

Box Pack

FASTENERS: 8 ea. #8 x 3/4" Combo Screw, 2 ea. #8 x 3/8" MS

- FEATURES:**
- Non handed
 - Conforms to UL, IOC and UBC 7-2-1997
 - For Fire Rated Metal Doors labeled A, B, C, D & E
 - Sold in pairs
 - Fits standard ANSI prep for metal doors
 - Requires only 5 lbs. of force meeting ADA regulations
 - 1" vertical adjustment for bolts

FINISHES: 605, 613, 626

OPTION: Works w/I570 Dust Proof Strike

AUTOMATIC FLUSH BOLT



I562
Wood Doors

NUMBER	SIZE	ANSI A156.3	MATERIAL
I562	Face Plate: 1" x 8 1/2"	Type 25	Cast Brass
	Frame Strike: 15/16" x 2 1/4"		
	Guide: 1" x 6 1/16"		
	Door Strike: 1 1/4" x 1 3/4"		

SHELF PACK: 10

Box Pack

FASTENERS: 6 ea. #8 x 3/4" Combo Screw, 2 ea. #8 x 3/8" MS, 3 ea. #10 x 1" SMS

- FEATURES:**
- Non handed
 - Conforms to UL, IOC and UBC 7-2-1997
 - For Fire Rated Wood Doors labelled B, C, D & E
 - Sold in pairs
 - Fits standard ANSI prep for wood doors
 - Requires only 5 lbs. of force meeting ADA regulations
 - Bolt has 3/4 vertical adjustments

FINISHES: 605, 613, 626

OPTION: Works w/I570 Dust Proof Strike

FLUSH BOLTS



I640



I640R

NUMBER	SIZE	ANSI A156.16	MATERIAL
I640	Face Plate: 3/4" x 6"	L04201	Cast Brass
	Strike: 15/16" x 2"		
I640R	Face Plate: 3/4" x 6"	L04201	Cast Brass
	Strike: 15/16" x 2"		

SHELF PACK: 10

Box Pack

FASTENERS: 4 ea. #6 x 3/4" SMS

- FEATURES:**
- 1" bolt throw
 - 1/2" diameter bolt
 - For wood doors only!
 - (I640R) 3/8" Radius End

FINISHES: 605, 609, 613, 619, 620, 626

ALUMINUM DOOR FLUSH BOLTS




I550



I551



RB-50



RG-50

NUMBER	DIMENSIONS	OFFSET
I550	15/16" x 4 1/4" Radius End	1/8"
I551		1/4"
RB-50	-	-
RG-50	-	-

SHELF PACK: 4

Box Pack

FASTENERS: (I550, I551) 3 ea. #8-32 x 1/2" MS
(RG50) 2 ea. #8-32 x 1/2" MS

FINISHES: SL, DU


DUST PROOF STRIKES



I570



I572



I573

NUMBER	DIMENSIONS	ANSI A156.16	MATERIAL
I570	2 7/8" x 2 1/4"	L2402 I	Cast Brass
I572	15/16" Dia. x 2" Depth	L2402 I	Cast Brass
I573	2 7/8" x 2 1/4"	L2402 I	Cast Brass

SHELF PACK: 10

Polybagged

FASTENERS: (I570, I573) 2 ea. #8 x 1" SMS, 2 ea. Plastic Anchor

FEATURE: (I573) Can be locked closed

FINISHES: 605, 612, 613, 625, 626

(I573) 605, 613, 626

ROLLER LATCHES




I700



I702



I704



I710

NUMBER	SIZE	ANSI A156.16	MATERIAL
I700	Body: 3 3/8" x 1"	E1909I	Cast Brass
	Strike: 1 11/16" x 2 1/4"		
I702	Body: 3 3/8" x 1"	-	Cast Brass
	Strike: 1 1/8" x 2 3/4"		
I704	Body: 3 3/8" x 1"	E1909I	Cast Brass
	Strike: 1 1/4" x 4 7/8"		
I710	Body: 2 1/4" x 7/8"	L17802	Cast Brass
	Strike: 2 1/4" x 1 3/4"		

SHELF PACK: 10

Polybagged

FASTENERS: (I700, I702) 2 ea. #8 x 1" SMS, 2 ea. #8-32 x 3/4" MS, 2 ea. #10 x 1 1/2" SMS

(I704) 2 ea. #12-24 x 1/2" MS, 2 ea. #12 x 3/4" SMS, 2 ea. #10 x 1 1/2" SMS


(I710) 4 ea. #8 x 1" SMS

FEATURES: • Solid nylon roller for silent operation

• Adjustable roller latch

FINISHES: 605, 613, 619, 620, 626

BALL LATCHES



1716

NUMBER	LATCH DIMENSIONS	STRIKE	MATERIAL
1712	2 1/8" x 1"	2 1/8" x 1" / 2 1/8" x 1 3/8"	Cast Brass
1714	2 1/4" x 1"	2 1/8" x 1 13/32"	Cast Aluminum
1716	1"	2 1/4" x 1 13/32"	Cast Brass

SHELF PACK: 20

Polybagged

FASTENERS: (1712) 6 ea. #6 x 5/8" SMS

(1714) 4 ea. #8 x 3/4" SMS

(1716) 2 ea. #8 x 3/4" SMS

FEATURES: (1712) Packed with narrow & wide strikes / Adjustable height

(1714) Packed with full lip R/C strike


(1716) Drive In latch

FINISHES: (1712) 605, 613, 619, 620, 626

(1714) 605, 609, 613, 619, 620

(1716) 605, 609, 613, 619, 620, 626

FRICTION CATCH



NUMBER	SIZE			ANSI A156.16	MATERIAL
1718	Height	Wide	Depth	B13302	Cast Brass
	Body: 1 7/8"	3/8"	7/16"		
	Strike: 1 1/8"	3/8"	7/16"		


SHELF PACK: 20

Polybagged

FASTENERS: 4 ea. #5 x 1/2" SMS

FINISHES: 605, 609, 613, 619, 620, 625, 626

MAGNETIC CATCHES

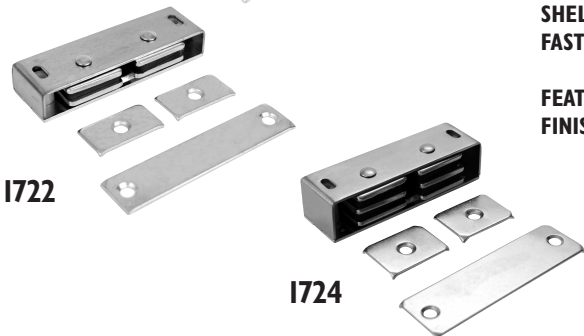

1724

NUMBER	DIMENSIONS	LOAD CAPACITY	ANSI A156.16	MATERIAL
1720	2 1/16" x 1 1/8" x 5/8"	5 lbs.	-	Brass
1722	3 1/8" x 1" x 9/16"	9 lbs.	B43161	Brass
1724	3 1/8" x 1" x 3/4"	14 lbs.	B43161	Brass

SHELF PACK: 10

Polybagged


FASTENERS: (1720) 3 ea. #6 x 5/8" SMS

(1722, 1724) 2 ea. #6 x 1 1/4" WS, 2 ea. #6 x 5/8" SMS

FEATURES: (1722, 1724) packaged w/multiple strikes

FINISHES: 605, 626

SURFACE BOLTS—UL RATED



NUMBER	BOLT LENGTH	ANSI A156.16	MATERIAL
1578	8"	L84161	Solid Brass
1580	8"	L84161	Solid Brass
1581	12"	L84161	Solid Brass

SHELF PACK: 10

Polybagged


FASTENERS: (1578) 5 ea. #10 x 1" MS, 5 ea. #10 x 1 1/4" SMS, 2 ea. Plastic Anchors
(1580, 1581) 8 ea. #12-24 x 1" MS, 8 ea. #12 x 1 1/4" SMS

FEATURES: • Furnished with Rim and Mortise strikes
• (1580, 1581) 1 1/8 bolt throw, 1/4" x 3/4" size
• (1578) Concealed screw mount

FINISHES: (1578) 626
(1580) 605, 613, 626
(1581) 626

OPTION: Sex bolt available

SURFACE BOLTS

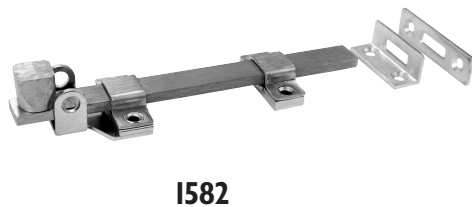

NUMBER	BOLT LENGTH	THROW	MATERIAL
1582	8"	1"	Stainless Steel

SHELF PACK: 10

Polybagged

FASTENERS: 6 ea. #10-24 x 1" MS, 6 ea. #10 x 1 1/4" SMS


FEATURES: • 1/4" x 3/4" bolt size
• Furnished with rim and mortise strikes
• Padlock not included

FINISH: 626, 630



DON-JO MFG., INC.

SLIDE BOLTS



NUMBER	DIMENSIONS	ANSI A156.16	MATERIAL
SB-2	5/8" x 2"	L04151	Solid Brass
SB-3	5/8" x 3"	L04151	Solid Brass
SB-4	5/8" x 4"	L04151	Solid Brass
SB-6	5/8" x 6"	L04151	Solid Brass
SB-12	5/8" x 12"	L04151	Solid Brass

SHELF PACK: 10 **Polybagged**
FASTENERS: 6 ea. #6 x 3/4" SMS
FINISHES: (SB-2, SB-3) 605, 613, 619, 620, 625, 626
 (SB-4, SB-6, SB-12) 605, 613, 619, 620, 625, 626
FEATURES: Furnished with rim, mortise strikes

DUTCH DOOR BOLTS



1630 1636
1632 1638
1634 1639

NUMBER	DIMENSIONS	BOLT	MATERIAL
1630	4 1/2" x 1 5/8"	5/8" Half Round	Solid Brass
1632	8" x 1 5/8"	5/8" Half Round	Solid Brass
1634	12" x 1 5/8"	5/8" Half Round	Solid Brass
1636	18" x 1 5/8"	5/8" Half Round	Solid Brass
1638	24" x 1 5/8"	5/8" Half Round	Solid Brass
1639	36" x 1 5/8"	5/8" Half Round	Solid Brass

SHELF PACK: 10 **Polybagged**
FASTENERS: (1630) 8 ea. #6 x 1" SMS
 (1632, 1634, 1636, 1638, 1639) 11 ea. #6 x 1" SMS
FEATURES: • Furnished w/rim, mortise & t-strikes
 • 1" dia. knob
FINISHES: 605, 613, 619, 620, 625, 626



WOOLF DISTRIBUTING

www.woolfdistributing.com

GREEN BAY, WI

551 Packerland Dr.
1-920-499-2117

Email: woolf gb@woolfdistributing.com
 Orders: order-gb@woolfdistributing.com

PEORIA, IL

515 South Maxwell Rd.
1-309-697-1760

Email: woolf pe@woolfdistributing.com
 Orders: order-pe@woolfdistributing.com

WOODSTOCK, IL

1625 West Lake Shore Dr.
woolf-ws@woolfdistributing.com

Building Materials: 1-815-477-9680
 order-ws@woolfdistributing.com
 Millwork: 1-815-356-0438
 order-mw@woolfdistributing.com
 Commercial: 1-815-527-9288
 commercialdoors@woolfdistributing.com