

Sandwich Preparation Benches - Straight Glass

W.SMS.xx





Product Information:

- Refrigerated blown air cold well with under-counter refrigeration
- Features air vents blowing a cold air blanket over the cold well
- Designed to operate at ambient temperatures up to 32°C
- Adjustable digital controller designed to hold temperature accurately between 2°C and 5°C
- Unique full-length back mounted evaporator coil
- Double glazed, toughened straight glass gantry (flat deck supplied with acrylic well covers as standard)
- Rear toughened glass doors to gantry as standard
- Exterior & interior made from food grade stainless steel
- Undermount refrigeration unit with in built heated evaporator tray - no drain connection required
- Undercounter fridge doors are stainless steel self-closing with magnetic gaskets
- Undercounter fridge supplied with 2 plastic coated zinc-plated steel shelves per door
- Supplied on 130mm removable castors for ease of cleaning or plinth mounting
- Supplied as standard with 1/3 100mm deep gastronorm pans and support bars to suit
- Other pan sizes and combinations available
- Wide range of functional accessories available
- **12 months on-site parts and labour warranty**

Specifications

Model	W.SMS.914	W.SMS.1330	W.SMS.1885	W.SMS.2286
Height	1380mm	1380mm	1380mm	1380mm
Width	914mm	1330mm	1885mm	2286mm
Depth	810mm	810mm	810mm	810mm
Power	0.72kW (10A plug & lead fitted)	0.72kW (10A plug & lead fitted)	1.2kW (10A plug & lead fitted)	1.2kW (10A plug & lead fitted)
Gas	R404A	R404A	R404A	R404A
GN Capacity	4 x 1/3 GN pans	7 x 1/3 GN pans	10 x 1/3 GN pans	12 x 1/3 GN pans

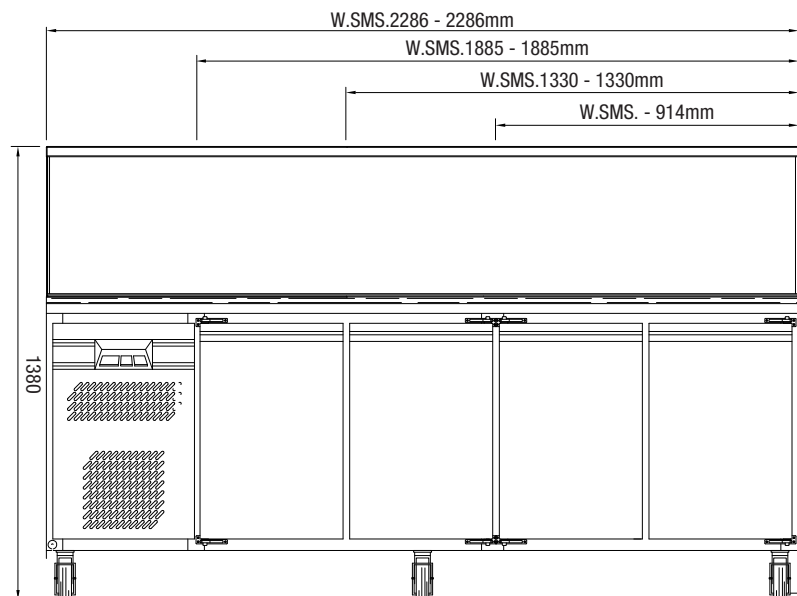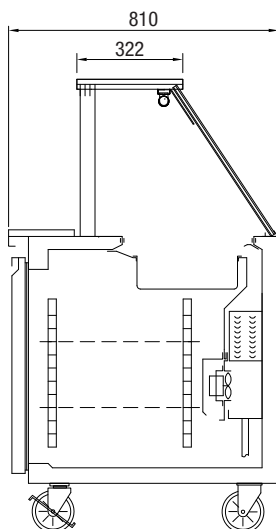

Due to continuous product research and development, the information contained herein is subject to change without notice.

Revision: 24/06/2020

www.stoddart.com.au

www.stoddart.co.nz