



# Refrigerated Undercounter 4 Door - 1/1GN

#### **Product Information:**

- Monoblock refrigeration system, for improved performance and ease of servicing
- Adjustable digital temperature controller (0°C 6°C)
- Fan forced ducted cooling for uniformed performance throughout the entire refrigerator
- Protective coating on refrigeration coil to help prevent corrosion
- Environmentally friendly R290 Hydrocarbon refrigerant
- Efficient LED lighting for increased product visibility
- · Stainless Steel worktop as standard
- 1/1GN shelf configuration with adjustable runners
- 60mm CFC free polyurethane insulation
- Efficient and hygienic cleaning made easy with an innovative internal design
- High quality components including highly efficient compressors and EC fans
- · Self-closing, lockable doors
- Supplied on standard and lockable castors for a 840mm finish height. Optional spacer to increase to 900mm working height
- 2 and 3 door models also available, with glass or solid doors



## Designed and Engineered in Australia to meet Australian Standards 24 Months on-site parts and labour warranty

### **Optional Accessories:**

- 2 drawer kit (AXR.UCGN.DK.2)
- Height increase channel spacer pair (AXR.UCGN.CH) (3 required)

AXR.UCGN.4

• 1/1GN shelf with runners (AXR.UCGN.SHELFKIT)


### **Specifications**

Model

Power

W x D x H (mm) 2230 x 700 x 840 Weiaht 151kg Packed Dimensions (mm) 2260 x 760 x 880 Packed Weight 176kg **Net Capacity** 368 Litres 0°C - 6°C Operation R290 Refrigerant Climate Class Max Ambient 40°C

> 0.37kW 230VAC 10A plug & lead

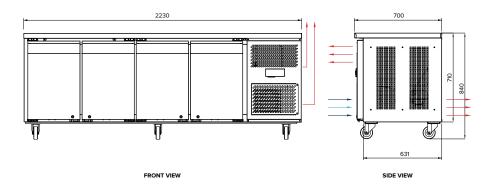

Due to continuous product research and development, the information contained herein is subject to change without notice.



