


NEC LED-FE009i2-165

Indoor LED 0.95 mm 165" UHD Bundle

## Datasheet

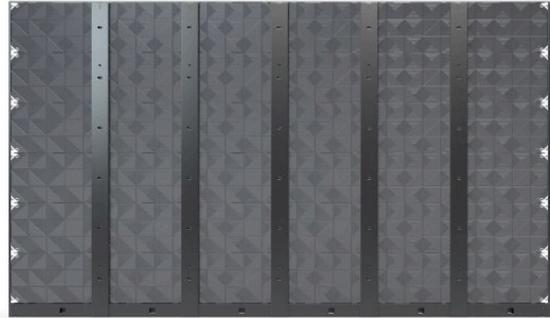

### Enhanced detail and realism

Adding a super-fine pixel pitch option to the FE Series, NEC's LED FE009i2 modules and bundles offer excellent visual performance and high information density. Configure an ultra-high-resolution canvas at a screen size of just 165", ideal for meeting rooms and signage applications, even where viewing distances are short.

By using an innovative 4-in-1 IMD diode design, reality-like image presentation at high resolution and detail can be achieved without interruption from bezels or gaps, delivering excellent viewing angles, consistent vibrant colours and superb brightness.

NEC's FE Series provides long-lasting NEC quality with industrial-grade power supplies in easy to install, off the shelf bundle solutions for safe operation and minimal downtimes.

## Benefits

**Care-free installation** - with bundled solutions that deliver all you need to get your LED video wall up and running.

**Large scale for perfectly detailed imagery** - completely bezel-less design with high contrast rates deliver an unhindered viewing experience.

**Slim design** - with a flush rear profile, LED modules can be integrated very close to the wall with minimal gap necessary due to very low heat emission.

**Front serviceable modules** - with front access to the LED modules, maintenance is easy.

**Visual excellence** - high contrast and high brightness is inherent in LED delivery, benefit from NEC's long lasting quality.

## Product Information

Product Name	NEC LED-FE009i2-165
Product Group	Indoor LED 0.95 mm 165" UHD Bundle
Order Code	LED-FE009i2-165

## Display

Pixel Configuration	4-in-1 IMD (Black)
LED type	IMD (1616)
Screen Size [inch/cm]	165 / 419
Aspect Ratio	16:9
Pixel Pitch [mm]	0.95
Brightness (max.) [cd/m <sup>2</sup> ]	600
Lifetime	100000 hrs (50% brightness)
Contrast Ratio (typ.)	5000:1
Viewing Angle [°]	140 horizontal / 140 vertical
Dimming Capability	256 levels
Colour Processing	16 bit
Colours [Trill.]	281
LED Driving Method	1/46 dynamic scan
Frame Rate [Hz]	50/60
Refresh Rate [Hz]	≤ 3840
Colour Temperature [K]	3000 - 9500

## Screen Resolution

Resolution	3840 x 2160
Resolution per m <sup>2</sup>	1108033
Number of Pixel per module [dot]	640 x 360
Number of Pixel per card [dot]	160 x 180

## Connectivity

Input Video Digital	1 x 3G SDI; 1 x DVI-D; 1 x HDMI
Input Control	1 x GenLock; 1 x LAN

## Electrical

Total Power Consumption [W]	2880 typ. / 5400 max.
Power Consumption typ. [W]	380 per m <sup>2</sup> (normal use)
Power Consumption max. [W]	720 per m <sup>2</sup>

## Environmental Conditions

Operating Temperature [°C]	-20 to 40
Operating Humidity [%]	10 to 80

## Mechanical

Dimensions (W x H x D) [mm] per module	608 x 342 x 49
Dimensions (W x H x D) [mm]	3,688 x 2,173.5 x 82
Weight [kg]	390.8

## Additional Features

Shipping Content	2x LED Controller; LED Modules (36 Cabinets, 288 Pixel Cards); Overframe Kit (6x6); Pixel Card Removal Tool; Power Bar; Spare Parts Kit; Wall mount (6x6)
Special Characteristics	Cableless Connector for Data and Power; Flush Surface SMD Design; Humidity-proof SMD Design; Single Data Receiving Cards; Single Power Supplies
Manufacturer	NEC
Serviceability	Front Service
IP Level	IP20
Certifications	CE; ETL; FCC Class A; RoHS; RCM
Warranty	3 years warranty
Material	Aluminum Cabinet

\* 165 inch

This document is © 2024 Sharp Corporation of Australia.

All rights reserved in favour of their respective owners. All hardware and software names are brand names and/or registered trademarks of the respective manufacturers. All specifications are subject to change without notice. Errors and omissions are excepted. 03.03.2024