

Wall Hung Toilet Pan - Standard

Model: SPPL.TP.WH.4.S

SPPL = Stoddart Plumbing Product

TP = Toilet Pan

WH.4 = Wall Hung Type 4


S = Standard

eg.: for specification and ordering quote


Code: SPPL.TP.WH.4.S

Features and Benefits:

- Hydraulically formed seat with smooth radius to inner and outer edges for safety and comfort.
- Seat area is sloped to drain into the bowl for improved hygiene
- Heavy duty (500kg) load carrying capacity (depending on wall structure)
- Concealed plumbing and fixing points for security and vandal resistance
- Engineered flushing rim prevents hiding of contraband while allowing free flow of flush water
- Powder coated to colour of choice optional
- Optional 316 grade stainless steel suitable for highly corrosive and coastal environments
- These toilets can be flushed with either a flush valve or in-wall cistern (ordered separately)




Plan View




5mm S/S Rear Fixing Plate

Rear View



Front View

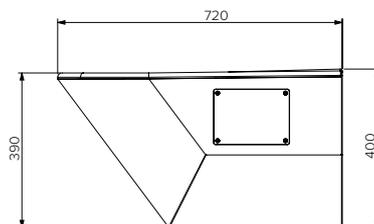

End View

Specifications:

- Construction:** Toilet bowl and Trap – 304 stainless steel. Seat, Body and shroud – 2mm 304 stainless steel no.4 satin finish
- Flushing:** WELS approved 4.5L full flush/3L half flush. Flushing device must be able to deliver 1.4 litres per second to the toilet pan (as per AS1172).
- Water Connection:** Inlet Key-Seal supplied for 40mm flush pipe.
- Waste Connection:** P trap standard, with rubber coupling included to suit 100mm PVC.
- Unit Fixing:** The unit is designed to be fixed to the rear wall with 4 x Ø16 stainless steel bolts.

Sold Separately

Flushing Device Options:



FD.CI.IW.MDF



FD.CI.IW.EFV



FD.CI.IW.PRF



FD.CI.IW.PRF.CB

Toilet Seat Options:



CMPL.0915



CMPL.1005



CMPL.0814



Due to continuous product research and development, the information contained herein is subject to change without notice.

Revision: A3 - 16/06/23

www.stoddart.com.au

www.stoddart.co.nz

