FIORIK






Product Information:

- Class leading, European style, professional quality and reliability since 1963
- 700 series, high performance gas char grill (57.6 MJ/h)
- Piezo ignition burners with flame failure device and pilot burner
- Temperature regulation via variable power flame control
- Lava stone rack over burners spreads and radiates heat while vaporising fats for that authentic char grill taste
- Supplied standard with specialised V-shaped meat char plate to capture and drain fat to front drip tray while providing defined char markings
- Full fish char plate (SPGI.2009356) and 1/2 meat, 1/2 fish char plate (SPGI.2012437) sold separately
- Supplied with removable internal grease tray, ash drawer and $2 \times 1/2$ char plates
- Robust 304 grade stainless steel construction with rounded corners and splashguards
- Open base with optional doors available (SPGI.2016437)
- Height adjustable stainless steel feet for a 900mm working height
- 24-month warranty

General Drawing:

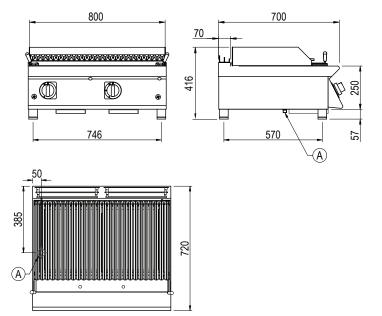

Specifications:

| Model | GL740TGCT |
|------------------------|-----------------|
| W x D x H (mm) | 800 x 720 x 416 |
| Weight | 70kg |
| Packed Dimensions (mm) | 850 x 825 x 570 |
| Packed Weight (mm) | 80Kg |

| | Natural | Universal LPG |
|--------------------------------------|-----------|---------------|
| Gas Connection | 1/2" BSP | 1/2" BSP |
| Minimum Normal Test Gas Pressure | 1.3 kPa | 2.75 kPa |
| Maximum Normal Test Gas Pressure | 3.5 kPa | 3.5 kPa |
| Nominal Test Point Pressure | 1.0 kPa | 2.65 kPa |
| Total Nominal Gas Consumption | 57.6 MJ/h | 57.6 MJ/h |

Note: It is the responsibility of the installing gas plumber to ensure correct supply and connection sustaining appropriate pressure, when all installed gas appliances are operating at maximum.

Legend:

A Gas Connection

Due to continuous product research and development, the information contained herein is subject to change without notice.

Revision: A - 27/06/2024 - 02

www.stoddart.com.au www.stoddart.co.nz



