

TROUGHS


Knee Operated Wash Trough

Model: SPPL.WT.KO.x.yyyy


SPPL = Stoddart Plumbing Product
 WT = Wash Trough
 KO = Knee Operated
 x = L = Left Waste
 = R = Right Waste
 yyyy = Nominated Length
 eg: for specification and ordering quote
 Code: SPPL.WT.KO.R.1200

Features and Benefits:


- Easy Push front panel for hygienic hands free washing
- Lead free compliant
- Timed flow valve with automatic shut off
- Radius corners for easy cleaning, hygiene and safety
- 50mm waste outlet can be positioned at either left or right hand end
- Each Easy Push panel is backed with 18mm ply and double skinned to provide a robust and durable application
- Easy mount bracket has adjustable fixing positions
- Freestanding frame option available

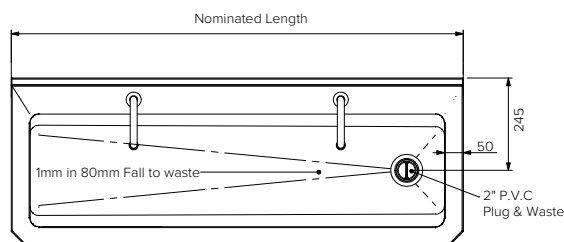

Plan View

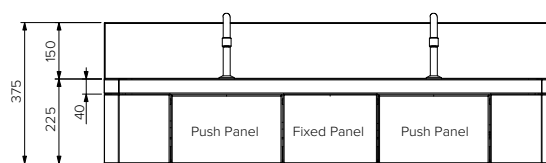

Front View



End View

Specifications:

Construction: Fully welded seamless 304 grade 1.2 mm thick stainless steel construction, no.4 satin finish. 150mm x 20mm splashback for cleanliness, safety and secure mounting to wall.

Water Connection: 15mm (1/2") BSP

Waste Connection: 50mm PVC waste supplied

Activation Valve: Timed flow valve is fitted to each knee operated push panel

Unit Fixing: The unit is supplied with stainless steel wall mounting brackets, includes Z clips

Model No.	L x D x H (mm)	No. of Spouts
SPPL.WT.KO.x.1200	1200 x 445 x 375	2
SPPL.WT.KO.x.1800	1800 x 445 x 375	3
SPPL.WT.KO.x.2400	2400 x 445 x 375	4
Custom depths available		



Due to continuous product research and development, the information contained herein is subject to change without notice.

Revision: C - 29/04/2026 - 01

www.stoddart.com.au
 www.stoddart.co.nz