


Porcelain Steel Panels

Whiteboard Resurfacing Material

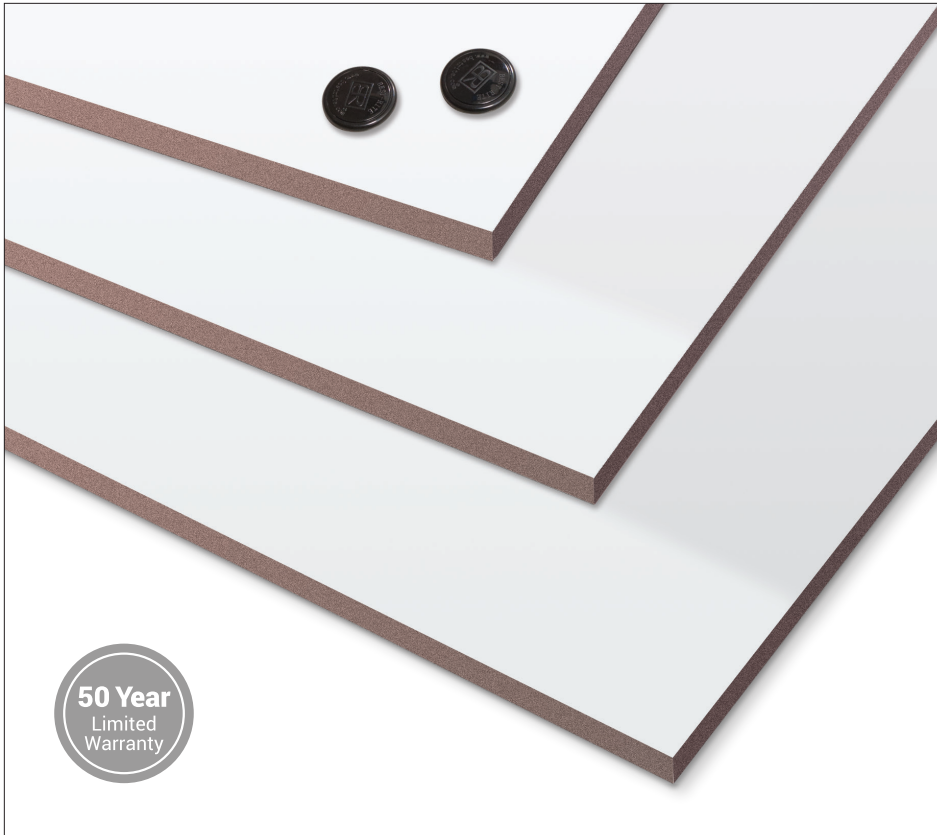

Porcelain Steel Panels

- Renew or replace any torn or worn board with high end porcelain steel whiteboard panels. Panels also available with a chalkboard surface.
- Magnetic porcelain steel dry erase surface is engineered for superior color contrast with dry erase markers. Standard gloss porcelain provides superior writability and erasability with no ghosting. Reduced surface light distortion enhances visibility to provide optimum eye comfort.
- Porcelain steel layer is permanently laminated to MDF, retaining rigidity while staying easy to handle. Available in .25" or .5" thick panels.
- Panel roller and adhesive available to ensure easy installation.
- Made in the USA. TAA compliant. Fifty year limited warranty.

Part No.	Description	Product Dimensions	Ship Wt.
Porcelain Steel Panel - Quarter Inch			
2H2XD	.25" panel	4'H x 4'W	48 lbs
2H2XG	.25" panel	4'H x 6'W	72 lbs
2H2XH	.25" panel	4'H x 8'W	96 lbs
2H2XK	.25" panel	4'H x 10'W	120 lbs
2H2XM	.25" panel	4'H x 12'W	144 lbs
Porcelain Steel Panel - Half Inch			
202XD	.5" panel	4'H x 4'W	72 lbs
202XG	.5" panel	4'H x 6'W	108 lbs
202XH	.5" panel	4'H x 8'W	144 lbs
202XK	.5" panel	4'H x 10'W	180 lbs
202XM	.5" panel	4'H x 12'W	216 lbs
Optional Accessories			
545*	Panel Roller	9'H x 9'W	5 lbs
531*	Panel Adhesive	4 Tubes (covers 16 sq ft)	4 lbs

*Ships UPS
Shipping weights are listed on a per item basis and may vary based on quantities ordered.

Porcelain Steel Technical Information

- Multipurpose magnetic surface with superior writability and erasability for dry erase markers. Superior contrast and reduced surface light distortion minimizes glare for optimum eye comfort.
- A precisely balanced porcelain enamel ground coat is furnace-fused to both sides of 28 gauge (standard) or 24 gauge (custom) steel.
- The first furnace fuses a ground coat of enamel that is heat-softened at approximately 1450° F. The second furnace firing fuses a coat of enamel to the ground coat enamel. Color Fusion ceramic top coat is applied providing the desired surface color.
- A fade resistant waterproof resin glue bonds the porcelain to a moisture-resistant core and .005" polyester foil backer sheet. Also available with upgraded sheet aluminum backer. Custom sizes are available. Off-white is standard.



MooreCo | Balt | Best-Rite

2885 Lorraine Avenue | Temple, TX 76501
P. 800.749.2258 | F. 866.888-7483

www.moorecoinc.com